



Field Measuring Instruments



Field-Proven Strength.

Measurement • Protection • Advancement


Since 1935



In our mission to provide measurement technologies that protect the safety of society, we seek to contribute to the advancement of a brighter and more prosperous future.

Hioki's measurement technology is widely used in the maintenance, repair and operation of factories, businesses and infrastructures, contributing to the safety and security of our daily lives.

We also support the development of next generation technologies in the automotive and new energy sectors by delivering high quality instruments at a reasonable cost.

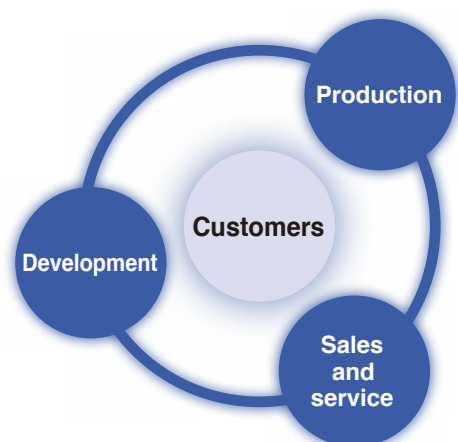

Founded in 1935, Hioki has grown to become a world leader in providing consistent delivery of tests and measuring instruments. By integrating both R&D and manufacturing in a central facility, we succeed in implementing a fully sustainable end-to-end product innovation life cycle to deliver instruments characterized by precision, safety, and quality to customers around the world.

HIOKI, an R&D-focused company

Technology advances on a daily basis, making possible safer and more comfortable human lifestyles and helping make dreams come true. The measuring instruments that underpin these advances also continue to evolve. To develop electrical measuring instruments that meet the changing needs of our times, one-third of all HIOKI employees work in research and development, an area where we invest approximately 10% of all revenue.

Pursuing agile production

HIOKI works to implement optimal production structures that are capable of meeting changing market needs with high-quality products. Due to the nature of electrical measuring instruments, which serve as yardsticks for measuring electricity, it is necessary to ensure a high level of quality in their production. Working with the cooperation of suppliers, we continuously strive to ensure our manufacturing operations conform to the world's highest standards of product quality.

Practicing customer-centric sales

Working with distributors, we actively visit customers to resolve their concerns. Information obtained during these visits is also utilized in product development, laying the groundwork for our ability to create products that satisfy our customers.




Contents

About the Catalog	p. 2
Applications Factory	p. 4
Applications Data Centers	p. 6
Applications Residences & Commercial Buildings	p. 8
Manage Measurement Data on Tablets and PCs	p. 10
Calibration and Repair Service	p. 56

Clamp Meters	pp. 12-21	Clamp
Insulation Testers	pp. 22-27	Insulation
DMMs	pp. 28-35	Tester
Phase Detectors Voltage Detectors	pp. 36-37	Detectors
Earth Testers	pp. 38-39	Earth
Power Quality Analyzers (Options)	pp. 40-41 pp. 44-45	Power quality
Power Consumption Meters (Options)	pp. 42-43 pp. 44-45	Power consumption
Battery Testers	pp. 46-47	Battery
PV Maintenance	p. 48	PV
Data Loggers	pp. 49-52	Logger
LAN Cable Testers	p. 53	LAN
Signal Generators	p. 53	Signal
Lux Testers	p. 54	Lux
Temperature Testers	p. 55	Temperature

About the Catalog

About the Marks

	Compliant with CE
	Compliant with CSA
	New product



*Android, Google Play and the Google Play logo are trademarks of Google Inc.

*iOS is a registered trademark of Cisco Technology, Inc. and/or its affiliates in the United States and certain other countries.

*iPhone, iPad, iPad mini, iPad Pro and iPod touch are trademarks of Apple Inc.















*Apple and the Apple logo are trademarks of Apple Inc. App Store is a service mark of Apple Inc.

*Microsoft, Windows, Windows Vista, and Excel are either registered trademarks or trademarks of Microsoft Corporation in the United States and/or other countries.
















*Company names and Product names appearing in this catalog are trademarks or registered trademarks of various companies.

*The Bluetooth® word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. and any use of such marks by HIOKI E.E. CORPORATION is under license.

*For the latest information about countries and regions where wireless operation is currently supported, please visit the HioKI website.


	Safety standard measurement categories*
	Drop proof Robust design capable of withstanding a drop from a height of 1 m onto concrete
	Backlight
	Auto power OFF Automatically turns off after a certain time
	Display hold
	True RMS True RMS measurement for accurate measurement of even distorted current waveforms
	Low-pass filter Cuts high frequency content to provide stable numerical values for measurement
	AUTO AC/DC Automatically detects and measures AC and DC voltage
	Decibel conversion Displays AC voltage measurements converted to decibel values (dbm/dbv)
	MAX/MIN/AVG value* Displays the maximum, minimum, and average of the displayed values
	Peak measurement* Displays the wave maximum and minimum peak values
	Relative display Pressing the REL button displays subsequent measurements as values relative to that displayed when the button was pressed
	Current sensor can be connected
	Flexible current sensor can be connected

*For more detailed information, please refer to the next page.

	AC voltage
	DC voltage
	DCV + ACV
	Frequency
	Resistance
	Capacitance
	Temperature
	ACA current
	DCA current
	DCA + ACA
	DC Power
	Continuity check Buzzer sounds when continuity is detected
	Diode check Displays voltage if in the correct direction, and OVER if in the reverse direction
	Voltage detection Buzzer sounds when AC voltage is detected
	Inrush (Rush current) Measures inrush current when power is turned on, etc.

Measurement Category · Anticipated Transient Overvoltage

Under safety standards (EN61010 Series, JIS C 1010 Series), measurement is classified into Categories II to IV according to the measurement point's rated voltage to ground, current capacity (size of current that flows in a short-circuit fault), etc., and the transient overvoltage that occurs at the measurement point.

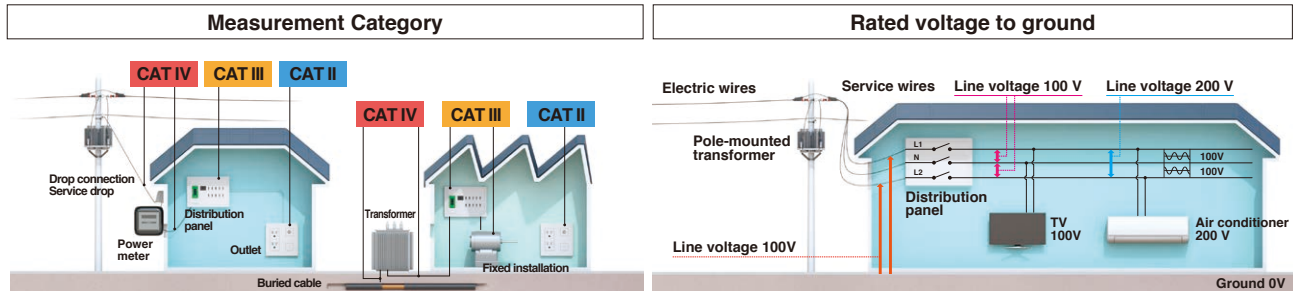

CAT II : Measurement at a point from the power plug to the equipment's power circuits, where equipment is directly connected to an outlet.

CAT III : Measurement at a point on the power distribution cabling or power supply circuits, or at a point from the distribution panel to a distribution terminal behind an outlet, where equipment (for example a fixed installation) takes electricity directly from a distribution panel.

CAT IV : Measurement at a point on a service drop to a building, or on the line from the drop connection to the power meter or distribution panel.

Anticipated Transient Overvoltage

Rated voltage to ground	Transient overvoltage		
	CAT II	CAT III	CAT IV
300 V	2500 V	4000 V	6000 V
600 V	4000 V	6000 V	8000 V
1000 V	6000 V	8000 V	12000 V
1500 V	8000 V	10000 V	15000 V
2000 V	12000 V	15000 V	18000 V

Power lines in factories and similar facilities will at times include transient overvoltage (impulse voltage) that is around 10 times the power source voltage.

The transient overvoltage of the measurement points must be predicted in advance, and the instrument will need a safety design that will enable it to withstand such overvoltage.

Marks


CAT IV 600V
Measurement Category Rated voltage to ground

Assuming 600 V for the measurement point's voltage to ground, a Category IV location could potentially include transient overvoltage of 8000 V. Hence, CAT IV measurement instruments are designed to withstand transient overvoltage of 8000 V. CAT III measurement instruments can only withstand up to 6000 V, so if 8000 V transient overvoltage enters, it will cause insulation breakdown that could result in electric shock.

Never measure a measurement point with a higher category number than the category indicated on the measuring instrument. Doing so could lead to a serious accident such as electric shock.


Rectification Methods: True RMS and Mean

A measuring instrument uses one of two rectification methods, "True RMS" or "Mean". Using mean rectification assumes that the signal is based on a sine wave without distortions in order to calculate the value. Distorted waveforms cannot be measured accurately using this method. As the performance of equipment increases, so do distorted waveforms. In order to accurately measure in these situations, using the True RMS method is necessary.

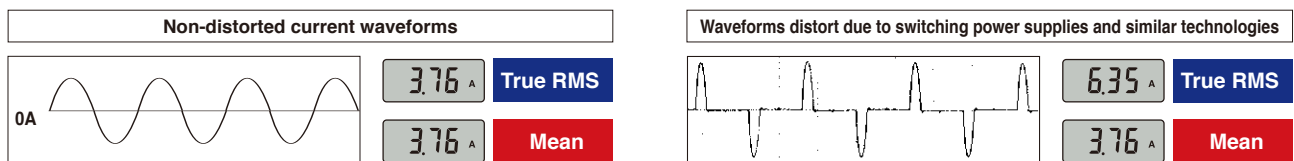


Low-Pass Filter Reduces the Effects of Harmonics and Measures the Fundamental Wave Component Accurately

Switching power supplies and the secondary side of inverters include harmonic components. Waveforms containing harmonics are distorted and difficult to measure with accuracy. By using a low-pass filter to remove harmonic components, accurate measurement values can be obtained.

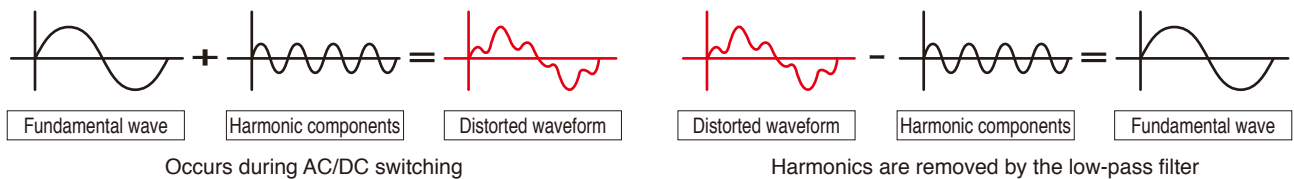


MAX/MIN/AVG/PEAK value

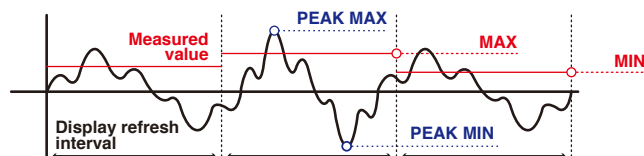





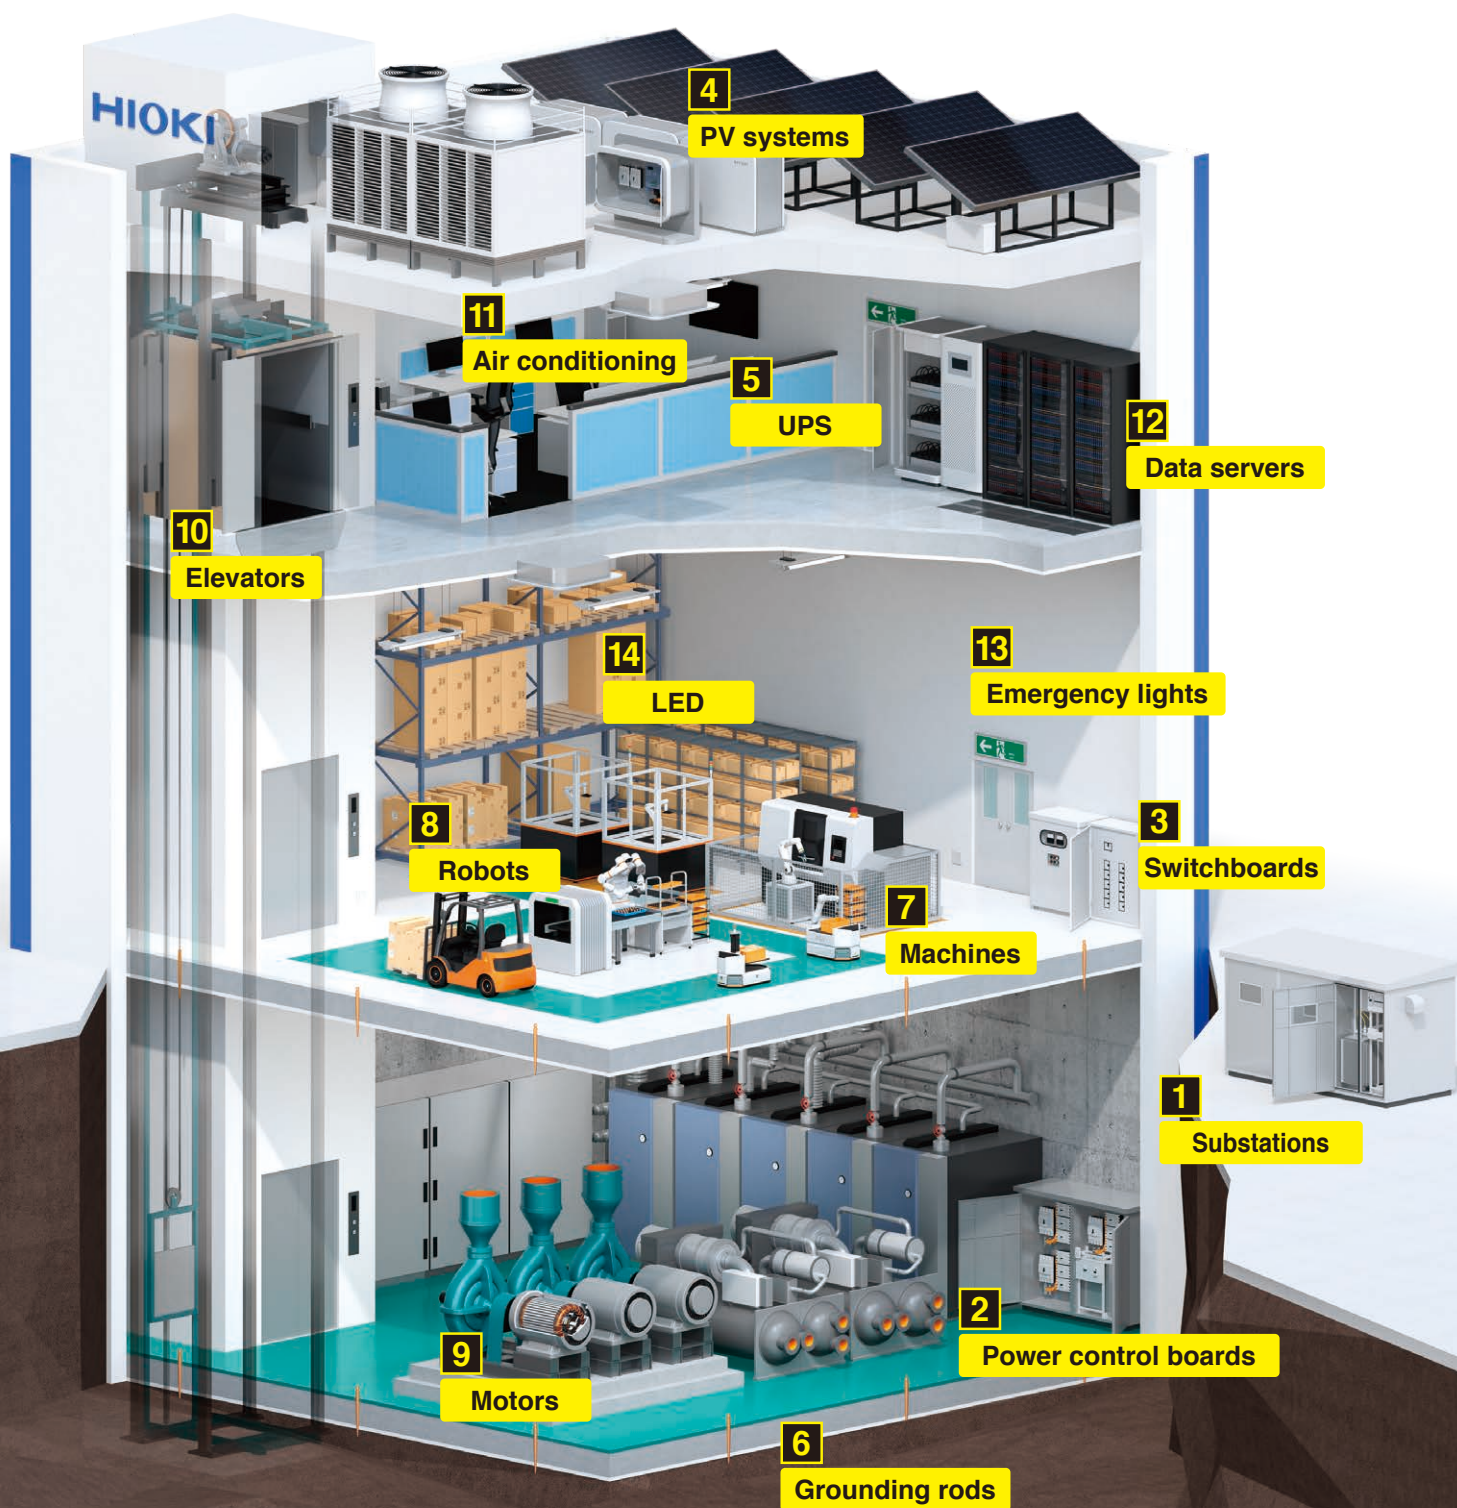



The ability to identify the maximum, minimum, average, and crest maximum and minimum values for equipment like machine tools whose load current fluctuates is useful in preventive maintenance and quality control.

Applications Factory



1 2 3**Power receiving and transforming equipment • Power Control Boards • Switchboards**

Verify phase rotation  <p>PD3259 (pp. 36-37) PD3129 (pp. 36-37)</p>	Test insulation  <p>IR405Xs (pp. 22-27)</p>	Test supply voltage  <p>DT42XXs (pp. 28-35)</p>	Verify load current  <p>CM437Xs (pp. 12-21) CM414Xs (pp. 12-21)</p>	Detect leakage current  <p>CM4001 (pp. 12-21) CM4002 (pp. 12-21) CM4003 (pp. 12-21)</p>	Detect electrical disturbances • Analyze power quality  <p>PQ3100 (pp. 40-45) PQ3198 (pp. 40-45)</p>	Record and analyze electrical consumption  <p>PW3360 (pp. 42-45) PW3365 (pp. 42-45)</p>	Test 5kV insulation  <p>IR3455 (p. 27)</p>
--	--	--	--	--	--	--	---








4**PV systems**

Test bypass diodes  <p>FT4310 (p. 48)</p>	Verify grounding  <p>FT6031 (pp. 38-39)</p>	Test PV insulation  <p>IR4053 (pp. 22-27)</p>	Verify string voltage  <p>DT4261 + P2000 (pp. 28-35)</p>	Verify string voltage  <p>CM4XXXs + P2000 (pp. 12-21)</p>	Verify string current  <p>CM437Xs (p. 12-21)</p>	Test battery resistance and voltage  <p>BT3554 (pp. 46-47)</p>	Verify grounding  <p>FT6031 (pp. 38-39)</p>
--	--	--	---	--	--	---	--

5**UPS****6****Earth • Ground****7 8 9****Machines • Robots • Motors**

Test supply voltage  <p>DT425Xs (pp. 28-35) DT4261 (pp. 28-35) DT428Xs (pp. 28-35)</p>	Test load current  <p>CM437Xs (pp. 12-21) CM414Xs (pp. 12-21)</p>	Check temperature  <p>FT3700 (p. 54) FT3701 (p. 54)</p>	Verify motor insulation  <p>IR405Xs (pp. 22-27)</p>	Test supply voltage  <p>DT425Xs (pp. 28-35) DT428Xs (pp. 28-35)</p>	Test load current  <p>CM437Xs (pp. 12-21) CM414Xs (pp. 12-21)</p>	Verify phase rotation  <p>PD3259 (pp. 36-37) PD3129 (pp. 36-37)</p>
---	--	--	--	--	---	--


10**Elevators****11****Air conditioning**

Check temperature and humidity  <p>LR5001 (pp. 49-52) LR8514 (pp. 49-52)</p>	Check temperature  <p>FT3700 (p. 54) FT3701 (p. 54)</p>	Test insulation  <p>IR405Xs (pp. 22-27)</p>	Test supply voltage  <p>DT425Xs (pp. 28-35) DT4261 (pp. 28-35) DT428Xs (pp. 28-35)</p>	Test load current  <p>CM437Xs (pp. 12-21) CM414Xs (pp. 12-21)</p>	Verify LAN wiring  <p>3665 (p. 53)</p>	Measure illuminance  <p>FT3424 (p. 54) FT3425 (p. 54)</p>
---	--	--	---	--	--	--

12**Servers****13 14****Emergency lights**





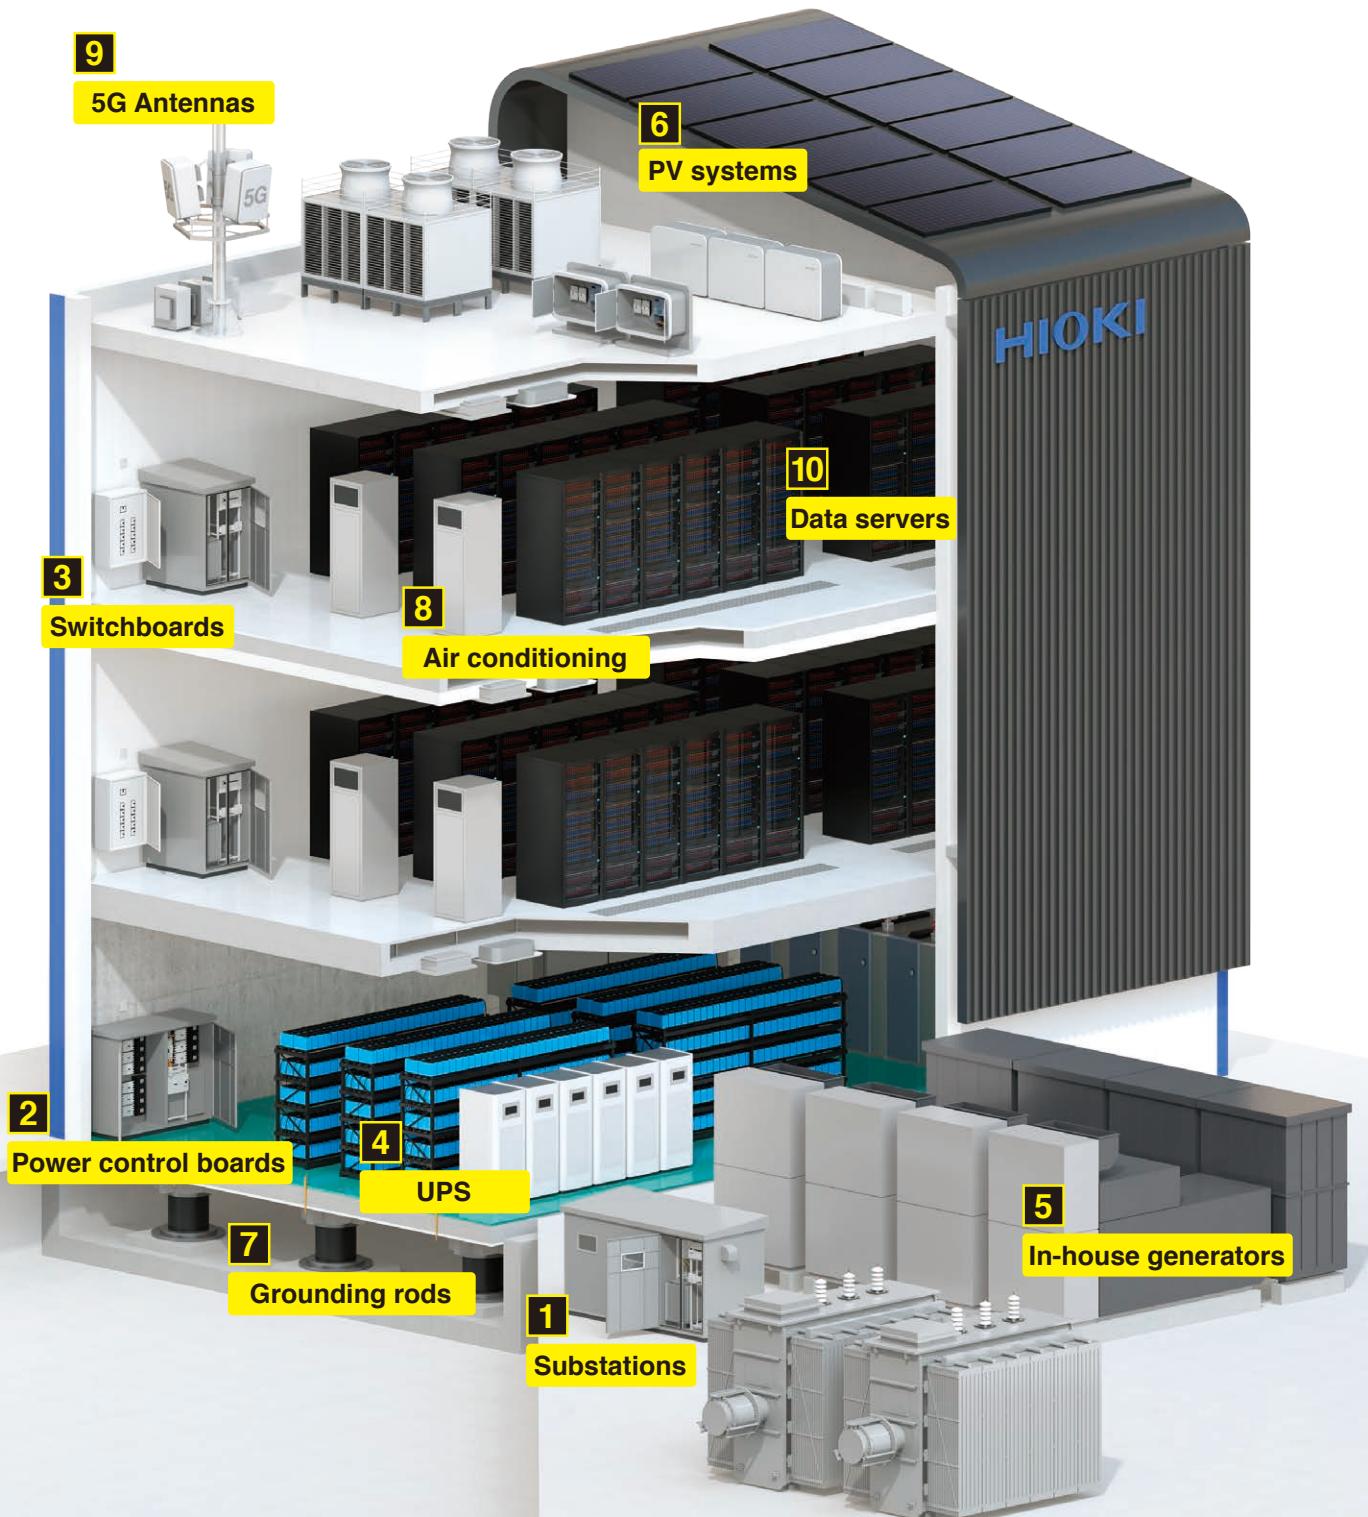



Applications

Data Centers



1 2 3

Power receiving and transforming equipment • Power control boards • Switchboards






Verify phase rotation  <p>PD3259 (pp. 36-37) PD3129 (pp. 36-37)</p>	Test insulation  <p>IR405Xs (pp. 22-27)</p>	Test supply voltage  <p>DT42XXs (pp. 28-35)</p>	Verify load current  <p>CM437Xs (pp. 12-21) CM414Xs (pp. 12-21)</p>	Detect leakage current  <p>CM4001 (pp. 12-21) CM4002 (pp. 12-21) CM4003 (pp. 12-21)</p>	Detect electrical disturbances • Analyze power quality  <p>PQ3100 (pp. 40-45) PQ3198 (pp. 40-45)</p>	Record and analyze electrical consumption  <p>PW3360 (pp. 42-45) PW3365 (pp. 42-45)</p>	Test 5kV insulation  <p>IR3455 (p. 27)</p>
--	--	--	--	--	---	--	---

4

UPS

5

Power generators


Test battery resistance and voltage  <p>BT3554 (pp. 46-47)</p>	Verify motor insulation  <p>IR405Xs (pp. 22-27)</p>	Test supply voltage  <p>DT425Xs (pp. 28-35) DT4261 (pp. 28-35) DT428Xs (pp. 28-35)</p>	Test load current  <p>CM437Xs (pp. 12-21) CM414Xs (pp. 12-21)</p>	Verify phase rotation  <p>PD3259 (pp. 36-37) PD3129 (pp. 36-37)</p>
---	--	---	--	--

6

PV systems

7

Earth • ground







Test bypass diodes  <p>FT4310 (p. 48)</p>	Verify grounding  <p>FT6031 (pp. 38-39)</p>	Test PV insulation  <p>IR4053 (pp. 22-27)</p>	Verify string voltage  <p>DT4261 + P2000 (pp. 28-35)</p>	Verify string voltage  <p>CM4XXXs + P2000 (pp. 12-21)</p>	Verify string current  <p>CM437Xs (pp. 12-21)</p>	Verify grounding  <p>FT6031 (pp. 38-39)</p>
--	--	--	---	--	--	--

8 9

Air conditioning • 5G Antennas


10

Servers







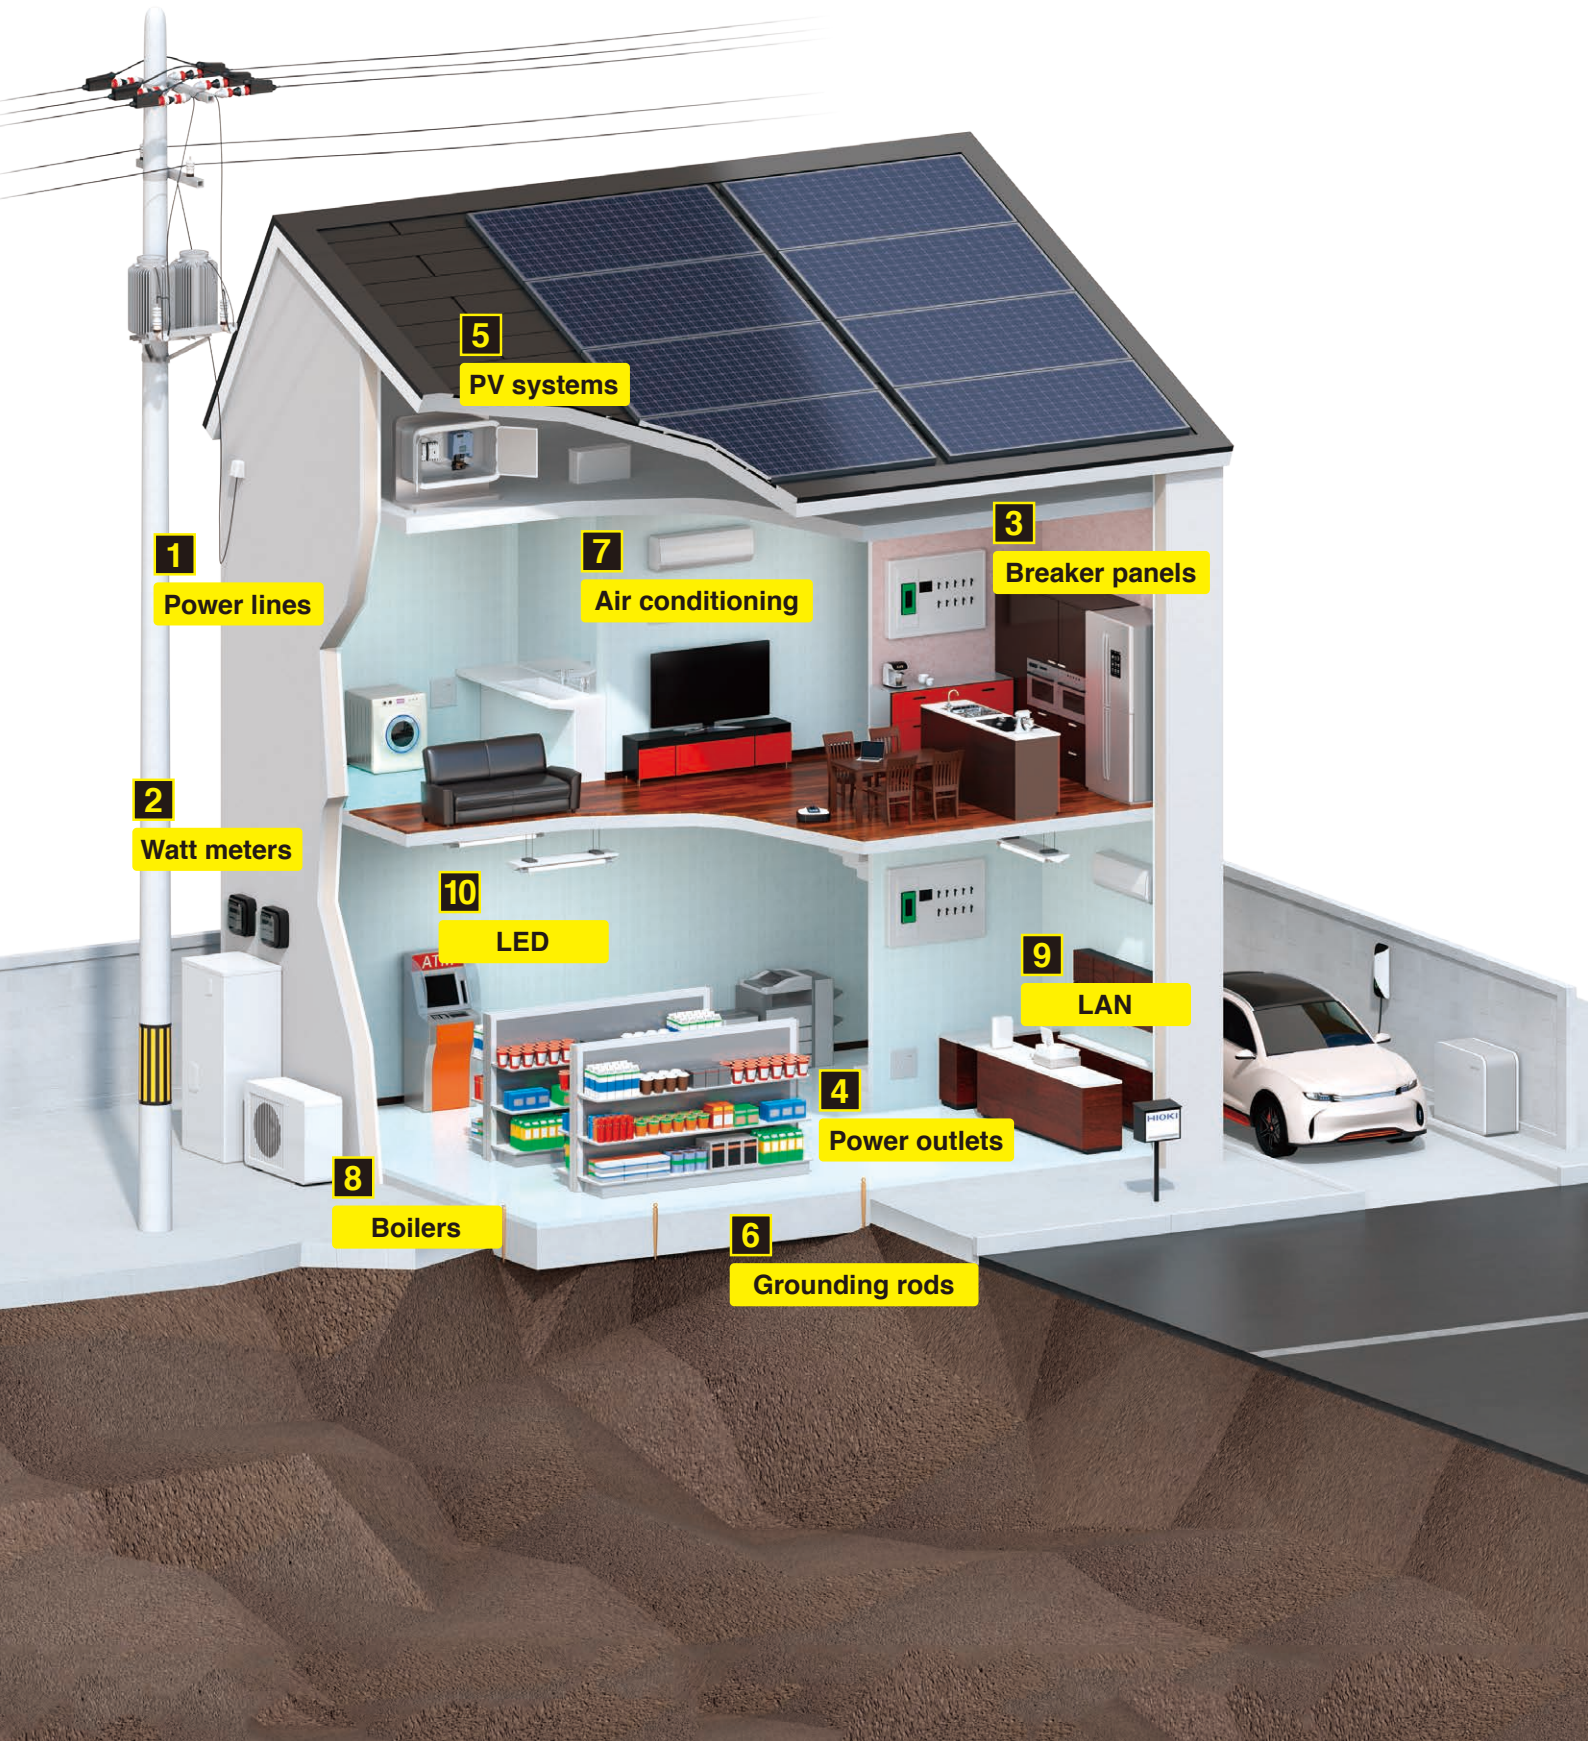

Check temperature and humidity  <p>LR5001 (pp. 49-52) LR8514 (pp. 49-52)</p>	Check temperature  <p>FT3700 (p. 54) FT3701 (p. 54)</p>	Test insulation  <p>IR405Xs (pp. 22-27)</p>	Test supply voltage  <p>DT425Xs (pp. 28-35) DT4261 (pp. 28-35) DT428Xs (pp. 28-35)</p>	Test load current  <p>CM437Xs (pp. 12-21) CM414Xs (pp. 12-21)</p>	Verify LAN wiring  <p>3665 (p. 53)</p>
---	--	--	---	--	---

Applications

Residences & Commercial Buildings



1 2 3**Power lines • Watt meters • Breaker panels**

Test insulation	Test supply voltage	Verify load current	Detect leakage current	Record and analyze electrical consumption	Verify absence of voltage	Test supply voltage	Verify load current
							
IR405Xs (pp. 22-27)	DT42XXs (pp. 28-35)	CM437Xs (pp. 12-21) CM414Xs (pp. 12-21)	CM4001 (pp. 12-21) CM4002 (pp. 12-21) CM4003 (pp. 12-21)	PW3360 (pp. 42-45) PW3365 (pp. 42-45)	3481 (p. 37)	3244 (p. 34) 3246 (p. 34)	CM328Xs (pp. 12-21) CM3291 (pp. 12-21)







4**Power outlets****5****PV systems**

Test bypass diodes	Verify grounding	Test PV insulation	Verify string voltage	Verify string voltage	Verify string current	Verify grounding
						
FT4310 (p. 48)	FT6031 (pp. 38-39)	IR4053 (pp. 22-27)	DT4261 + P2000 (pp. 28-35)	CM4XXXs + P2000 (pp. 12-21)	CM437Xs (pp. 12-21)	FT6031 (pp. 38-39)

6**Earth • ground****7****Air conditioning**

Check temperature and humidity	Check temperature	Test insulation	Test supply voltage	Test load current	Detect leakage current
					
LR5001 (pp. 49-52) LR8514 (pp. 49-52)	FT3700 (p. 54) FT3701 (p. 54)	IR4050s (pp. 22-27)	DT42XXs (pp. 28-35)	CM437Xs (pp. 12-21) CM414Xs (pp. 12-21)	CM4001 (pp. 12-21) CM4002 (pp. 12-21) CM4003 (pp. 12-21)

8**Boilers**

Test insulation	Test supply voltage	Test load current	Detect leakage current	Verify LAN wiring	Measure illuminance
					
IR405Xs (pp. 22-27)	DT42XXs (pp. 28-35)	CM437Xs (pp. 12-21) CM414Xs (pp. 12-21)	CM4001 (pp. 12-21) CM4002 (pp. 12-21) CM4003 (pp. 12-21)	3665 (p. 53)	FT3424 (p. 54) FT3425 (p. 54)

9**LAN****10****LED**

Manage Data on Mobile Devices and PC



for mobile devices

GENNECT Cross




GENNECT Cloud expands your potential.

GENNECT Cross
Dedicated website




Checking and saving measured values

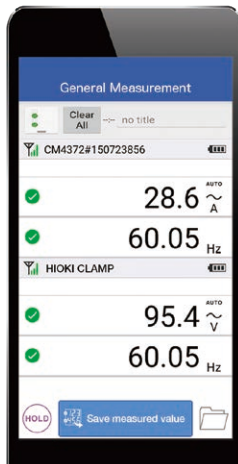


The measurement values displayed on the instrument can be displayed and saved on the tablet in real time.

Record fluctuations in measured values

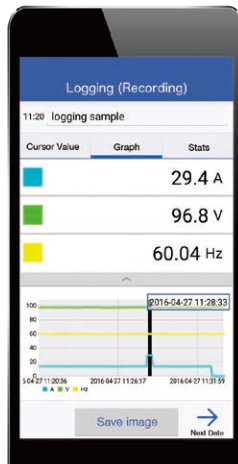


Measurement values can be saved at set recording intervals. You can also check the maximum, minimum, and average values.

Waveform observation/FFT analysis

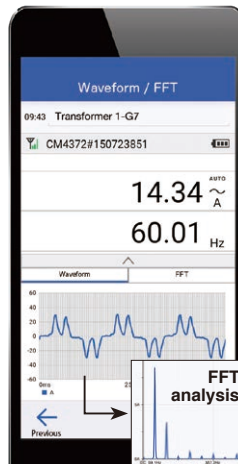


Waveforms such as current and voltage, and FFT analysis waveforms can be displayed.

Record on photos and drawings

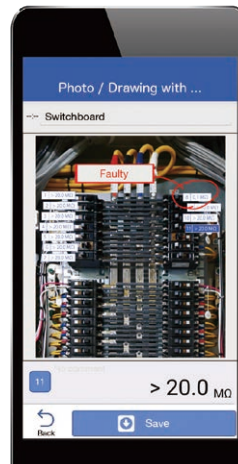


Measurements can be recorded on top of captured photos or imported drawing data.

Report writing

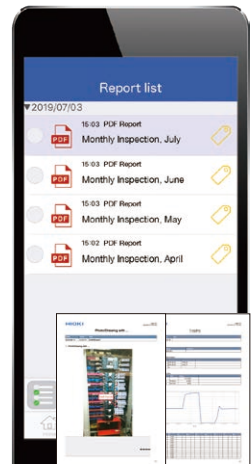


You can create reports from saved data, exporting them as PDF, JPG, or CSV.

Display judgment results in color and bar graph

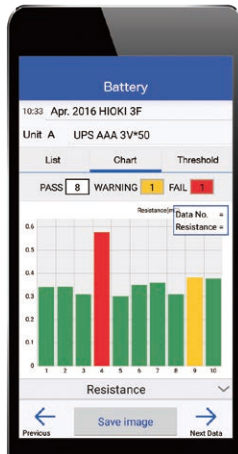


The measured value is compared with the judgment value, and the result is displayed in PASS/WARNING/FAIL.

Check power quality by analyzing harmonics up to the 30th order

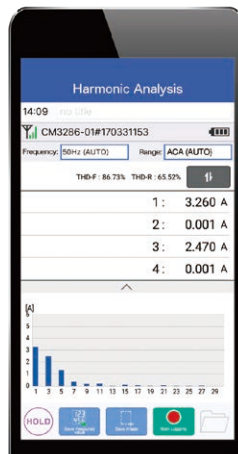


Calculate and display harmonic levels for individual orders, content percentages, and total harmonic distortion (THD-F and THDR).

Record the occurrence of intermittent leakage current

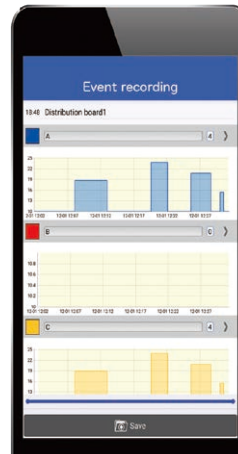


When a value greater than the threshold is measured, the time of occurrence, end time, and the maximum value for that period are recorded.

Display of disequilibrium rates and vector diagrams

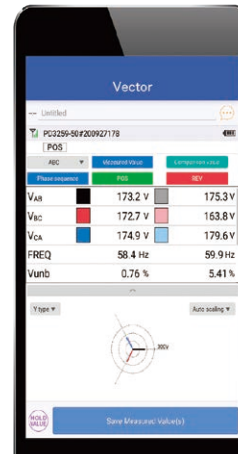

Displays the disequilibrium rate and vector diagram.

Audio guidance about the battery measurement sequence

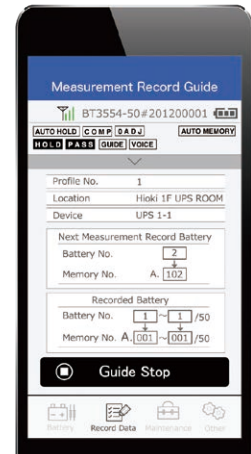

The app provides audio guidance about the battery measurement sequence. And, automatically saves the measurement results.

Supported instruments (Available functions vary depending on the measurement device. For details, please visit the GENNECT Cross special website.)

Wireless adapter Z3210 (optional) must be attached to use GENNECT Cross.



Downloading GENNECT Cross

Data can be downloaded to tablets and smartphones using Hioki's dedicated apps available from the Google Play or App Store. Search for "HIOKI" and download the "GENNECT Cross" app




for PCs

GENNECT One



GENNECT Cloud expands your potential.

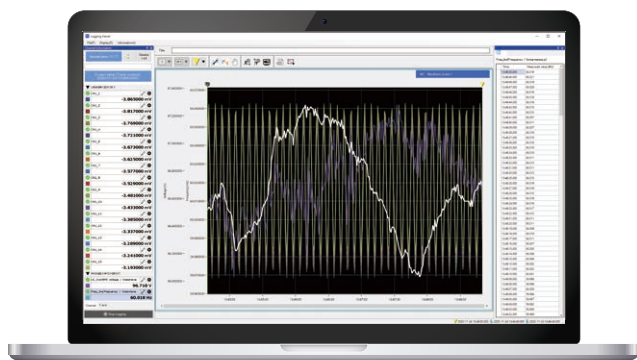GENNECT One
Dedicated website
**HUB**

Connect each measuring instrument
with LAN cable
(BT3554-5x series is USB connection)

LAN



Power Analysis

LAN

Monitoring Power
Quality


LAN

Understanding
Power
Consumption

LAN

Voltage and
temperature
management

LAN

Waveform
Analysis

USB



UPS Inspection



Connect to and manage instruments with a computer

Collect and Display measured values by instrument



Collect values in graphs and lists

Logging: When logging is started, measurement data is acquired at regular intervals from multiple measuring instruments. The acquired data is displayed and stored on the PC in real time.



Combine images and other elements

Dashboard: Create a dashboard by laying out measurements, background images, and other parts on the screen. You can display the measured values on the dashboard in real time.

Change instrument settings from your office




Change instrument settings from a computer

Remote control: Available to change the settings of the instrument and start and stop the measurement from the PC.

Instrument clock synchronization: The clock of the measuring instrument can be synchronized with the PC clock.


Collect and organize measurement files from scattered locations



Transfer measurement files to a computer

Automatic file transfer: Measurement data stored in the instrument can be automatically transferred to the PC.

Data import: The measurement data stored in the instrument can be transferred to the PC manually.




Review acquired files on a single time axis

Time-series viewer: After acquiring the measurement data stored in the main unit of the instrument, the data can be checked in a single time series.

Supported instruments (Available functions vary depending on the measurement device. For details, please visit the GENNECT One special website.)

PW8001
PW6001
PW3390PQ3198
PQ3100PW3365
PW3360LR8400
LR8401
LR8402

LR8410

LR8450
LR8450-01

MR6000

BT3554-50
BT3554-51
BT3554-52

Downloading GENNECT One

GENNECT One is a free PC application. Please download from the HIOKI website by going to the "GENNECT One" landing page.



CLAMP METERS

Remarkable Ease of Use, New "Slim Jaw" Design

Traditional design



Slim Jaw



Easily Clamp Within Crowded Cables with New Slim Jaw Design

Innovative slim jaw resolves worksite issues such as crowded wiring to deliver safe, accurate and high-performance testing.



CM4375-50

CM4141-50

CM3289

CM3281
CM3291

CM4001


Manage measurement data using Z3210^{*1}



WIRELESS
ADAPTER
Z3210 (Option)



Attach to enable
Bluetooth® wireless
technology



Transport to the Excel® file

Open an Excel® file and select a cell. The measured value being held on the instrument's display will be transferred to the computer and entered into the selected cell.



Learn more
Z3210



PDF Reports
CSV
Measurement data
JPG Image data

Transport to GENNECT Cross

GENNECT Cross, a free app designed specifically for use with Hioki measuring instruments, lets you check and manage measurement results and create reports. The software provides a range of functionality that helps manage data in the field, including photographing measurement sites, placing measurement results on photographs, and saving hand written memos.



Learn more
GENNECT Cross



Verify current waveforms
on your mobile device

Safety PV measurement using P2000^{*2}

Available to measure 2000 V DC
DC HIGH VOLTAGE PROBE
P2000 (Option)



CAT IV 1000 V
CAT III 2000 V



CM4371-50

CM4373-50


CM4375-50

CM4141-50


^{*1}: Supported models : CM4371-50, CM4373-50, CM4375-50, CM4141-50, CM4001, CM4002, CM4003, CM3286-50 (Requires attaching WIRELESS ADAPTER Z3210)

^{*2}: Supported models : CM4371-50, CM4373-50, CM4375-50, CM4141-50 (Requires using DC HIGH VOLTAGE PROBE P2000)

Lineup





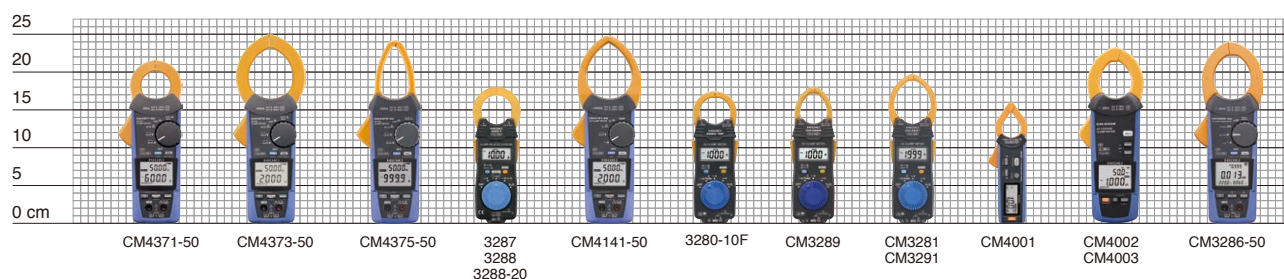



Measurement type		AC / DC Current				
Model	CM4371-50	CM4373-50	CM4375-50	3287	3288 3288-20	
Appearance						
Core jaw diameter	φ33 mm (1.30 in)	φ55 mm (2.17 in)	φ34 mm (1.34 in)	φ35 mm (1.38 in)	φ35 mm (1.38 in)	
AC measurement system	True RMS	True RMS	True RMS	True RMS	MEAN Value True RMS (-20)	
Frequency characteristics	10 Hz to 1 kHz	10 Hz to 1 kHz	10 Hz to 1 kHz	10 Hz to 1 kHz	10 Hz to 500 Hz	
Measurement parameters	AC current (Resolution) Guaranteed accuracy range	600 A (0.01) 1 A to 600 A	2000 A (0.1) 1 A to 2000 A	1000 A (0.1) 1 A to 999.9 A	100 A (0.01) Full display range ⁵	1000 A (0.1) Full display range ⁵
	DC current (Resolution)	600 A (0.01)	2000 A (0.1)	999.9 A (0.1)	100 A (0.01)	1000 A (0.1)
	AC Voltage	1000 V	1000 V	1000 V	600 V	600 V
	DC Voltage	1000 V/2000 V ¹	1000 V/2000 V ¹	1000 V/2000 V ¹	600 V	600 V
	Power	1200 kVA (DC) ¹	4000 kVA (DC) ¹	2000 kVA (DC) ¹	N / A	N / A
	Resistance	6 MΩ	6 MΩ	6 MΩ	42 MΩ	42 MΩ
	Temperature	-40°C to 400°C	-40°C to 400°C	-40°C to 400°C	N / A	N / A
	Electrostatic capacity	✓	✓	✓	N / A	N / A
	Frequency	999.9 Hz	999.9 Hz	999.9 Hz	N / A	N / A
	Rush current	✓	✓	✓	N / A	N / A
	Continuity check	✓	✓	✓	✓	✓
	Diode check	✓	✓	✓	N / A	N / A
	Non-Contact Voltage	✓	✓	N / A	N / A	N / A
Low-pass filter	✓	✓	✓	N / A	N / A	
Auto power off	✓	✓	✓	✓	✓	
Auto range	✓	✓	✓	✓	✓	
Data hold	AUTO / MANUAL	AUTO / MANUAL	AUTO / MANUAL	MANUAL	MANUAL	
Automatic AC/DC detection	✓	✓	✓	N / A	N / A	
MAX / MIN / AVG	✓	✓	✓	N / A	N / A	
Output	N / A	N / A	N / A	N / A	N / A	
Bluetooth® communication	✓ (with Z3210)	✓ (with Z3210)	✓ (with Z3210)	N / A	N / A	
Backlight	✓	✓	✓	N / A	N / A	
Display refresh rate	5 times / s	5 times / s	5 times / s	2.5 times / s	2.5 times / s	
Safety standard category	CAT IV 600 V CAT III 1000 V	CAT IV 600 V CAT III 1000 V	CAT IV 600 V CAT III 1000 V	V: CAT III 300 V A: CAT III 600 V	V: CAT III 300 V A: CAT III 600 V	
Safety standard category (with P2000)	CAT IV 1000 V CAT III 2000 V	CAT IV 1000 V CAT III 2000 V	CAT IV 1000 V CAT III 2000 V	N / A	N / A	
CE	✓	✓	✓	✓	✓	
Dustproof and waterproof	IP20 ² /IP54 ³	IP20 ² /IP54 ³	IP20 ² /IP54 ³	N / A	N / A	
Drop proof	N / A	N / A	N / A	N / A	N / A	
Power supply	LR03 ×2 Alkaline	LR03 ×2 Alkaline	LR03 ×2 Alkaline	CR2032 ×1 Coin type	CR2032 ×1 Coin type	
Dimensions (W × H × D)	65 × 215 × 35 mm 2.56 × 8.46 × 1.38 in	65 × 250 × 35 mm 2.56 × 9.84 × 1.38 in	65 × 242 × 35 mm 2.56 × 9.53 × 1.38 in	57 × 180 × 16 mm 2.24 × 7.09 × 0.63 in	57 × 180 × 16 mm 2.24 × 7.09 × 0.63 in	
Weight	340 g / 12.0 oz	530 g / 18.7 oz	350 g / 12.3 oz	170 g / 6.0 oz	150 g / 5.3 oz	

Size comparison



*1: Only when DC HIGH VOLTAGE PROBE P2000 is used *2: Voltage measurement in a completely dry condition. When jaw closes. *3: While in storage

*4: When measuring the current in an insulated conductor. Do not use it when wet. *5: Displayed 0 with below 0.06

Measurement type		AC Current					Leakage Current		AC Power
Model	CM4141-50	3280-10F	CM3289	CM3281	CM3291	CM4001	CM4002 CM4003	CM3286-50	
Appearance									
Core jaw diameter	φ55 mm (2.17 in)	φ33 mm (1.30 in)	φ33 mm (1.30 in)	φ46 mm (1.81 in)	φ46 mm (1.81 in)	φ24 mm (0.94 in)	φ40 mm (1.57 in)	φ46 mm (1.81 in)	
AC measurement system	True RMS	MEAN Value	True RMS	MEAN Value	True RMS	True RMS	True RMS	True RMS	
Frequency characteristics	45 Hz to 1 kHz	50 / 60 Hz	40 Hz to 1 kHz	50 / 60 Hz	40 Hz to 1 kHz	40 Hz to 1 kHz	15 Hz to 2 kHz	45 Hz to 1 kHz	
Measurement parameters	AC current (Resolution) Guaranteed accuracy range	2000 A (0.01) 1 A to 2000 A	1000 A (0.01) 4 A to 1000 A	1000 A (0.01) 4 A to 1000 A	2000 A (0.01) 4 A to 1999 A	2000 A (0.01) 4 A to 1999 A	600 A (0.01mA)) 0.6 mA to 600 A	200 A (0.001mA) 0.06 mA to 200 A	600 A (0.001) 0.06 A to 600 A
	DC current (Resolution)	N / A	N / A	N / A	N / A	N / A	N / A	N / A	N / A
	AC Voltage	1000 V	600 V	600 V	600 V	600 V	N / A	N / A	600 V
	DC Voltage	1000 V/2000 V ^{*1}	600 V	600 V	600 V	600 V	N / A	N / A	N / A
	Power	N / A	N / A	N / A	N / A	N / A	N / A	N / A	360 kW (AC)
	Resistance	6 MΩ	42 MΩ	42 MΩ	42 MΩ	42 MΩ	N / A	N / A	N / A
	Temperature	-40°C to 400°C	N / A	N / A	N / A	N / A	N / A	N / A	N / A
	Electrostatic capacity	✓	N / A	N / A	N / A	N / A	N / A	N / A	N / A
	Frequency	999.9 Hz	N / A	N / A	N / A	N / A	999.9 Hz	2000 Hz	999.9 Hz
	Rush current	✓	N / A	N / A	N / A	N / A	✓	✓	N / A
	Continuity check	✓	✓	✓	✓	✓	N / A	N / A	N / A
	Diode check	✓	N / A	N / A	N / A	N / A	N / A	N / A	N / A
	Non-Contact Voltage	N / A	N / A	N / A	N / A	N / A	N / A	N / A	N / A
Low-pass filter	✓	N / A	N / A	N / A	N / A	✓	✓	N / A	
Auto power off	✓	✓	✓	✓	✓	✓	✓	✓	
Auto range	✓	✓	✓	✓	✓	✓	✓	✓	
Data hold	AUTO / MANUAL	MANUAL	MANUAL	MANUAL	MANUAL	AUTO / MANUAL	AUTO / MANUAL	AUTO / MANUAL	
Automatic AC/DC detection	✓ (Voltage only)	N / A	N / A	N / A	N / A	N / A	N / A	N / A	
MAX / MIN / AVG	✓	N / A	N / A	N / A	N / A	✓	✓	✓	
Output	N / A	N / A	N / A	N / A	N / A	N / A	✓ (CM4003 only)	N / A	
Bluetooth® communication	✓ (with Z3210)	N / A	N / A	N / A	N / A	✓ (with Z3210)	✓ (with Z3210)	✓ (with Z3210)	
Backlight	✓	N / A	N / A	N / A	N / A	✓	✓	✓	
Display refresh rate	5 times / s	2.5 times / s	2.5 times / s	2.5 times / s	2.5 times / s	5 times / s	5 times / s	2 times / s	
Safety standard category	CAT IV 600 V CAT III 1000 V	V: CAT III 300 V A: CAT IV 300 V	V: CAT III 300 V A: CAT IV 300 V	V: CAT III 300 V A: CAT IV 300 V	V: CAT III 300 V A: CAT IV 300 V	CAT III 300 V	CAT IV 300 V (CM4002) CAT III 600 V (CM4002) CAT III 300 V (CM4003)	CAT IV 600 V CAT III 1000 V	
Safety standard category (with P2000)	CAT IV 1000 V CAT III 2000 V	N / A	N / A	N / A	N / A	N / A	N / A	N / A	
CE	✓	✓	✓	✓	✓	✓	✓	✓	
Dustproof and waterproof	IP50 ^{*3,4}	IP40 ^{*3}	N / A	N / A	N / A	N / A	IP40	IP20 ^{*2} /IP50 ^{*3}	
Drop proof	N / A	✓	✓	✓	✓	N / A	N / A	N / A	
Power supply	LR03 x2 Alkaline	CR2032 x1 Coin type	CR2032 x1 Coin type	CR2032 x1 Coin type	CR2032 x1 Coin type	LR03 x1 Alkaline	LR6 x2 Alkaline	LR03 x2 Alkaline	
Dimensions (W × H × D)	65 × 247 × 35 mm 2.56 × 9.72 × 1.38 in	57 × 175 × 16 mm 2.24 × 6.89 × 0.63 in	57 × 181 × 16 mm 2.24 × 7.13 × 0.63 in	57 × 198 × 16 mm 2.24 × 7.80 × 0.63 in	57 × 198 × 16 mm 2.24 × 7.80 × 0.63 in	37 × 160 × 27 mm 1.46 × 6.30 × 1.06 in	64 × 233 × 36 mm 2.52 × 9.17 × 1.41 in	65 × 241 × 35 mm 2.56 × 9.49 × 1.38 in	
Weight	300 g / 10.6 oz	100 g / 3.5 oz	100 g / 3.5 oz	103 g / 3.6 oz	103 g / 3.6 oz	115 g / 4.1 oz	400 g / 14.1 oz	450 g / 15.9 oz	

Test leads with an integrated cap for greater convenience and safety



CAT IV 600 V/CAT III 1000 V

CAT II 1000 V




The L9300 test lead with an integrated cap is included as a standard. The finger guard can be easily slid to switch between measurement categories without worrying about losing the cap.

AC/DC Current



Product warranty for 3 years
Accuracy guaranteed for 1 year

AC/DC CLAMP METER CM4371-50, CM4373-50, CM4375-50



Included accessories



- L9300 C0203
- LR03 Alkaline battery x2
- Instruction manual

φ35 mm = 1.30 in



CM4371-50

600 A AC/DC

True RMS

CAT IV 600 V
CAT III 1000 V

With P2000

CAT IV 1000 V DC
CAT III 2000 V DC

With Z3210



Please see www.hioki.com
for list of supported regions.



GENNECT
Cross

φ55 mm = 2.17 in



CM4373-50

2000 A AC/DC

True RMS

CAT IV 600 V
CAT III 1000 V

With P2000

CAT IV 1000 V DC
CAT III 2000 V DC

With Z3210



Please see www.hioki.com
for list of supported regions.



GENNECT
Cross

φ34 mm = 1.34 in



CM4375-50

1000 A AC/DC

True RMS

CAT IV 600 V
CAT III 1000 V

With P2000

CAT IV 1000 V DC
CAT III 2000 V DC

With Z3210



Please see www.hioki.com
for list of supported regions.



GENNECT
Cross



WIRELESS ADAPTER
Z3210 (Option)
**Attach to enable Bluetooth®
wireless technology**



DC HIGH VOLTAGE PROBE
P2000 (Option)
Available to measure 2000 V DC

CLAMP ON AC/DC HiTESTER 3287, 3288, 3288-20



Product warranty for 3 years
Accuracy guaranteed for 1 year



Included accessories



L9208 9398

- Coin type lithium battery CR2032x1
- Instruction manual

φ35 mm = 1.38 in



3287

100 A AC/DC

True RMS

V: CAT III 300 V
A: CAT III 600 V

φ35 mm = 1.38 in



3288

1000 A AC/DC

True RMS

V: CAT III 300 V
A: CAT III 600 V

φ35 mm = 1.38 in



3288-20

1000 A AC/DC

True RMS

V: CAT III 300 V
A: CAT III 600 V



For more details

Clamp

Insulation

DIMMS

Detectors

Earth

Power
qualityPower
consumption

Battery

PV


Logger

LAN

Signal

Lux

Temperature



Model	CM4371-50	CM4373-50	CM4375-50		Basic accuracy
Measurement parameters	✓	N / A	N / A	20.00 A/600.0 A (guaranteed accuracy range: 1.00 A to 600.0 A)	±1.3% rdg ±0.08 A
	N / A	✓	N / A	600.0 A/2000 A (guaranteed accuracy range: 1.0 A to 2000 A)	±1.3% rdg ±0.3 A
	N / A	N / A	✓	1000 A (guaranteed accuracy range: 1.0 A to 999.9 A)	±1.3% rdg ±0.3 A
	✓	N / A	N / A	20.00 A/600.0 A (guaranteed accuracy range: ±1.00A to ±600.0 A)	±1.3% rdg ±0.08 A
	N / A	✓	N / A	600.0 A/2000 A (guaranteed accuracy range: ±1.0A to ±2000 A)	±1.3% rdg ±0.3 A
	N / A	N / A	✓	1000 A (guaranteed accuracy range: ±1.0 A to ±999.9 A)	±1.3% rdg ±0.3 A
	✓	N / A	N / A	20.00 A/600.0 A (guaranteed accuracy range: 1.00 A to 600.0 A)	±1.3% rdg ±0.13 A
	N / A	✓	N / A	600.0 A/2000 A (guaranteed accuracy range: 1.0 A to 2000 A)	±1.3% rdg ±1.3 A
	N / A	N / A	✓	1000 A (guaranteed accuracy range: 1.0 A to 999.9 A)	±1.3% rdg ±1.3 A
	✓	✓	✓	6.000 V/60.00 V/600.0 V/1000 V	±0.9% rdg ±0.003 V
AC Voltage	✓	✓	✓	600.0 mV/6.000 V/60.00 V/600.0 V/1000 V/2000 V ²	±0.5% rdg ±0.5 mV
DC Voltage	✓	✓	✓	6.000 V/60.00 V/600.0 V/1000 V	±1.0% rdg ±0.13 V
AC + DC Voltage	✓	N / A	N / A	0.0 VA to ±1200 kVA ²	±2.0% rdg ±20 dgt
DC Power	N / A	N / A	N / A	0.000 kVA to ±4000 kVA ²	±2.0% rdg ±20 dgt
	N / A	✓	✓	0.000 kVA to ±2000 kVA ²	±2.0% rdg ±0.020 kVA
Resistance	✓	✓	✓	600.0 Ω/6.000 kΩ/60.00 kΩ/600.0 kΩ/6.000 MΩ	±0.7% rdg ±0.5 Ω
Temperature	✓	✓	✓	-40.0°C to 400.0°C	±0.5% rdg ±3.0°C
Electrostatic capacity	✓	✓	✓	1.000 μF/10.00 μF/100.0 μF/1000 μF	±1.9% rdg ±0.005 μF
Frequency	✓	✓	✓	9.999 Hz/99.99 Hz/999.9 Hz	±0.1% rdg ±0.003 Hz

Display refresh rate	5 times/s ³
Operating temperature	-25°C to 65°C, 90% RH or less (non-condensating)
Storage temperature	-30°C to 70°C, 90% RH or less (non-condensating)
Dustproof and waterproof	IP20 ⁴ /IP54 ⁵
Power supply	Alkaline battery LR03 x2
Continuous operating time	40 hours ⁶
Dimensions (W x H x D)	CM4371-50: 65 x 215 x 35 mm (2.56 x 8.46 x 1.38 in) CM4373-50: 65 x 250 x 35 mm (2.56 x 9.84 x 1.38 in) CM4375-50: 65 x 242 x 35 mm (2.56 x 9.53 x 1.38 in)
Weight	CM4371-50: 340 g (12 oz) CM4373-50: 530 g (18.7 oz) CM4375-50: 350 g (12.3 oz)

Order code **CM4371-50**

Includes Z3210

Order code **CM4373-50**Order code **CM4371-90**Order code **CM4375-50**Order code **CM4373-90**Order code **Z3210**Order code **CM4375-90**Order code **P2000**

Includes P2000

Order code **CM4373-91**Order code **CM4375-91**

Includes Z3210 and P2000

Order code **CM4373-92**Order code **CM4375-92**

*1: Excludes CM4375-50

*2: Only when DC HIGH VOLTAGE PROBE P2000 is used

*3: Excludes electrostatic capacity, frequency, and temperature

*4: Voltage measurement in a completely dry condition. When jaw closes.

*5: While in storage

*6: With backlight and Bluetooth® communications turned OFF



Model	3287	3288	3288-20		Basic accuracy
Measurement parameters	✓	N / A	N / A	10.00 A/100.0 A (Display range: 0A to 10.00 A/100.0 A)	±1.5% rdg ±5 dgt
	N / A	✓	✓	100.0 A/1000 A (Display range: 0A to 100.0 A/1000 A)	±1.5% rdg ±5 dgt
	✓	N / A	N / A	10.00 A/100.0 A	±1.5% rdg ±5 dgt
	N / A	✓	✓	100.0 A/1000 A	±1.5% rdg ±5 dgt
	✓	✓	✓	4.200 V/42.00 V/420.0 V/600 V	±2.3% rdg ±8 dgt
AC Voltage	✓	✓	✓	420.0 mV/4.200 V/42.00 V/420.0 V/600 V	±1.3% rdg ±4 dgt
DC Voltage	✓	✓	✓	420.0 Ω/4.200 kΩ/42.00 kΩ/420.0 kΩ/4.200 MΩ/42.00 MΩ	±2.0% rdg ±4 dgt
Resistance	✓	✓	✓		
Display refresh rate	2.5 times/s				
Operating temperature	0°C to 40°C, 80% RH or less (non-condensating)				
Storage temperature	-10°C to 50°C, 80% RH or less (non-condensating)				
Dustproof and waterproof	N / A				
Power supply	Coin type lithium battery CR2032 x1				
Continuous operating time	25 hours				
Dimensions(W x H x D)	57 x 180 x 16 mm (2.24 x 7.09 x 0.63 in)				
Weight	3287: 170 g (6.0 oz), 3288, 3288-20: 150 g (5.3 oz)				

Order code **3287**Order code **3288**Order code **3288-20**

AC Current


AC CLAMP METER CM4141-50



Product warranty for 3 years
Accuracy guaranteed for 1 year



WIRELESS ADAPTER
Z3210 (Option)
Attach to enable **Bluetooth®**
wireless technology



DC HIGH VOLTAGE PROBE
P2000 (Option)
Available to measure 2000 V DC

Included accessories



- L9300
- C0203
- LR03 Alkaline battery x2
- Instruction manual

φ55 mm = 2.17 in



CM4141-50

2000 A AC

True RMS

CAT IV 600 V
CAT III 1000 V

With P2000

CAT IV 1000 V DC
CAT III 2000 V DC

With Z3210

Bluetooth®

Please see www.hioki.com
for list of supported regions.



GENNECT
Cross



AC CLAMP METER 3280-10F, CM3289, CM3281, CM3291

Product warranty for 3 years
Accuracy guaranteed for 1 year



Included accessories



- L9208
- CARRYING CASE (models vary as shown on right)
- Coin type lithium battery CR2032x1
- Instruction manual




φ33 mm = 1.30 in

3280-10F
3280-70F

1000 A AC

MEAN Value

V: CAT III 300 V
A: CAT IV 300 V



9398 (3280-10F)
C0205 (3280-70F)



φ33 mm = 1.30 in

CM3289

1000 A AC

True RMS

V: CAT III 300 V
A: CAT IV 300 V



9398



φ46 mm = 1.81 in

CM3281
CM3291

2000 A AC

CM3281: MEAN Value
CM3291: True RMS

V: CAT III 300 V
A: CAT IV 300 V



CARRYING CASE

Leakage Current

AC LEAKAGE CLAMP METER CM4001, CM4002, CM4003



Product warranty for 3 years
Accuracy guaranteed for 1 year



WIRELESS ADAPTER
Z3210 (Option)
Attach to enable **Bluetooth®**
wireless technology



φ24 mm = 0.94 in

CM4001

0.6 mA to 600 A AC

True RMS

CAT III 300 V

Included accessories



CARRYING CASE

- STRAP
- LR03 Alkaline battery x1
- Instruction manual

With Z3210

Bluetooth®

Please see www.hioki.com
for list of supported regions.



GENNECT
Cross



φ40 mm = 1.57 in

CM4002

0.06 mA to 200 A AC

True RMS

CAT IV 300 V
CAT III 600 V

Included accessories



C0203

- LR6 Alkaline battery x2
- Instruction manual

With Z3210

Bluetooth®

Please see www.hioki.com
for list of supported regions.



GENNECT
Cross



φ40 mm = 1.57 in

CM4003

0.06 mA to 200 A AC

True RMS

CAT III 300 V

Included accessories



C0203 L9097

- LR6 Alkaline battery x2
- Instruction manual
- USB cable

With Z3210

Bluetooth®

Please see www.hioki.com
for list of supported regions.



GENNECT
Cross

Functions

- External output
- External power supply



For more details



Model	CM4141-50		Basic accuracy
AC Current	✓	60.00 A/600.0 A/2000 A (guaranteed accuracy range: 1.00A to 2000 A)	±1.5% rdg ±0.08 A
AC Voltage	✓	6.000 V/60.00 V/600.0 V/1000 V	±0.9% rdg ±0.003 V
DC Voltage	✓	600.0 mV/6.000 V/60.00 V/600.0 V/1000 V/2000 V ^{*1}	±0.5% rdg ±0.5 mV
AC + DC Voltage	✓	6.000 V/60.00 V/600.0 V/1000 V	±1.0% rdg ±0.013 V
Resistance	✓	600.0 Ω/6.000 kΩ/60.00 kΩ/600.0 kΩ/6.000 MΩ	±0.7% rdg ±0.5 Ω
Temperature	✓	-40.0°C to 400.0°C	±0.5% rdg ±3.0°C
Electrostatic capacity	✓	1.000 μF/10.00 μF/100.0 μF/1000 μF	±1.9% rdg ±0.005 μF
Frequency	✓	9.999 Hz/99.99 Hz/999.9 Hz	±0.1% rdg ±0.003 Hz

Display refresh rate	5 times/s ²
Operating temperature	-25°C to 65°C, 90% RH or less (non-condensating)
Storage temperature	-30°C to 70°C, 90% RH or less (non-condensating)
Dustproof and waterproof	IP50 ^{*3,4}
Power supply	Alkaline battery LR03 x2
Continuous operating time	48 hours ^{*5}
Dimensions (W x H x D)	65 x 247 x 35 mm (2.56 x 9.72 x 1.38 in)
Weight	300 g (10.6 oz)

Order code **CM4141-50**Order code **CM4141-90**Order code **Z3210**

Model CM4141-90 includes Z3210 as a set


*1: Only when DC HIGH VOLTAGE PROBE P2000 is used. *2: Excludes electrostatic capacity, frequency, and temperature

*3: Voltage measurement in a completely dry condition. When jaw closes. *4: While in storage. *5 With backlight and Bluetooth® communications turned OFF



Model	3280-10F	CM3289	CM3281 · CM3291	Basic accuracy
AC Current	✓	✓	N / A	42.00 A/420.0 A/1000 A (guaranteed accuracy range: 4.00A to 1000 A)
AC Voltage	N / A	N / A	✓	42.00 A/420.0 A/2000 A (guaranteed accuracy range: 4.00A to 1999 A)
DC Voltage	✓	✓	✓	4.200 V/42.00 V/420.0 V/600 V
Resistance	✓	✓	✓	420.0 mV/4.200 V/42.00 V/420.0 V/600 V
				420.0 Ω/4.200 kΩ/42.00 kΩ/420.0 kΩ/4.200 MΩ/42.00 MΩ

Display refresh rate	2.5 times/s
Operating temperature	-25°C to 65°C, 80% RH or less (non-condensating)
Storage temperature	-25°C to 65°C, 80% RH or less (non-condensating)
Dustproof and waterproof	IP40 (EN60529)*2*3
Power supply	Coin type lithium battery CR2032 x1
Continuous operating time	3280-10F, CM3281: 120 hours CM3289: 70 hours CM3291: 70 hours
Dimensions (W x H x D)	3280-10F: 57 x 175 x 16 mm (2.24 x 6.89 x 0.63 in) CM3289: 57 x 181 x 16mm (2.24 x 7.13 x 0.63 in) CM3281, CM3291: 57 x 198 x 16 mm (2.24 x 7.80 x 0.63 in)
Weight	3280-10F: 100 g (3.5 oz) CM3289: 100 g (3.5 oz) CM3281, CM3291: 103 g (3.6 oz)



3280F, CM3289, CM3291 are compatible with the CT6280 AC Flexible Current Sensor

Φ130mm (5.1 in), 4200 A AC

Model 3280-70F includes 3280-10F AC Clamp Meter and CT6280 AC Flexible Sensor as a set

Order code **3280-10F**Order code **3280-70F**Order code **CM3289**Order code **CM3291**Order code **CM3281**

*1: Excludes 3280-10F, 3280-70F

*2: Excludes CM3289, CM3281, CM3291

*3: While in storage




Model	CM4001	CM4002	CM4003	Basic accuracy
AC Current	✓	N / A	N / A	60.00 mA/600.0 mA/6.000A/60.00A/600.0A (guaranteed accuracy range: 0.60 mA to 600.0A)
Frequency	✓	N / A	N / A	6.000 mA/60.00 mA/600.0 mA/6.000A/60.00A/200.0A (guaranteed accuracy range: 0.060 mA to 200.0A)
	N / A	✓	✓	999.9 Hz
	N / A	✓	✓	999.9 Hz/2000 Hz

Display refresh rate	5 times/s
Operating temperature	-10°C to 65°C (non-condensating)
Storage temperature	CM4001: -10°C to 65°C (non-condensating) CM4002, CM4003: -30°C to 70°C (non-condensating)
Dustproof and waterproof	CM4002, CM4003: IP40 (EN60529)
Power supply	CM4001: LR03 Alkaline battery x 1, 32 hours CM4002, CM4003: LR6 Alkaline battery x 2, 48 hours (LR6, without Z3210)
Continuous operating time	CM4003: AC ADAPTER Z1013 (Option)
Dimensions (W x H x D)	CM4001: 37 x 160 x 27 mm (1.46 x 6.30 x 1.06 in) CM4002, CM4003: 64 x 233 x 36 mm (2.52 x 9.17 x 1.41 in)
Weight	CM4001: 115 g (4.1 oz) CM4002, CM4003: 400 g (14.1 oz)

Includes external output function (CM4003 Only)

Pair with a recorder to capture instantaneous or current waveforms

**RMS value output**

(RMS mode)

DC 600 mV/f.s.

Waveform output

(WAVE mode)

AC 600 mV/f.s.

*Using CONNECTION CABLE L9097 (Included accessories)

Order code **CM4001**Order code **CM4001-90**Order code **CM4002**Order code **CM4002-90**Order code **CM4003**Order code **CM4003-90**Order code **Z3210**

Model CM4001-90, CM4002-90, CM4003-90 includes Z3210 as a set

Clamp

Insulation

DMMs

Detectors

Earth

Power quality

Power consumption

Battery

PV

Logger

LAN

Signal

Lux

Temperature

AC Power



For more details



Product warranty for 3 years
Accuracy guaranteed for 1 year

AC CLAMP POWER METER CM3286-50

φ46 mm=1.81 in



CM3286-50

AC 600 A

True RMS

CAT IV 600 V
CAT III 1000 V

With Z3210



Please see www.hioki.com for list of supported regions.



GENNECT
Cross



WIRELESS ADAPTER
Z3210 (Option)

Attach to enable Bluetooth®
wireless technology

Order code **CM3286-50**

Order code **CM3286-90**

Order code **Z3210**

Model CM3286-90
includes Z3210 as a set

Included accessories



L9257


C0203

- LR03 Alkaline battery x2
- Instruction manual


*1: Harmonics can be displayed using dedicated application software (GENNECT Cross)
*2: Voltage measurement in a completely dry condition. When jaw closes.
*3: While in storage.

Power (Active/reactive/apparent)	Single phase	3.600 kW/36.00 kW/360.0 kW Guaranteed accuracy range: 0.005 kW to 360.0 kW Basic accuracy: ±2.0% rdg ±7 dgt
	Balanced three-phase 3-wire	7.200 kW/72.00 kW/720.0 kW guaranteed accuracy range: 0.020 kW to 623.5 kW Basic accuracy: ±3.0% rdg ±10 dgt
	Balanced three-phase 4-wire	10.80 kW/108.0 kW/1080 kW guaranteed accuracy range: 0.040 kW to 1080 kW Basic accuracy: ±2.0% rdg ±3 dgt
Measurement parameters	AC Current	6.000 A/60.00 A/600.0 A Basic accuracy: ±1.0% rdg ±3 dgt
	AC Voltage	600.0 V Basic accuracy: ±0.7% rdg ±3 dgt
	Power factor	Single-phase, Balanced three-phase 4-wire: [Regeneration] -1.000 to -0.001, [Consumption] 0.000 to 1.000 Balanced three-phase 3-wire: [Regeneration] -0.001, [Consumption] 0.000 to 1.000
	Phase angle	Single-phase, Balanced three-phase 4-wire : [lead] -180.0° to -0.1°, [lag] 0.0° to 179.9° Balanced three-phase 3-wire: [lead] -90.0° to -0.1°, [lag] 0.0° to 90.0°
	Frequency	45.0 Hz to 999.9 Hz
Other	Simple Active Energy Consumption (Single-phase)	99.99 Wh/999.9 Wh/9.999 kWh/ 99.99 kWh/999.9 kWh/9999 kWh/
	Harmonic*1 (With Z3210)	Voltage or current harmonic levels up to 30th order, content factor, total harmonic distortion ratio
	Display refresh rate	2 times/s
	Operating temperature	-25°C to 65°C, 80% RH or less (non-condensating)
	Storage temperature	-25°C to 65°C, 80% RH or less (non-condensating)
	Dustproof and waterproof	IP20 ² /IP50 ³
	Power supply	LR03 Alkaline battery x2
	Continuous operating time	25 hours
	Dimensions (W × H × D)	65 × 241 × 35 mm (2.56 × 9.49 × 1.38 inch)
	Weight	450 g (15.9 oz)

Options



**3280-10F
CM3289
CM3291
3287*1, 3288*1
3288-20*1**



**CM4371-50
CM4373-50
CM4375-50
CM4141-50
CM3286-50**

1 Cable length 70 cm (2.3 ft)
With the Cap (Red x1, Black x1)
L9208

2 $\Phi 130$ mm (5.12 in)
4200 AAC
CT6280*1

*1: Not available to use
with 3287, 3288, 3288-20

1 L9300
Cable length 95 cm (3.12 ft)

2 L9207-10
Cable length 90 cm (2.95 ft)
With the Cap (Red x1, Black x1)

3 L4930
Cable length 120 cm (3.94 ft)

4 L4931
Cable length 150 cm (4.92 ft)
with the coupling connector

Include L4943 (0.65 m/2.13ft), Available extend the cable with L4930/ L4931

5 P2000*4
*4: Not available to
use with CM3286-50

Cable length 150 cm (4.92 ft) (Probe side)

6 DT4910*4
-40 to 260°C
Sensor length: 80
cm (2.62 ft)

3 L4933*2
48 mm (1.89 in)

4 L4934*2
*2: Remove the cap of L9208 before attaching it

7 L4933*3
48 mm (1.89 in)

8 L4934*3
*3: Remove the cap of L9207-10 before attaching it.
Slide the guard of the L9300 and attach it in
the measurement CAT II.

9 L9243
97 mm (3.82 in)

10 L4932
With the Cap (Red x1, Black x1)

11 L4935

12 L4936

13 L4937
30 mm (1.18 in)
Magnet : $\phi 6$ mm (0.24 in)

14 9804
Magnet : $\phi 11$ mm (0.43 in)

15 L4938
With the Cap (Red x1, Black x1)
22 mm (0.87 in), $\phi 3.7$ mm (0.15 in)


16 L4939
1 22 mm (0.87 in)
2 $\phi 3.7$ mm (0.15 in)
48 mm (1.89 in)
2 $\phi 2.6$ mm (0.1 in)

17 9290-10

3280-10F, CM3289, CM3281, CM3291, 3287, 3288, 3288-20	
1	TEST LEAD L9208
2	AC FLEXIBLE CURRENT SENSOR CT6280 For 3280-10F, CM3289, CM3281, CM3291
3	CONTACT PIN SET L4933
4	SMALL ALLIGATOR CLIP SET L4934
5	CARRYING CASE 9398 For 3280-10F, CM3289, 3287, 3288, 3288-20
6	CARRYING CASE C0205 Bundled accessory for CT6280
7	TEST LEADS HOLDER 9209 For 3280-10F, CM3289, 3287, 3288, 3288-20



CM4371-50, CM4373-50, CM4375-50, CM4141-50, CM3286-50	
1	TEST LEAD L9300
2	TEST LEAD L9207-10
3	CONNECTION CABLE SET L4930
4	EXTENSION CABLE SET L4931
5	DC HIGH VOLTAGE PROBE P2000 For CM437x-50 series, CM4141-50
6	THERMOCOUPLES(K) DT4910 For CM437x-50 series, CM4141-50
7	CONTACT PIN SET L4933
8	SMALL ALLIGATOR CLIP SET L4934
9	GRABBER CLIP L9243
10	TEST PIN SET L4932
11	ALLIGATOR CLIP SET L4935
12	BUS BAR CLIP SET L4936
13	MAGNETIC ADAPTER SET L4937
14	MAGNETIC ADAPTER SET 9804
15	TEST PIN SET L4938
16	BREAKER PIN SET L4939
17	CLAMP ON ADAPTER 9290-10 For CM3286-50
18	CONNECTION CORD L9257 Combination of L4930 and L4935
19	CARRYING CASE C0203

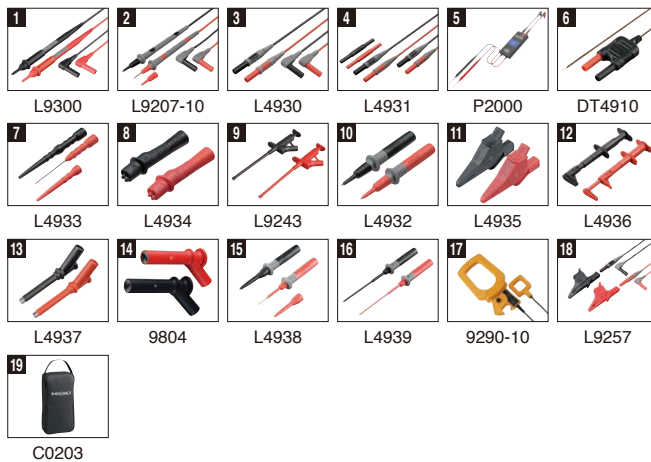

CM4002, CM4003	
1	CONNECTION CABLE L9097 For CM4003
2	CONVERSION ADAPTER 9704 For CM4003
3	AC ADAPTER Z1013 For CM4003
4	CARRYING CASE C0203



Clamp

Insulation

DIMMS

Detectors

Earth

Power
qualityPower
consumption

Battery

PV

Logger

LAN

Signal


Lux

Temperature



INSULATION TESTERS

DROP PROOF



Built tough to withstand a 1-meter drop onto a concrete floor



5 ranges

Rated output voltage (DC)
Effective maximum indicated value

50 V / 100 MΩ

125 V / 250 MΩ

250 V / 500 MΩ

500 V / 2000 MΩ

1000 V / 4000 MΩ

Manage measurement data using Bluetooth® communication



WIRELESS ADAPTER
Z3210 (Option)
Attach to enable
Bluetooth® wireless
technology



Learn More


Transport to the Excel® file



Location	Circuit no.	Ref. value	Measurement place	Value (MΩ)
Break Circuit Breaker A	L-A	SIM/D	R-E	101 M Ohm
			S-E	101 M Ohm
			T-E	101 M Ohm
			R-S	66.4 M Ohm
			S-T	99.9 M Ohm
			T-R	99.9 M Ohm

Open an Excel® file and select a cell. The measured value being held on the instrument's display will be transferred to the computer and entered into the selected cell.

Transport to GENNECT Cross




Learn More

PDF Reports


CSV Measurement data

JPG Image data

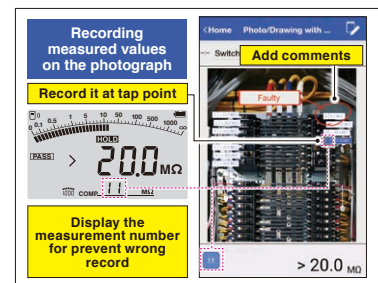

GENNECT Cross, a free app designed specifically for use with Hioki measuring instruments, lets you check and manage measurement results and create reports. The software provides a range of functionality that helps manage data in the field, including photographing measurement sites, placing measurement results on photographs, and saving handwritten memos.

Significantly improve testing speed using test lead with remote switch

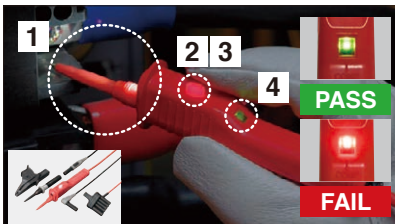

- 1 LED light shines a spotlight on the target
- 2 Red light warns of live voltage detection
- 3 Measurement start switch
- 4 Identify pass/fail decisions with red or green light

TEST LEAD SET WITH REMOTE SWITCH L9788-11 (Option)
*Standard with the IR4059 and IR4056-21

Identify PASS / FAIL using light and sound



Compare measured values to pre-set reference values to generate a pass or fail decision with the Comparator function.

Convenient for inspections

Low resistance measurement^{*1}

Perform EV and HEV continuity checks as well as resistance measurement of protective conductors in facility electrical equipment as defined by IEC 60364.

AC/DC voltage measurement

Automatically detect AC or DC for testing. Use as a tester thanks to DC voltage measurement functionality.


PV Ω dedicated function^{*2}

Measurement is not affected even when the PV system is online.

^{*1} Excludes IR4053 ^{*2} IR4053 Only

One-touch Start and Stop

Single test



Measurement voltage is applied while MEASURE key is pressed

Continuous test



Lift and lock the MEASURE key to apply a continuous stream of voltage

Prevent Accidental High Voltage Generation

Flashing light








Under [500V], [1000V], or [PVΩ] settings, the RELEASE button will blink. Press to unlock the release of high voltages as an extra safety measure.

Release lock







Lineup - Digital

Measurement type	Standard	High-speed	EV	PV	High-voltage
Model	IR4056-20 IR4056-21	IR4057-50	IR4059	IR4053-10	IR3455
Appearance	    				
Number of ranges	5	5	5	5	5
Testing voltage (DC) / Effective maximum indicated value	50 V /100 MΩ 125 V /250 MΩ 250 V /500 MΩ 500 V /2000 MΩ 1000 V /4000 MΩ				250 V /500 GΩ 500 V /1.00 TΩ 1000 V /2.00 TΩ 2500 V /5.00 TΩ 5000 V /10.0 TΩ
1st effective measuring range	0.200 to 10.00 MΩ (50 V) 0.200 to 25.0 MΩ (125 V) 0.200 to 50.0 MΩ (250 V) 0.200 to 500 MΩ (500 V) 0.200 to 1000 MΩ (1000 V)				0.00 to 500 GΩ (250 V) 0.00 to 1.00 TΩ (500 V) 0.00 to 2.00 TΩ (1000 V) 0.00 to 5.00 TΩ (2500 V) 0.00 to 10.0 TΩ (5000 V)
PV Ω measurement	N / A	N / A	N / A	✓	N / A
Leakage current	N / A	N / A	N / A	N / A	1.00 nA to 1.20 mA
DC voltage	600 V	600 V	600 V	1000 V	1.00 kV
AC voltage	600 V	600 V	600 V	600 V	750 V
Low resistance measurement	✓	✓	✓	N / A	N / A
Displaying 1-min. values	N / A	✓	✓	N / A	N / A
Comparator decision response time	✓ 0.8 second	✓ 0.3 second	✓ 0.3 second	✓ 0.8 second (PV : 4 s)	N / A
AUTO power save	✓	✓	✓	✓	✓
AUTO range	✓	✓	✓	✓	✓
Data hold	MANUAL	MANUAL	MANUAL	MANUAL	MANUAL
Bluetooth® communication	N / A	✓ (With Z3210)	✓ (With Z3210)	N / A	N / A
Bar graph	N / A	✓	✓	N / A	✓
Backlight	✓	✓	✓	✓	✓
Safety standard category	CAT III 600 V	CAT III 600 V	CAT III 600 V	CAT III 600 V	CAT IV 600 V CAT III 1000 V
CE	✓*1	✓	✓	✓	✓
Dustproof and waterproof	IP40*2	IP40*2	IP40*2	IP40*2	IP40*3
Drop proof	✓	✓	✓	✓	N / A
Power supply	LR03 × 4 alkaline	LR03 × 4 alkaline	LR03 × 4 alkaline	LR03 × 4 alkaline	LR03 × 6 alkaline
Dimensions (W × H × D)	159 × 177 × 53 mm 6.26 × 6.97 × 2.09 in	159 × 177 × 53 mm 6.26 × 6.97 × 2.09 in	160 × 98 × 46 mm 6.30 × 3.86 × 1.81 in	159 × 177 × 53 mm 6.26 × 6.97 × 2.09 in	260 × 250.6 × 119.5 mm 10.24 × 9.87 × 4.70 in
Weight	600 g (21.2 oz)	640 g (22.6 oz)	536 g (18.9 oz)	600 g (21.2 oz)	2.8 kg (98.8 oz)



Product warranty for 3 years
Accuracy guaranteed for 1 year

Lineup - Analog Meters

Measurement parameters	1 Range		IR4016 -20	Testing voltage (DC)	500 V		
			Effective maximum indicated value	100 MΩ			
			1st effective measuring range	0.1 MΩ to 50 MΩ			
			2nd effective measuring range	0.01 MΩ to 0.1 MΩ or less 50 MΩ or more to 100 MΩ			
	1 Range		IR4017 -20	Testing voltage (DC)	500 V		
			Effective maximum indicated value	1000 MΩ			
			1st effective measuring range	1 MΩ to 500 MΩ			
			2st effective measuring range	0.5 MΩ to 1 MΩ or less 500 MΩ or more to 1000 MΩ			
	1 Range		IR4018 -20	Testing voltage (DC)	1000 V		
			Effective maximum indicated value	2000 MΩ			
			1st effective measuring range	2 MΩ to 1000 MΩ			
			2nd effective measuring range	1 MΩ to 2 MΩ or less 1000 MΩ or more to 2000 MΩ			
3 Ranges		3490	Testing voltage (DC)	250 V	500 V	1000 V	
		Effective maximum indicated value	100 MΩ		4000 MΩ		
		1st effective measuring range	0.05 MΩ to 50 MΩ		2 MΩ to 1000 MΩ		
		2nd effective measuring range	0.01 MΩ to 0.05 MΩ or less 50 MΩ to 100 MΩ		0.5 MΩ to 2 MΩ 1000 MΩ to 4000 MΩ		
Accuracy (Insulation)			±2% of scale length (1st effective measuring range) ±2% of scale length (2nd effective measuring range)				
AC Voltage			0 to 600 V				

Other	Operating temperature	0°C to 40°C, 90% RH or less (non-condensating)
	Storage temperature	-10°C to 50°C, 90% RH or less (non-condensating)
	Dustproof and waterproof	IP40 (Terminal excluded)
	Drop proof	YES
	Backlight	YES
	Safety standard category	CAT III 600 V
	Standards	EN61010 (Safety), EN61326 (EMC)
	Power supply	LR6 alkaline battery x4
	Continuous operating time	20 hours
	Dimensions (W × H × D)	IR4016, IR4017, IR4018: 162 × 182 × 57 mm (6.38 × 7.17 × 2.24 in) 3490: 162 × 167 × 52 mm (6.38 × 6.57 × 2.05 in)
	Weight	IR4016, IR4017, IR4018: 820 g (28.9 oz), 3490: 840 g (29.6 oz)

Included accessories



L9787

- TEST LEAD L9787 (1.2 m)
- Neck strap
- LR6 alkaline battery x4
- Instruction manual

Order code **IR4016-20**

Order code **IR4017-20**

Order code **IR4018-20**

Order code **3490**

Clamp

Insulation

DIMMS

Detectors

Earth

Power quality

Power consumption

Battery

PV

Logger

LAN

Signal

Lux

Temperature

INSULATION TESTER IR4056-20, IR4056-21



* IR4056-20 only

Product warranty for 3 years
Accuracy guaranteed for 1 year

Included accessories

- TEST LEAD L9787
- Neck strap
- LR6 alkaline battery x4
- Instruction manual

IR4056-20



Included accessories

- TEST LEAD SET WITH REMOTE SWITCH L9788-11
- Neck strap
- LR6 alkaline battery x4
- Instruction manual

IR4056-21 Not CE marked



5 ranges

Comparator decision response time : 0.8 s

CAT III 600 V

INSULATION TESTER IR4057-50, IR4059



* IR4057-50 only

Product warranty for 3 years
Accuracy guaranteed for 1 year

IR4057-50



IR4059



L4930



L4938



L4935

WIRELESS ADAPTER
Z3210 (Option)Attach to enable
Bluetooth®
wireless technology

With Z3210

Please see www.hioki.com
for list of supported regions.

5 ranges

Comparator decision response time : 0.3 s

Digital bar graph

CAT III 600 V

Included accessories

- CONNECTION CABLE L4930
- ALLIGATOR CLIP SET L4935
- TEST PIN SET L4938
- TEST LEAD SET WITH REMOTE SWITCH (RED) L9788-10 (IR4059 only)
- PROTECTOR Z5042 (IR4059 only)
- Neck strap
- LR6 alkaline battery x4
- Instruction manual



INSULATION TESTER (For Photovoltaic Generation Systems) IR4053-10

Product warranty for 3 years
Accuracy guaranteed for 1 year

Included accessories

- TEST LEAD L9787
- Neck strap
- LR6 alkaline battery x4
- Instruction manual

IR4053-10



5 ranges

Comparator decision response time : 0.8 s

Comparator decision response time (PV) : 4 s

CAT III 600 V

Model	IR4056-20	IR4056-21	IR4057-50	IR4059	IR4053							Basic accuracy
Measurement parameters	Insulation resistance	✓	✓	✓	✓	Testing voltage (DC)	50 V	125 V	250 V	500 V	1000 V	-
						Effective maximum indicated value (MΩ)	100	250	500	2000	4000	-
						1st effective measuring range (MΩ)	0.200 to 10.00	0.200 to 25.0	0.200 to 50.0	0.200 to 500	0.200 to 1000	±2% rdg ±2 dgt
	PV Ω measurement	N / A	N / A	✓	✓	2nd effective measuring range (MΩ)	10.1 to 100.0	25.1 to 250	50.1 to 500	501 to 2000	1010 to 4000	±5% rdg
						Testing voltage (DC)	500 V	1000 V	1000 V	1000 V	1000 V	-
						Effective maximum indicated value (MΩ)	2000	4000	4000	4000	4000	-
Other	DC Voltage	N / A	✓	N / A	✓	1st effective measuring range (MΩ)	0.200 to 500	0.200 to 1000	0.200 to 1000	0.200 to 1000	0.200 to 1000	±4% rdg
						2nd effective measuring range (MΩ)	501 to 2000	1010 to 4000	1010 to 4000	1010 to 4000	1010 to 4000	±8% rdg
						4.200 V/42.00 V/420.0 V/1000 V	4.200 V/42.00 V/420.0 V/600 V	4.200 V/42.00 V/420.0 V/600 V	4.200 V/42.00 V/420.0 V/600 V	4.200 V/42.00 V/420.0 V/600 V	4.200 V/42.00 V/420.0 V/600 V	±1.3% rdg ±4 dgt ^{*1}
	AC Voltage	✓	✓	N / A	✓	420.0 V ^{*2} /600 V	420.0 V ^{*2} /600 V	420.0 V ^{*2} /600 V	420.0 V ^{*2} /600 V	420.0 V ^{*2} /600 V	420.0 V ^{*2} /600 V	±1.3% rdg ±4 dgt ^{*1}
						420.0 V ^{*2} /600 V	420.0 V ^{*2} /600 V	420.0 V ^{*2} /600 V	420.0 V ^{*2} /600 V	420.0 V ^{*2} /600 V	420.0 V ^{*2} /600 V	±2.3% rdg ±8 dgt ^{*1}
Other	Low resistance measurement	✓	N / A	N / A	N / A	10.00 Ω/100.0 Ω/1000 Ω	10.00 Ω/100.0 Ω/1000 Ω	10.00 Ω/100.0 Ω/1000 Ω	10.00 Ω/100.0 Ω/1000 Ω	10.00 Ω/100.0 Ω/1000 Ω	10.00 Ω/100.0 Ω/1000 Ω	±3% rdg ±2 dgt

Operating temperature IR4056-20, IR4056-21, IR4057-50, IR4059: -25°C to 65°C, 90% RH or less (non-condensating)
IR4053: 0°C to 50°C, 90% RH or less (non-condensating)

Storage temperature IR4056-20, IR4056-21, IR4057-50, IR4059: -25°C to 65°C, 90% RH or less (non-condensating)
IR4053: -10 °C to 50°C, 90% RH or less (non-condensating)

Dustproof and waterproof IP40 (Terminal excluded)

Standards EN61326 (EMC), EN61557-1/-2/-4³-10

Power supply LR6 alkaline battery x4

Continuous operating time 20 hours

Dimensions (W × H × D) IR4056-20, IR4056-21, IR4057-50, IR4059: 159 × 177 × 53 mm (6.26 × 6.97 × 2.09 inch)

IR4053: 160 × 98 × 46 mm (6.30 × 3.86 × 1.81 inch)

Weight IR4056-20, IR4056-21, IR4057-50, IR4059: 600 g (21.2 oz)

IR4053: 536 (18.9 oz)

IR4057-50: 640 g (22.6 oz)

Order code **IR4056-20**Order code **IR4056-21**Order code **IR4057-50**Order code **IR4057-90**Order code **IR4059**Order code **IR4053-10**Order code **Z3210**Model IR4057-90
includes Z3210 as a set

^{*1} Ranges in excess of 600 V/1000 V are outside the accuracy guarantee

^{*2} Minimum indicated value: 30.0 V

^{*3} Subclause 4.3 of Part 4 (interchanging of test leads) is not applicable when L9788-10 is used



HIGH VOLTAGE INSULATION TESTER IR3455

Product warranty for 3 years
Accuracy guaranteed for 1 year



5 ranges

Bar graph

CAT IV 600 V, CAT III 1000 V

Order code **IR3455**

Included accessories



9750, 9751

- TEST LEAD 9750 -01 (Red), -02 (Black), -03 (Blue) (3m) (x1 ea.)
- ALLIGATOR CLIP 9751 -01 (Red), -02 (Black), -03 (Blue) (x1 ea.)
- Instruction manual
- LR6 alkaline battery x6
- USB cable
- CD-R (Data Analysis Software)


*1 Up to [Test voltage (setting value)/Resistance measurable at 100 nA]
*2 While in storage *3 Options

Measurement parameters	Testing voltage (DC) : measuring range	250 V 0.00 MΩ to 500 GΩ 500 V 0.00 MΩ to 1.00 TΩ 1 kV 0.00 MΩ to 2.00 TΩ 2.5 kV 0.00 MΩ to 5.00 TΩ 5 kV 0.00 MΩ to 10.0 TΩ
	Measurement current	1 mA (Test voltage 250 V to 1.00 kV) 0.5 mA (Test voltage 1.10 kV to 2.50 kV) 0.25 mA (Test voltage 2.60 kV to 5.00 kV)
	Short-circuit current	2 mA or less
	Accuracy	±5% rdg ±5 dgt.*1
	Leakage current	10 nA/100 nA/1000 nA/10 μA/100 μA/1 mA Guaranteed accuracy range: 1.00 nA to 1.20 mA Basic accuracy: ±2.5% rdg ±5 dgt.
Other	DC Voltage	±50 V to ±1.00 kV Basic accuracy: ±5% rdg ±5 dgt
	AC Voltage	50 V to 750 V Basic accuracy: ±5% rdg ±5 dgt
	Temperature	-10.0°C to 70.0°C Basic accuracy: ±1.0°C
	Operating temperature	-10°C to 40°C, 80% RH or less (non-condensating)
	Storage temperature	-10°C to 50°C, 90% RH or less (non-condensating)
Other	Dustproof and waterproof	IP40*2
	Standards	EN61010 (safety), EN61326 (EMC)
	Power supply	LR6 (AA) alkaline battery x6: 5 hours BATTERY PACK 9459*3: 9 hours AC ADAPTER 9418-15*3
	Continuous operating time	
	Dimensions (W × H × D)	260 × 250.6 × 119.5 mm (10.24 × 9.87 × 4.70 in)
	Weight	2.8 kg (98.8 oz)


Options

IR4016-20, IR4017-20, IR4018-20, IR4056-20, IR4056-21, IR4057-50, IR4057-90, IR4053-10, IR4059, 3490

- 1 TEST LEAD SET WITH REMOTE SWITCH L9788-11
- 2 TEST LEAD WITH REMOTE SWITCH (RED) L9788-10
- 3 TIP PIN L9788-90
- 4 BREAKER PIN L9788-92
- 5 MAGNETIC ADAPTER 9804-01
- 6 MAGNETIC ADAPTER 9804-02
- 7 TEST LEAD L9787
- 8 CONNECTION CABLE SET L4930
- 9 ALLIGATOR CLIP SET L4935
- 10 TEST PIN SET L4938
- 11 BREAKER PIN L9787-91
- 12 WIRELESS ADAPTER Z3210 (For IR4057-50, IR4059)
- 13 PROTECTOR Z5042 (For IR4059)
- 14 CARRYING CASE C0213 (EV MAINTENANCE MANUAL INCLUDED)

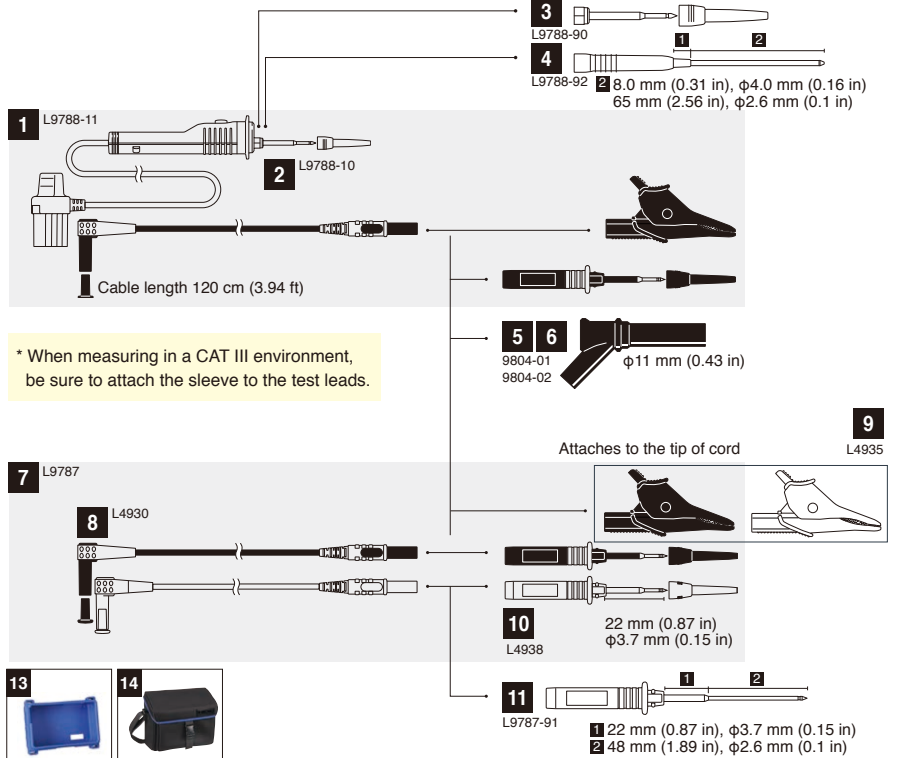

IR3455		
1	TEST LEAD 9750 -01	RED, 3 m (9.84 ft)
2	TEST LEAD 9750 -02	BLACK, 3 m (9.84 ft)
3	TEST LEAD 9750 -03	BLUE, 3 m (9.84 ft)
4	TEST LEAD 9750 -11	RED, 10 m (32.81 ft)
5	TEST LEAD 9750 -12	BLACK, 10 m (32.81 ft)
6	TEST LEAD 9750 -13	BLUE, 10 m (32.81 ft)
7	ALLIGATOR CLIP 9751 -01	RED
8	ALLIGATOR CLIP 9751 -02	BLACK
9	ALLIGATOR CLIP 9751 -03	BLUE
10	TEMPERATURE SENSOR 9631-01	Molded plastic thermistor type (1 m (3.28 ft))
11	TEMPERATURE SENSOR 9631-05	Molded plastic thermistor type (5 cm (0.16 ft))
12	AC ADAPTER 9418-15	
13	BATTERY PACK 9459	

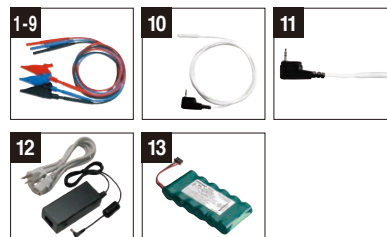




DMM TESTERS

Safely inspects and easily manages measurement data for high-voltage solar power generation

High voltage measurement up to
CAT III 2000 V by connecting "P2000"

Supports wireless communication to
increase work efficiency

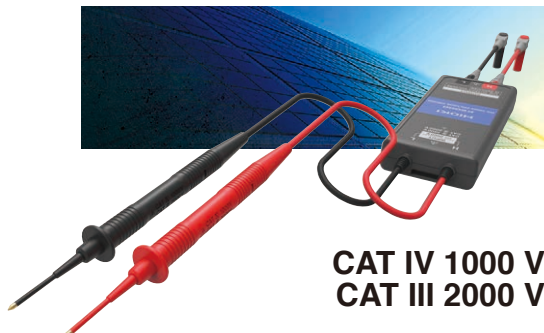

CAT IV 1000 V
CAT III 2000 V



DC HIGH VOLTAGE PROBE P2000 (Options)



Cooperation with GENNECT Cross




WIRELESS ADAPTER Z3210 (Options)



DT4261

Designed and manufactured in Japan

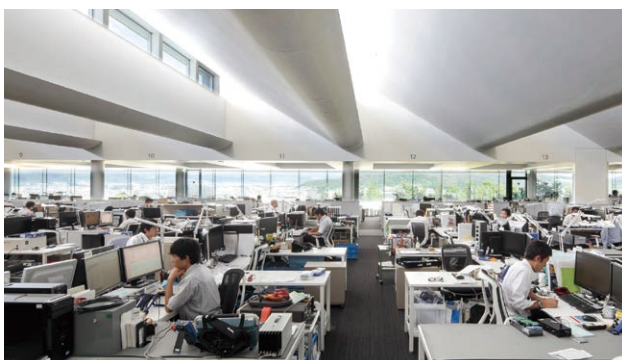

Development, design, and manufacturing processes for almost all Hioki digital multimeters are carried out at our headquarters in Nagano Prefecture.

Withstand a 1-meter drop onto a concrete floor




Products are dropped repeatedly until they are damaged in order to validate their impact performance. Test results are used to make design improvements and enhance durability.

Accurately measure the voltage of the secondary side of inverters



Non-distorted current waveforms



Voltage waveforms with harmonic components




The secondary side of inverters include harmonic components. Waveforms containing harmonics are distorted and difficult to measure with accuracy. By using a low-pass filter to remove harmonic components, accurate measurement values can be obtained.


True RMS measurement correctly captures distorted current waveforms



Non-distorted current waveforms










Distorted waveforms due to switching power supplies










A measuring instrument uses one of two rectification methods, "True RMS" or "Mean". Using mean rectification assumes that the signal is based on a sine wave without distortions in order to calculate the value. Distorted waveforms cannot be measured accurately using this method.

Lineup

Measurement type	Electrical work	General use	Solar power/ General use	General use	Air conditioning/ instrumentation	Electrical work	General use
Model	High-end models		New standard model	Standard models			
	DT4281	DT4282	DT4261	DT4252	DT4253	DT4255	DT4256
Appearance							
AC measurement system	True RMS	True RMS	True RMS	True RMS	True RMS	True RMS	True RMS
Display counts	60000	60000	6000	6000	6000	6000	6000
DCV typical accuracy	±0.025% rdg ±2 dgt	±0.025% rdg ±2 dgt	±0.15% rdg ±2 dgt	±0.2% rdg ±5 dgt	±0.3% rdg ±5 dgt	±0.3% rdg ±3 dgt	±0.3% rdg ±3 dgt
Frequency characteristics	20 Hz to 100 kHz	20 Hz to 100 kHz	40 Hz to 1 kHz	40 Hz to 1 kHz	40 Hz to 1 kHz	40 Hz to 1 kHz	40 Hz to 1 kHz
Measurement parameters	DC voltage (Resolution)	1000 V (0.001 mV)	1000 V (0.001 mV)	1000 V/2000 V ¹ (0.1 mV)	1000 V (0.1 mV)	1000 V (0.1 mV)	1000 V (0.1 mV)
	AC voltage (Resolution)	1000 V (0.001 mV)	1000 V (0.001 mV)	1000 V (0.001 V)	1000 V (0.001 V)	1000 V (0.001 V)	1000 V (0.001 V)
	DCV + ACV	1000 V	1000 V	1000 V	N / A	N / A	N / A
	DC current (Resolution)	600 mA (0.01 μA)	10 A (0.01 μA)	10 A (0.1 mA)	10 A (0.001 A)	60 mA (0.01 μA)	10 A (0.01 mA)
	AC current (Resolution)	600 mA (0.01 μA)	10 A (0.01 μA)	10 A (0.1 mA)	10 A (0.001 A)	N / A	10 A (0.1 mA)
	AC current (Clamp)	1000 A	N / A	1000 A	N / A	1000 A	1000 A
	Resistance	600 MΩ	600 MΩ	60 MΩ	60 MΩ	60 MΩ	60 MΩ
	Temperature	-40°C to 800°C	-40°C to 800°C	N / A	N / A	-40°C to 400°C	N / A
	Capacitance	100 mF	100 mF	10 mF	10 mF	10 mF	10 mF
	Frequency	500 kHz	500 kHz	99 kHz	99 kHz	99 kHz	99 kHz
	Continuity check	✓	✓	✓	✓	✓	✓
	Diode check	✓	✓	✓	✓	✓	✓
	Conductance	N / A	✓	N / A	N / A	N / A	N / A
Additional functions	Voltage detection	N / A	N / A	N / A	N / A	✓	✓
	AUTO AC/DCV	N / A	N / A	✓	✓	✓	✓
	MAX/MIN/AVG	MAX/MIN	MAX/MIN	✓	✓	✓	✓
	PEAK display	✓	✓	✓	N / A	N / A	N / A
	Relative display	✓	✓	N / A	✓	✓	✓
	Decibel conversion	✓	✓	N / A	N / A	N / A	N / A
Display	Percentage conversion display (4-20 mA)	✓	✓	N / A	N / A	✓	N / A
	AUTO range	✓	✓	✓	✓	✓	✓
	Hold display value	AUTO /MANUAL	AUTO /MANUAL	AUTO /MANUAL	AUTO /MANUAL	AUTO /MANUAL	AUTO /MANUAL
	Dual display	✓	✓	✓	✓	✓	✓
	Bar graph display	N / A	N / A	✓	✓	✓	✓
	Backlight	✓	✓	✓	✓	✓	✓
Safety	Internal memory	✓	✓	N / A	N / A	N / A	N / A
	USB communication ²	✓	✓	✓	✓	✓	✓
	Bluetooth® communication	N / A	N / A	✓ (with Z3210)	N / A	N / A	N / A
	Mis-insertion prevention shutters	✓	✓	✓	N / A	N / A	N / A
	Circuit breaker false trip prevention	N / A	N / A	N / A	N / A	N / A	N / A
	Safety standard category	CAT IV 600 V CAT III 1000 V	CAT IV 600 V CAT III 1000 V	CAT IV 600 V CAT III 1000 V	CAT IV 600 V CAT III 1000 V	CAT IV 600 V CAT III 1000 V	CAT IV 600 V CAT III 1000 V
Lux	CE	N / A	N / A	✓	✓	✓	✓
	Dustproof and waterproof	IP40	IP40	IP54*3	IP40 (When operating) IP42 (While in storage) *3 *4	IP40 (When operating) IP42 (While in storage) *3 *4	IP40 (When operating) IP42 (While in storage) *3 *4
	Drop proof	✓	✓	✓	✓	✓	✓
Auto power off	✓	✓	✓	✓	✓	✓	✓
Power supply	LR6 x4 alkaline battery	LR6 x4 alkaline battery	LR6 x3 alkaline battery	LR03 x4 alkaline battery	LR03 x4 alkaline battery	LR03 x4 alkaline battery	LR03 x4 alkaline battery
Dimensions (W × H × D)	93 × 197 × 53 mm 3.66 × 7.76 × 2.09 in	93 × 197 × 53 mm 3.66 × 7.76 × 2.09 in	87 × 185 × 47 mm 3.43 × 7.28 × 1.85 in	84 × 174 × 52 mm 3.31 × 6.85 × 2.05 in	84 × 174 × 52 mm 3.31 × 6.85 × 2.05 in	84 × 174 × 52 mm 3.31 × 6.85 × 2.05 in	84 × 174 × 52 mm 3.31 × 6.85 × 2.05 in
Weight	650 g /22.9 oz	650 g /22.9 oz	480 g /16.9 oz	390 g /13.8 oz	390 g /13.8 oz	390 g /13.8 oz	390 g /13.8 oz

*1: 2000 V is supported only when using the optional DC HIGH VOLTAGE PROBE P2000 *2: Requires optional COMMUNICATION PACKAGE(USB) DT4900-01 *3: Do not use in wet conditions.
*4: Excludes measuring terminals

Measurement type	Electrical work	General use	Electrical work	General use	Electrical work	Electrical work	Electrical work
Model	Pocket models				3030-10	3244-60	3246-60
	DT4221	DT4222	DT4223	DT4224			
Appearance							
AC measurement system	True RMS	True RMS	True RMS	True RMS	N / A	MEAN Value	MEAN Value
Display count	6000	6000	6000	6000	N / A	4199	4199
DCV typical accuracy	±0.5% rdg ±5 dgt	±0.5% rdg ±5 dgt	±0.5% rdg ±5 dgt	±0.5% rdg ±5 dgt	f.s. reading ±2.5%	±0.7% rdg ±4 dgt	±1.3% rdg ±4 dgt
Frequency characteristics	40 Hz to 1 kHz	40 Hz to 1 kHz	40 Hz to 1 kHz	40 Hz to 1 kHz	N / A	50 Hz to 500 Hz	50 Hz to 500 Hz
Measurement parameters	DC voltage (Resolution)	600 V (0.1 mV)	600 V (0.1 mV)	600 V (0.1 mV)	600 V	500 V (0.1 mV)	600 V
	AC voltage (Resolution)	600 V (0.001 V)	600 V (0.001 V)	600 V (0.001 V)	600 V	500 V (0.001 V)	600 V
	DCV + ACV	N / A	N / A	N / A	N / A	N / A	N / A
	DC current (Resolution)	N / A	N / A	N / A	300 mA	N / A	N / A
	AC current (Resolution)	N / A	N / A	N / A	N / A	N / A	N / A
	AC current (Clamp)	N / A	N / A	N / A	N / A	N / A	N / A
	Resistance	60 MΩ	60 MΩ	60 MΩ	3 kΩ	42 MΩ	42 MΩ
	Temperature	N / A	N / A	N / A	150°C	N / A	N / A
	Capacitance	N / A	10 mF	N / A	10 mF	N / A	N / A
	Frequency	9.9 kHz	9.9 kHz	9.9 kHz	9.9 kHz	N / A	N / A
	Continuity check	✓	✓	✓	✓	✓	✓
	Diode check	N / A	✓	N / A	✓	N / A	✓
Additional functions	Conductance	N / A	N / A	N / A	N / A	N / A	N / A
	Voltage detection	✓	N / A	✓	N / A	N / A	N / A
	AUTO AC/DCV	✓	N / A	✓	N / A	N / A	N / A
	MAX/MIN/AVG	N / A	N / A	N / A	N / A	N / A	N / A
	PEAK display	N / A	N / A	N / A	N / A	N / A	N / A
	Relative display	✓	✓	✓	✓	N / A	N / A
Display	Decibel conversion	N / A	N / A	N / A	N / A	N / A	N / A
	Percentage conversion display (4-20 mA)	✓	N / A	N / A	N / A	N / A	N / A
	AUTO range	✓	✓	✓	✓	✓	✓
	Hold display value	MANUAL	MANUAL	AUTO /MANUAL	AUTO /MANUAL	N / A	✓
	Dual display	N / A	N / A	N / A	N / A	N / A	N / A
	Bar graph display	✓	✓	✓	✓	N / A	N / A
Safety	Backlight	✓	✓	✓	✓	N / A	✓
	Internal memory	N / A	N / A	N / A	N / A	N / A	N / A
	USB communication ²	N / A	N / A	N / A	N / A	N / A	N / A
	Bluetooth [®] communication	N / A	N / A	N / A	N / A	N / A	N / A
	Mis-insertion prevention shutters	N / A	N / A	N / A	N / A	N / A	N / A
	Circuit breaker false trip prevention	N / A	N / A	✓	✓	N / A	N / A
Safety	Safety standard category	CAT IV 300 V CAT III 600 V	CAT IV 300 V CAT III 600 V	CAT IV 300 V CAT III 600 V	CAT IV 300 V CAT III 600 V	CAT III 600 V	CAT IV 300 V CAT III 600 V
	CE	✓	✓	✓	✓	N / A	N / A
	Dustproof and waterproof	IP40 (When operating) IP42 (While in storage) *3 *4	IP40 (When operating) IP42 (While in storage) *3 *4	IP40 (When operating) IP42 (While in storage) *3 *4	IP40 (When operating) IP42 (While in storage) *3 *4	N / A	N / A
	Drop proof	✓	✓	✓	✓	✓	N / A
Auto power off	✓	✓	✓	✓	N / A	✓	✓
Power supply	LR03 × 1 alkaline battery	LR03 × 1 alkaline battery	LR03 × 1 alkaline battery	LR03 × 1 alkaline battery	R6P × 2 manganese battery	CR2032 × 1 coin type battery	CR2032 × 1 coin type battery
Dimensions (W × H × D)	72 × 149 × 38 mm 2.83 × 5.87 × 1.50 in	72 × 149 × 38 mm 2.83 × 5.87 × 1.50 in	72 × 149 × 38 mm 2.83 × 5.87 × 1.50 in	72 × 149 × 38 mm 2.83 × 5.87 × 1.50 in	95 × 141 × 39 mm 3.74 × 5.55 × 1.54 in	55 × 109 × 9.5 mm 2.17 × 4.29 × 0.37 in	30 × 182 × 26.5 mm 1.18 × 7.17 × 1.04 in
Weight	190 g /6.7 oz	190 g /6.7 oz	190 g /6.7 oz	190 g /6.7 oz	280 g /9.9 oz	60 g /2.1 oz	80 g /2.8 oz

Product warranty for 3 years
Accuracy guaranteed for 1 year

DIGITAL MULTIMETER DT4281, DT4282



DT4281

DT4282

Electrical work



General use



High-end models

60000 Counts

DCV typical accuracy: $\pm 0.025\%$ rdg ± 2 dgt

CAT IV 600 V / CAT III 1000 V

Premium DMMs Deliver
High Precision and
Full Array of Features

extensive additional functionality

It is equipped with additional functions for more advanced measurements. It has a PEAK value display, useful for measuring ripple voltage in DC power supply systems, and a 4-20 mA/0-20 mA conversion display, useful for measuring instrumentation signals.

- Display of maximum/ minimum values
- Display of PEAK value
- Relative display
- Percent conversion 4-20mA

Product warranty for 3 years
Accuracy guaranteed for 1 year



DIGITAL MULTIMETER DT4261



DT4261

General use



New standard model

6000 Counts


DCV typical accuracy: $\pm 0.15\%$ rdg ± 2 dgt

CAT IV 600 V / CAT III 1000 V

With P2000 CAT IV 1000 V / CAT III 2000 V

Safely inspects for high-voltage
solar power generation

Safety and Convenience



measurable up to
CAT III 2000 V.

DC HIGH VOLTAGE PROBE P2000 (Options)



Bluetooth®
communication is
available

WIRELESS ADAPTER Z3210 (Options)



DIGITAL MULTIMETER DT4252, DT4253, DT4255, DT4256


Product warranty for 3 years
Accuracy guaranteed for 1 year



DT4252



DT4253



DT4255



DT4256



Standard models

6000 Counts

DCV typical accuracy: $\pm 0.3\%$ rdg ± 5 dgt

CAT IV 600 V / CAT III 1000 V

Choose from 4 Models to Fit Your Application

Equipped with specialized functions
catering to your needs

Air conditioning/ instrumentation

- Measure low currents with 60 μ A range
- Test temperature
- 4 to 20 mA % display

Electrical work

- Prevent short-circuit accidents with a fast-blow fuse and current-limiting resistor



DIGITAL MULTIMETER DT4221, DT4222, DT4223, DT4224

Product warranty for 3 years
Accuracy guaranteed for 1 year



DT4221



DT4222



DT4223



DT4224



Pocket models

6000 Counts

DCV typical accuracy: $\pm 0.5\%$ rdg ± 5 dgt

CAT IV 300 V / CAT III 600 V

Compact and Convenient

Circuit breaker false trip prevention
(DT4223, DT4224 Only)



Eliminate accidents such as tripped earth leakage breakers or flash arcs even when mistakenly inputting voltage while in resistance measurement mode



Model	DT4281	DT4282	Basic accuracy	Basic accuracy
DC voltage	✓	✓	60.000 mV/600.00 mV/6.0000 V/60.000 V/600.00 V/1000.0 V	±0.025% rdg ±2 dgt
AC voltage	✓	✓	60.000 mV/600.00 mV/6.0000 V/60.000 V/600.00 V/1000.0 V	±0.2% rdg ±25 dgt
DCV + ACV	✓	✓	6.0000 V/60.000 V/600.00 V/1000.0 V	±0.3% rdg ±30 dgt
DC current	✓	N/A	600.00 μA/6000.0 μA/60.000 mA/600.0 mA	±0.05% rdg ±5 dgt
AC current	N/A	✓	600.00 μA/6000.0 μA/60.000 mA/600.0 mA/6.0000 A/10.000 A	±0.05% rdg ±5 dgt
AC current (Clamp)	✓	N/A	600.00 μA/6000.0 μA/60.000 mA/600.0 mA	±0.6% rdg ±5 dgt
Resistance	✓	✓	600.00 μA/6000.0 μA/60.000 mA/600.0 mA/6.0000 A/10.000 A	±0.6% rdg ±2 dgt
Temperature	✓	✓	10.00 A/20.00 A/50.00 A/100.0 A/200.0 A/500.0 A/1000 A	±0.03% rdg ±2 dgt
Capacitance	✓	✓	60.000 Ω/600.00 Ω/6.0000 kΩ/60.000 kΩ/600.00 kΩ/6.0000 MΩ/60.00 MΩ/600.0 MΩ	±0.5% rdg ±3°C
Frequency	✓	✓	1.000 nF/10.00 nF/100.0 nF/1.000 μF/10.00 μF/100.0 μF/1.000 mF/10.00 mF/100.0 mF	±1% rdg ±5 dgt
Continuity check	✓	✓	99.999 Hz/999.99 Hz/9.9999 kHz/99.999 kHz/500.00 kHz	±0.005% rdg ±3 dgt
Diode check	✓	✓	(Short detection) 20 Ω/50 Ω/100 Ω/500 Ω or less, (Open detection) 220 Ω/ 250 Ω/ 300 Ω/ 600 Ω or more	-
Conductance	N/A	✓	0.15 V/ 0.5 V/ 1 V/ 1.5 V/ 2 V/ 2.5 V/ 3 V (continuous buzzer sound, flashing red light)	-

Operating temperature	-15°C to 55°C (non-condensating)
Storage temperature	-30°C to 60°C (non-condensating)
Dustproof and waterproof	IP40
Standards	EN61010 (Safety), EN61326 (EMC)
Power supply	LR6 alkaline battery x4
Continuous operating time	100 hours (backlight OFF)
Dimensions (W × H × D)	93 × 197 × 53 mm (3.66 × 7.76 × 2.09 in)
Weight	650 g (22.9 oz)

Included accessories

- LR6 alkaline battery × 4
- Instruction manual

Order code **DT4281**Order code **DT4282**

L9207-10



Model	DT4252	DT4253	DT4255	DT4256	DT4261	Basic accuracy
DC voltage	N/A	✓	✓	✓	N/A	600.0 mV/6.000 V/60.00 V/600.0 V/1000 V
AC voltage	✓	N/A	N/A	N/A	N/A	600.0 mV/6.000 V/60.00 V/600.0V/1000 V
DCV + ACV	N/A	N/A	N/A	N/A	✓	600.0 mV/6.000 V/60.00 V/600.0 V/1000 V/2000 V ²
DC current	N/A	✓	✓	✓	✓	6.000 V/60.00 V/600.0 V/1000 V
AC current	N/A	N/A	N/A	N/A	✓	6.000 V/60.00 V/600.0 V/1000 V
AC current (Clamp)	N/A	✓	✓	✓	✓	60.00 μA/600.0 μA/6.000 mA/60.00 mA
Resistance	✓	✓	✓	✓	✓	60.00 mA/600.0 mA/6.000 A/10.00 A
Temperature	N/A	✓	✓	✓	✓	600.0 mA/6.000 A/10.00 A
Capacitance	✓	✓	✓	✓	✓	6.000 A/10.00 A
Frequency	✓	✓	✓	✓	✓	10.00 A/20.00 A/50.00 A/100.0 A/200.0 A/500.0 A/1000 A
Continuity check	✓	✓	✓	✓	✓	600.0 Ω/6.000 kΩ/60.00 kΩ/600.0 kΩ/6.000 MΩ/60.00 MΩ
Diode check	✓	✓	✓	✓	✓	-40.0°C to 400.0°C
Voltage detection	N/A	N/A	✓	✓	N/A	1.000 μF/10.00 μF/100.0 μF/1.000 mF/10.00 mF

Operating temperature	DT4255, DT4256, DT4261: -25°C to 65°C (non-condensating) DT4252, DT4253: -10°C to 50°C (non-condensating)
Storage temperature	DT4255, DT4256, DT4261: -30°C to 70°C (non-condensating) DT4252, 53: -30°C to 60°C (non-condensating)DT42
Dustproof and waterproof	DT4252, DT4253, DT4255, DT4256: IP40 (When operating) IP42 (While in storage) ^{*3*4} DT4261: IP54 ^{*3}
Standards	EN61010 (Safety), EN61326 (EMC)
Power supply	DT4252, DT4253, DT4255, DT4256: LR03 alkaline battery × 4
Continuous operating time	DT4261: LR6 alkaline battery × 3 130 hours (backlight OFF)
Dimensions (W × H × D)	DT4252, DT4253, DT4255, DT4256: 84 × 174 × 52 mm (3.31 × 6.85 × 2.05 in) DT4261: 87 × 185 × 47 mm (3.43 × 7.28 × 1.85 in)
Weight	DT4252, DT4253, DT4255, DT4256: 390 g (13.8 oz) DT4261: 480 g (16.9 oz)

Included accessories

- Included with DT4252, DT4253, DT4255, DT4256**
- L9207-10
 - alkaline battery (LR03) × 4
 - Instruction manual

Order code **DT4252**Order code **DT4253**Order code **DT4255**Order code **DT4256**

L9207-10



L9300

- Included with DT4261**
- L9300
 - alkaline battery (LR6) × 3
 - Instruction manual

Order code **DT4261**Order code **DT4261-90**Order code **Z3210**

Model DT4261-90 includes Z3210 as a set

*1: DT4261 Only *2: Only when using the optional DC HIGH VOLTAGE PROBE P2000
 *3: Do not use in wet conditions *4: Excludes measuring terminals




Model	DT4221	DT4222	DT4223	DT4224	Basic accuracy
DC voltage	✓	✓	✓	✓	600.0 mV/6.000 V/60.00 V/600.0 V
AC voltage	✓	✓	✓	✓	6.000 V/60.00 V/600.0 V
Resistance	N/A	✓	✓	✓	600.0 Ω/6.000 kΩ/60.00 kΩ/600.0 kΩ/6.000 MΩ/60.00 MΩ
Capacitance	N/A	✓	N/A	✓	1.000 μF/10.00 μF/100.0 μF/1.000 mF/10.00 mF
Frequency	✓	✓	✓	✓	99.99 Hz/999.9 Hz/9.999 kHz
Continuity check	✓	✓	✓	✓	(Short detection) 25 Ω or less, (Open detection) 245 Ω or more
Diode check	N/A	✓	N/A	✓	0.15 V to 1.5 V (continuous buzzer sound, flashing red light)
Voltage detection	✓	N/A	✓	N/A	(Detection voltage range) 80 V AC to 600 V AC, (Detection frequency range) 50 Hz/60 Hz

Operating temperature	DT4221, DT4222: -10°C to 50°C (non-condensating) DT4223, DT4224: -10°C to 65°C (non-condensating)
Storage temperature	DT4221, DT4222: -30°C to 60°C (non-condensating) DT4223, DT4224: -30°C to 70°C (non-condensating)
Dustproof and waterproof	IP40 (When operating), IP42 (While in storage) *1 *2
Standards	EN61010 (Safety), EN61326 (EMC)
Power supply	LR03 alkaline battery × 1
Continuous operating time	40 hours (backlight OFF)
Dimensions (W × H × D)	72 × 149 × 38 mm (2.83 × 5.87 × 1.50 in)
Weight	190 g (6.7 oz)

Included accessories

- LR03 alkaline battery × 1
- Instruction manual

Order code **DT4221**Order code **DT4222**Order code **DT4223**Order code **DT4224**

DT4911

*1: Do not use in wet conditions *2: Excludes measuring terminals

Clamp

Insulation

DMMS

Detectors

Earth

Power
quality

Power
consumption

Battery

PV

Logger

LAN

Signal

Lux

Temperature

HiTESTER 3030-10

Product warranty for 3 years
Accuracy guaranteed for 1 year



CAT III 600 V

CARRYING CASE 9390




Included accessories



- TEST LEAD L9207-30
- CARRYING CASE 9390
- R6P manganese battery x2
- Spare fuse
- Instruction manual

L9207-30

Order code **3030-10**



Measurement parameters	DC Voltage	0.3 V/3 V/12 V/30 V/120 V/300 V/600 V Accuracy: $\pm 2.5\%$ of f.s. reading
	AC Voltage	12 V/ 30 V/120 V/300 V/600 V Accuracy: $\pm 2.5\%$ of f.s. reading, (12V: $\pm 4\%$)
	DC Current	60 μ A/30 mA/300 mA Accuracy: $\pm 3\%$ of f.s. reading
	Resistance	0 to 3k Ω , R $\times 1$ / R $\times 10$ / R $\times 100$ / R $\times 1k$ Accuracy : $\pm 3\%$ of scale length
	Battery check	0.9 to 1.8 V Accuracy : $\pm 6\%$ of f.s. reading
Other	Operating temperature	0°C to 40°C (non-condensating)
	Storage temperature	-10°C to 50°C (non-condensating)
	Power supply	R6P manganese battery x2
	Dimensions (W x H x D)	95 x 141 x 39 mm (3.74 x 5.55 x 1.54 in)
	Weight	280 g (9.9 oz)

CARD HiTESTER 3244-60

Product warranty for 3 years
Accuracy guaranteed for 1 year



Cord length
46cm (1.51 ft)

CAT III 300V, CAT II 600V

CARRYING CASE
C0204



Included accessories

- CARRYING CASE C0204
- Sleeves (Red, Black @ 1 each)
- CR2032 coin type battery x1
- Instruction manual

Order code **3244-60**



Measurement parameters	DC Voltage	420.0 mV/ 4.200 V/ 42.00 V/ 420.0 V/ 500 V Accuracy: $\pm 0.7\%$ rdg ± 4 dgt.
	AC Voltage	4.200 V/ 42.00 V/ 420.0 V/ 500 V Accuracy: $\pm 2.3\%$ rdg ± 8 dgt.
	Resistance	420.0 Ω / 4.200 k Ω / 42.00 k Ω / 420.0 k Ω / 4.200 M Ω / 42.00 M Ω Accuracy: $\pm 2.0\%$ rdg ± 4 dgt.
	Continuity check	Detection level: 50 Ω ± 40 Ω or less
	Operating temperature	0°C to 40°C (non-condensating)
Other	Storage temperature	-20°C to 60°C (non-condensating)
	Power supply	CR2032 coin type battery x1
	Dimensions (W x H x D)	55 x 109 x 9.5 mm (2.17 x 4.29 x 0.37 in)
	Weight	60 g (2.1 oz)

PENCIL HiTESTER 3246-60

Product warranty for 3 years
Accuracy guaranteed for 1 year



Cord length
80 cm (2.62 ft)

CAT IV 300 V, CAT III 600 V

Test lead fits neatly
into back of instrument

Included accessories


- Sleeves (Red, Black @ 1 each)
- CR2032 coin type battery x1
- Instruction manual

Order code **3246-60**



Measurement parameters	DC Voltage	420.0 mV/4.200 V/42.00 V/420.0 V/600 V Accuracy: $\pm 1.3\%$ rdg ± 4 dgt.
	AC Voltage	4.200 V/42.00 V/420.0 V/600 V Accuracy: $\pm 2.3\%$ rdg ± 8 dgt.
	Resistance	420.0 Ω /4.200 k Ω /42.00 k Ω /420.0 k Ω /4.200 M Ω /42.00 M Ω Accuracy: $\pm 2.0\%$ rdg ± 4 dgt.
	Continuity check	Detection level: 50 Ω ± 40 Ω or less
	Diode check	Judges the right direction only, Open terminal voltage 3.4 V or less
Other	Operating temperature	0°C to 40°C (non-condensating)
	Storage temperature	-20°C to 60°C (non-condensating)
	Power supply	CR2032 coin type battery x1
	Dimensions (W x H x D)	30 x 182 x 26.5 mm (1.18 x 7.17 x 1.04 in)
	Weight	80 g (2.8 oz)

Options

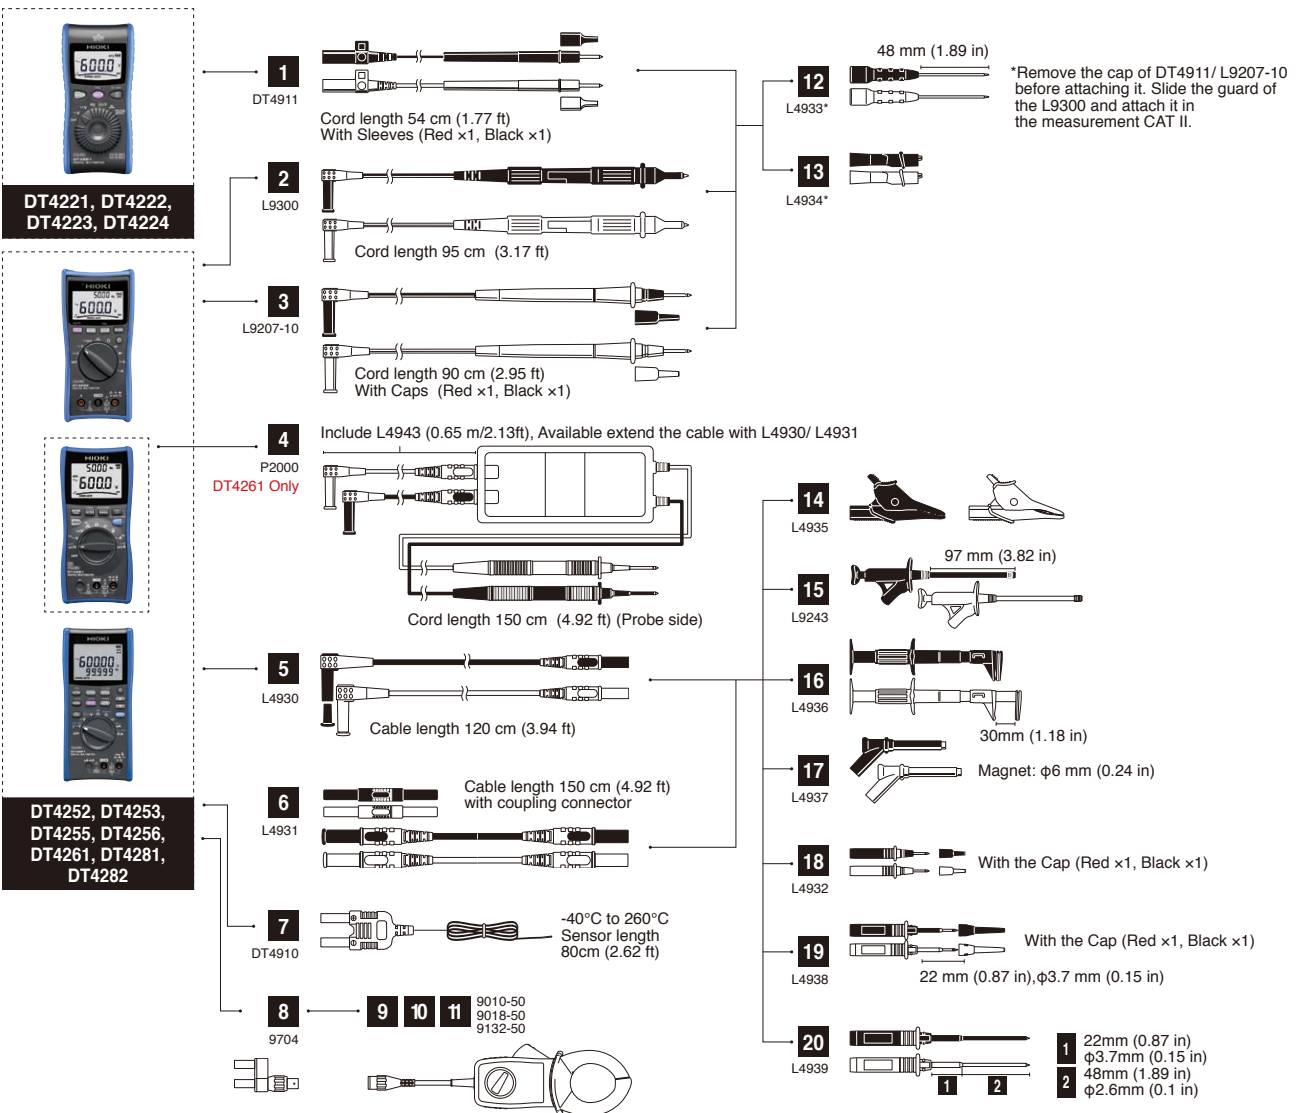

DT4221, DT4222, DT4223, DT4224, DT4252, DT4253, DT4255, DT4256, DT4261, DT4281, DT4282		
1	TEST LEAD DT4911	
2	TEST LEAD L9300	
3	TEST LEAD L9207-10	
4	DC HIGH VOLTAGE PROBE P2000	For DT4261
5	CONNECTION CABLE L4930	
6	EXTENSION CABLE SET L4931	
7	THERMOCOUPLES (K) DT4910	
8	CONVERSION ADAPTER 9704	
9	AC CLAMP ON PROBE 9010-50 ¹	500 A AC, $\phi 46$ mm, Frequency characteristics: 40 Hz to 1 kHz
10	AC CLAMP ON PROBE 9018-50 ¹	500 A AC, $\phi 46$ mm, Frequency characteristics: 40 Hz to 3 kHz
11	AC CLAMP ON PROBE 9132-50 ¹	1000 A AC, $\phi 55$ mm, Frequency characteristics: 40 Hz to 1 kHz
12	CONTACT PIN SET L4933	
13	SMALL ALLIGATOR CLIP SET L4934	
14	ALLIGATOR CLIP SET L4935	
15	GRABBER CLIP L9243	
16	BUS BAR CLIP SET L4936	
17	MAGNETIC ADAPTER SET L4937	
18	TEST PIN SET L4932	
19	TEST PIN SET L4938	
20	BREAKER PIN L4939	
21	COMMUNICATION PACKAGE (USB) DT4900-01	For DT425x series, DT4261, DT428x series Windows 10
22	MAGNETIC STRAP Z5004	For DT422x series, DT425x series, DT4261
23	MAGNETIC STRAP Z5020	Extra strength
24	CARRYING CASE C0200	For DT422x series
25	CARRYING CASE C0201	For DT425x series
26	CARRYING CASE C0202	For DT425x series, DT4261, DT428x series
27	CARRYING CASE C0207	

¹ Adapter Model 9704 is required to connect AC CLAMP ON PROBES 9010-50, 9018-50 and 9132-50 to the DT4281, DT4253, DT4255, DT4256 or DT4261



Clamp

Insulation

DMMs

Detectors

Earth

Power quality

Power consumption

Battery

PV


Logger

LAN

Signal



Lux

Temperature

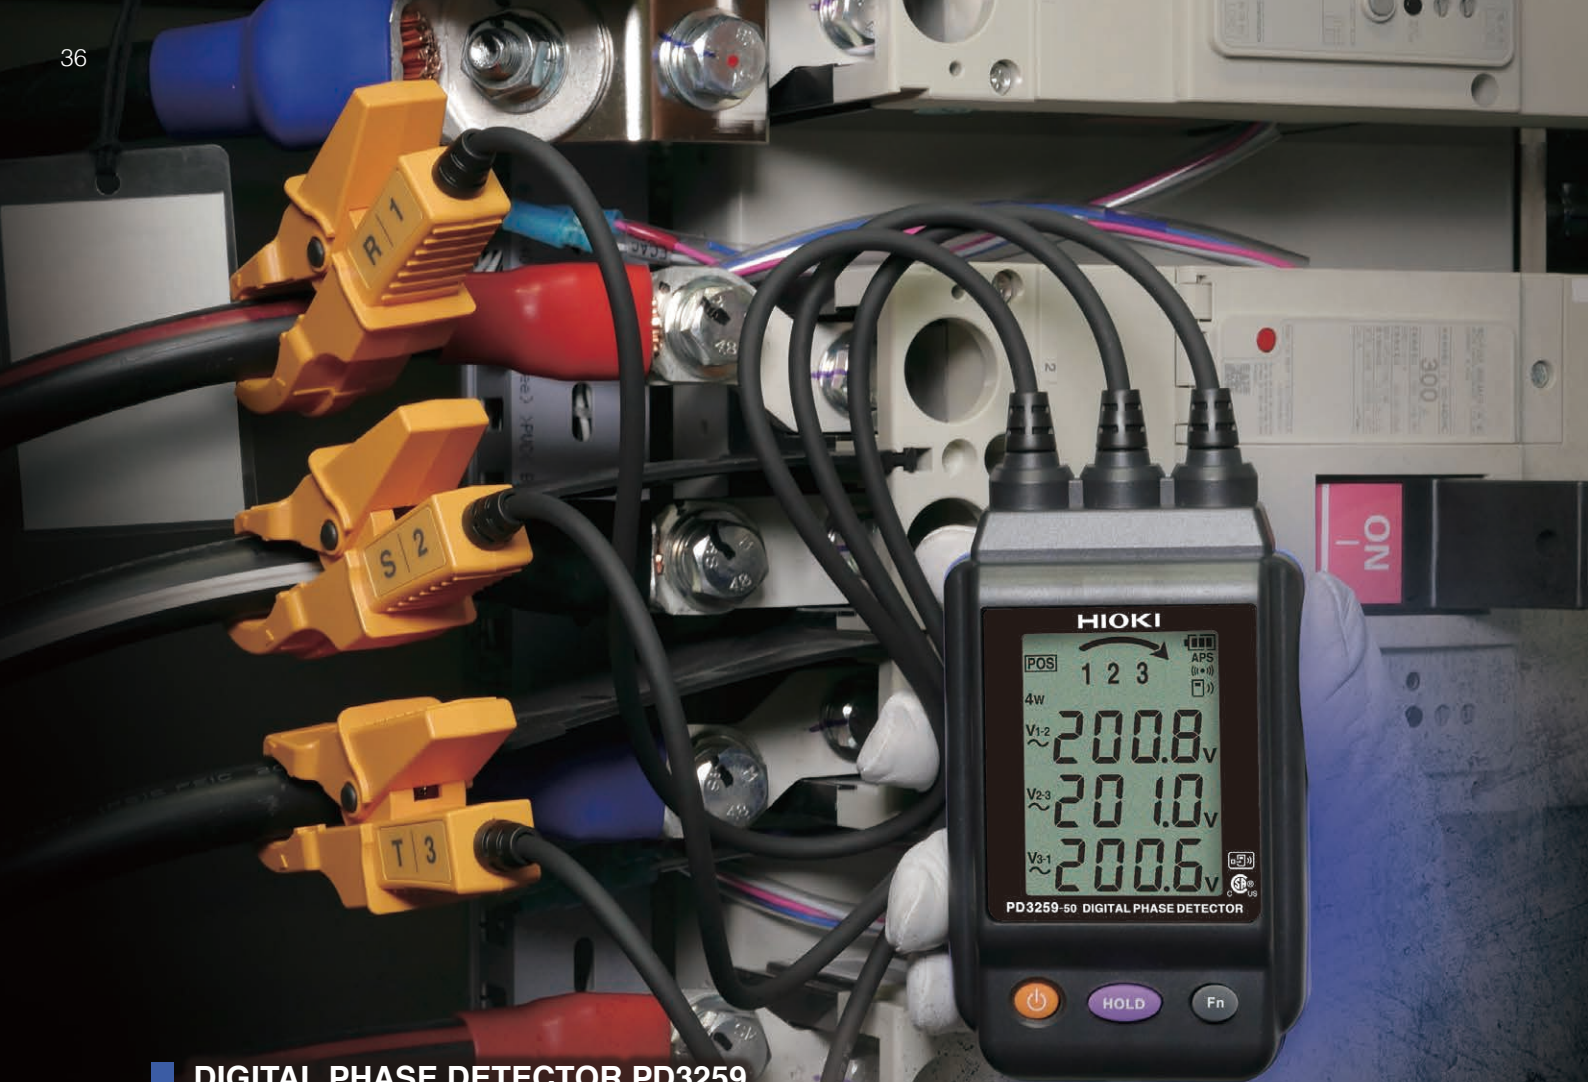


DIGITAL PHASE DETECTOR PD3259

Just clip the probes onto covered cables,
and your 3-phase power line inspection is complete

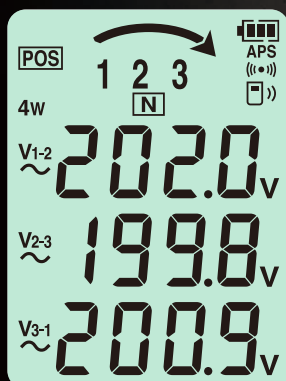

Positive phase sequence
display

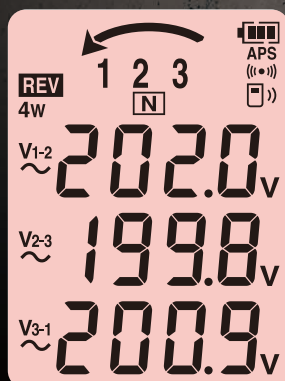

Negative phase sequence
display



Display phase sequence, 3-phase voltage
Use as-is in work certification photos

PHASE DETECTORS VOLTAGE DETECTORS

DIGITAL PHASE DETECTOR PD3259-50



Product warranty for 3 years
Accuracy guaranteed for 1 year



Without metal contact

Hands free Z5020 (Option)

Attach to enable Bluetooth® wireless technology

WIRELESS ADAPTER Z3210 (Option)

With Z3210

Bluetooth

Please see www.hioki.com for list of supported regions.

GENNECT Cross

Model PD3259-90 includes Z3210 as a set

Order code

Order code

Order code

Included accessories

- CARRYING CASE C0203

Dimensions:

W135 mm (5.31 in) × H265 mm (10.43 in) × D65 mm (2.56 in)

- LR6 alkaline battery x4
- Color clips (White x2, red x2, blue x2, yellow x2)
- Spiral tubes (black x1)
- Instruction manual

Options

- MAGNETIC STRAP Z5020

C0203 Color clip Z5020

CAT IV 600 V

Soil, residue, or moisture on the insulated wires may result in lower voltage and power values than their true values. Use a dry cloth to remove before measuring.

Detection functions	Phase detection, open phase, prediction of ground phase (Three-phase line)
Three-phase AC voltage (line-to-line voltage and voltage to ground)	90.0 V to 520.0 V AC (Three-phase line) accuracy: $\pm 2.0\%$ rdg ± 8 dgt
Frequency	45 Hz to 66 Hz Accuracy: $\pm 0.5\%$ rdg ± 1 dgt
Measurement targets	Covered cables, metal portions*1 Finished outer diameter 6 to 30 mm (0.24 to 1.18 in)
Operating temperature	-25°C to 65°C, 80% RH or less (non-condensating)
Storage temperature	-25°C to 65°C, 80% RH or less (non-condensating)
Dustproof and waterproof	IP54 (device body only)
Standards	EN61010 (Safety), EN61326 Class A (EMC)
Power supply	LR6 alkaline battery x4
Continuous operating time	5 hours (Without Z3210)
Dimensions (W × H × D)	84 × 146 × 46 mm (3.31 × 5.75 × 1.81 in) Cable length 50 cm (1.64 ft)
Weight	590 g (20.8 oz)

*1 Shielded cables not supported

PHASE DETECTOR PD3129, PD3129-10



Product warranty for 3 years
Accuracy guaranteed for 1 year



PD3129: Thin Conductors

$\phi 2.4$ mm (0.09 in) to $\phi 17$ mm (0.67 in)

PD3129-10: Thick Conductors

$\phi 7$ mm (0.28 in) to $\phi 40$ mm (1.57 in)

Included accessories

- CARRYING CASE
- Strap
- R6P manganese battery x2
- Spiral tube
- Instruction manual

Order code

Order code

CAT IV 600 V

PD3129 CAT IV 600 V

PD3129-10 CAT IV 600 V, CAT III 1000 V

Detection functions	Phase detection (positive and negative)
Voltage range	PD3129 70 to 600 V AC (continuous sine wave) PD3129-10 70 to 1000 V AC (continuous sine wave)
Frequency range	45 Hz to 66 Hz
Measurement targets	PD3129 2.4 mm (0.09 in) to 17 mm (0.67 in) of insulated wiring PD3129-10 7 mm (0.28 in) to 40 mm (1.57 in) of insulated wiring
Phase-detection indication	Positive 4 LEDs lit in clockwise order and the buzzer sounds intermittently, green arrow lights up Negative 4 LEDs lit in counterclockwise order and the buzzer sounds continuously
Functions	Live line check, Battery check function
Operating temperature	0°C to 40°C, 80% RH or less (non-condensating)
Storage temperature	-20°C to 60°C, 80% RH or less (non-condensating)
Standards	EN61010 (Safety), EN61326 (EMC)
Power supply	R6P manganese battery x 2
Continuous operating time	5 hours
Dimensions (W × H × D)	70 × 75 × 30 mm (2.76 × 2.95 × 1.18 in) Cable length 70 cm (2.30 ft)
Weight	PD3129: 200 g (7.1 oz), PD3129-10: 240 g (8.5 oz)

VOLTAGE DETECTOR 3481-20



Product warranty for 3 years
Accuracy guaranteed for 1 year



with LED light

Red for voltage detection

Included accessories

- LR44 button alkaline battery x3
- Instruction manual

Order code

CAT IV 600 V

Operating voltage range	40 to 600 V AC (50Hz/60Hz)
Maximum sensitivity variable range	40 to 80 V AC (50Hz/60Hz)
Pilot light	Red LED lights up and the buzzer sounds when the wire is live
Operating temperature	0°C to 40°C, 80% RH or less (non-condensating)
Storage temperature	-20°C to 60°C, 80% RH or less (non-condensating)
Standards	EN61010 (Safety), EN61326 (EMC)
Power supply	LR44 button alkaline battery x 3
Continuous operating time	5 hours
Dimensions (W × H × D)	20 × 126 × 15 mm (0.79 × 4.96 × 0.59 in)
Weight	30 g (1.1 oz)




EARTH TESTER FT6031

Remarkable waterproof and dustproof performance
One-touch testing for all 4 ground types


Ground types		
Type	Criterion	Locations used
Class A	10 Ω or less	Special high voltage, high voltage
Class B	As per calculations	Transformer neutral point
Class C	10 Ω or less* 500 Ω or less*	Low voltages in excess of 300 V
Class D	10 Ω or less* 500 Ω or less*	Low voltages of 300 V or less

3
electrode
method
(classes A to D)

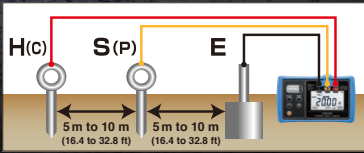

Measurement is performed after inserting an auxiliary grounding rod into the soil. For accurate measurement, position E-S(P)-H(C) in a straight line at an interval of about 5 to 10 m.

2
electrode
method
(classes D)

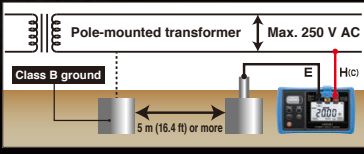

Class D ground installations can be measured by using the Class B ground of a pole-mounted transformer. The measured value will include the resistance value of the Class B ground. The distribution panel's main ground terminal is typically connected to the power supply's ground line.

*With ground-fault interrupter that trips within 0.5 sec.



Sturdy, thin rods drive easier into the ground



Cord winders make cleanup a snap

EARTH TESTERS

EARTH TESTER FT6031-50

Product warranty for 3 years
Accuracy guaranteed for 1 year

2-electrode Class D

3-electrode Class A to D

CAT IV 100 V, CAT III 150 V, CAT II 300 V

WIRELESS ADAPTER Z3210 (Option): Attach to enable Bluetooth® wireless technology

Model FT6031-90 includes Z3210 as a set

With Z3210



Please see www.hioki.com for list of supported regions.

GENNECT
Cross

Z3210

Order code **FT6031-50**Order code **FT6031-90**Order code **Z3210**

Measurement parameters	Measurement system	Two-electrode method (Class D) Three-electrode method (Class A to D)
	Range configuration Accuracy	20 Ω (0 to 20.00 Ω): ±1.5% rdg ±8 dgt 200 Ω (0 to 200.0 Ω): ±1.5% rdg ±4 dgt 2000 Ω (0 to 2000 Ω): ±1.5% rdg ±4 dgt
	Earth potential Accuracy	0 to 30.0 Vrms 50/60 Hz: ±2.3% rdg ±8 dgt DC: ±1.3% rdg ±4 dgt
	Operating temperature	-25°C to 65°C (non-condensating)
	Storage temperature Dustproof and waterproof	-25°C to 65°C, 80% RH or less (non-condensating) IP65, IP67
Other	Standards	EN61010 (Safety, Main unit, Measuring circuit), EN61326 (EMC), EN61557 (Earth tester)
	Power supply Number of uses	LR6 alkaline battery × 4 500 times ¹
	Dimensions (W × H × D)	185 × 111 × 44 mm (7.28 × 4.37 × 1.73 in)
	Weight	570 g (20.1 oz)

¹ 3-electrode method, measuring 10 Ω in 10-second intervals, Without Z3210

FT6031 • FT3151

Included accessories



C0106



L9840

- CARRYING CASE C0106
- AUXILIARY EARTHING ROD L9840
(2 piece set, 270 mm/10.63 in, Stainless steel)
- MEASUREMENT CABLE L9842-11
(Yellow 10 m (32.81 ft) length, equipped with winder)
- MEASUREMENT CABLE L9842-22
(Red 20 m (65.62 ft) length, equipped with winder)
- MEASUREMENT CABLE L9841 (black 4 m (13.12 ft) length)
- LR6 alkaline battery × 6
- Instruction manual



L9842-11



L9842-22

ANALOG EARTH TESTER FT3151

Product warranty for 3 years
Accuracy guaranteed for 1 year

2-electrode Class D

3-electrode Class A to D

CAT II 300 V

Order code **FT3151**

Measurement parameters	Measurement system	Two-electrode method (Class D) Three-electrode method (Class A to D)
	Range configuration Accuracy	10 Ω (0 to 11.5 Ω): ±0.25 Ω 100 Ω (0 to 115 Ω): ±2.5 Ω 1000 Ω (0 to 1150 Ω): ±25 Ω
	Earth potential: Accuracy	0 to 30 V: ±3.0% f.s.
	Operating temperature	0°C to 40°C, 80% RH or less (non-condensating)
	Storage temperature Dustproof and waterproof	-10°C to 50°C, 80% RH or less (non-condensating) IP40 (EN60529)
Other	Standards	EN61010 (Safety, measuring circuit, probe), EN61326 (EMC), EN61557-1/-5 (Earth tester)
	Power supply Number of uses	LR6 alkaline battery × 6 1100 times ¹
	Dimensions (W × H × D)	164 × 119 × 88 mm (6.46 × 4.69 × 3.46 in)
	Weight	760 g (26.8 oz)

¹ 30 sec. measurement/30 sec. rest, 3-electrode method, 575 Hz, auxiliary grounding electrode resistance of 100 Ω, measuring 10 Ω in the instrument's × 1 Ω range

Options

1	MEASUREMENT CABLE L9843-51	50 m (164.04 ft)
2	MEASUREMENT CABLE L9843-52	50 m (164.04 ft)
3	MEASUREMENT CABLE L9844	For earthing terminal board red/yellow/black 1.2 m (3.94 ft) each
4	TEST LEAD L9787	For simplified measurement method
5	EARTH NETS 9050	2 sheets in set
6	SHOULDER STRAP Z5022	For FT3151 only



CLAMP ON EARTH TESTER FT6380-50

Product warranty for 3 years
Accuracy guaranteed for 1 year

φ32 mm

True RMS

For multi-grounded systems

CAT IV 600 V



WIRELESS ADAPTER Z3210 (Option): Attach to enable Bluetooth® wireless technology

Model FT6380-90 includes Z3210 as a set

With Z3210



Please see www.hioki.com for list of supported regions.

GENNECT
Cross

Z3210

Order code **FT6380-50**Order code **FT6380-90**Order code **Z3210**

Included accessories



- Carrying case
- Resistance check loop (1 Ω, 25 Ω)
- Strap
- LR06 alkaline battery × 2
- Instruction manual

Carrying case Resistance check loop

Measurements for Multi-Grounded Systems




Hazardous Storage Tanks



Transmission Towers

Measurement parameters	Measurement system	Instrument has two cores for voltage injection and current measurement. Total circuit loop resistance is calculated from defined voltage and measured current. ¹
	Earthing resistance range	0.20 Ω/2.00 Ω/20.00 Ω/50.0 Ω/100.0 Ω/ 200.0 Ω/400 Ω/600 Ω/1200 Ω/1600 Ω Guaranteed accuracy range: 0.02 Ω to 1600 Ω Accuracy: ±1.5% rdg ±0.02 Ω
	AC Current range	20.00 mA/200.0 mA/2.000 A/20.00 A/60.0 A Guaranteed accuracy range: 1.00 mA to 60.0 A Accuracy: ±2.0% rdg ±0.05 mA
	Operating temperature	-10°C to 50°C, 80% RH or less (non-condensating)
	Storage temperature	-20°C to 60°C, 80% RH or less (non-condensating)
Other	Dustproof and waterproof	IP40 (EN60529) ²
	Standards	EN61010 (Safety), EN61326 (EMC)
	Power supply Continuous operating time	LR6 alkaline battery × 2 35 hours (backlight OFF)
	Dimensions (W × H × D)	73 × 218 × 43 mm (2.87 × 8.58 × 1.69 in)
	Weight	620 g (21.9 oz)

¹ For multi-grounded systems only. In a multi-grounded system, the larger the number of grounding poles, the more accurate the measured value.² When jaw closes

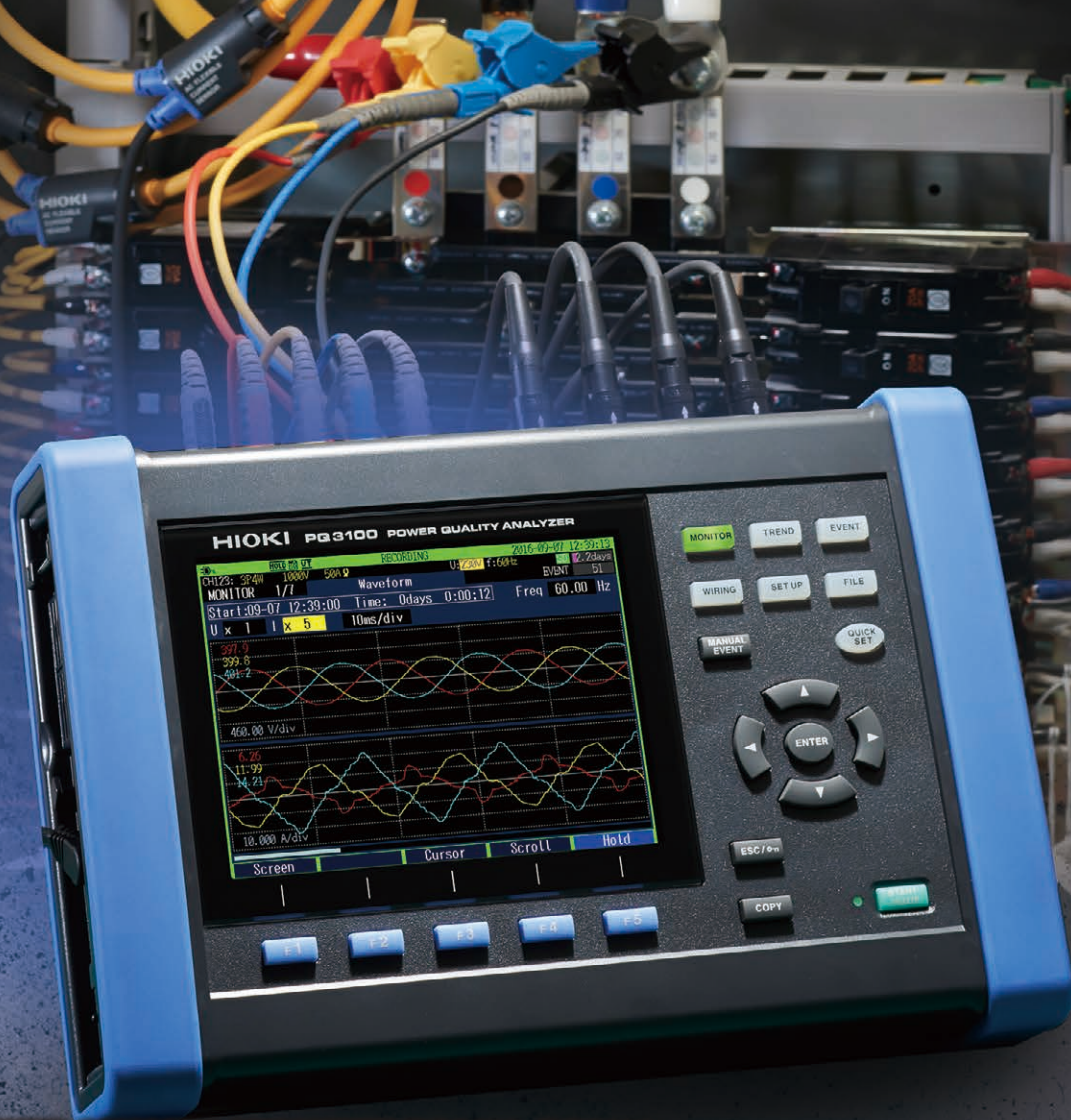

POWER QUALITY ANALYZER PQ3198, PQ3100

Monitor power quality and analyze the cause of equipment issues




Power anomalies are a major cause of equipment malfunction and damage. The PQ3198 and PQ3100 detect power supply abnormalities without fail to help diagnose the cause of problems.



Capture all of these power anomalies simultaneously

- Transient voltages
- Voltage swells
- Voltage dips
- Interruptions
- Frequency fluctuations
- Inrush current
- Harmonics
- High-order harmonics (Supraharmonics)

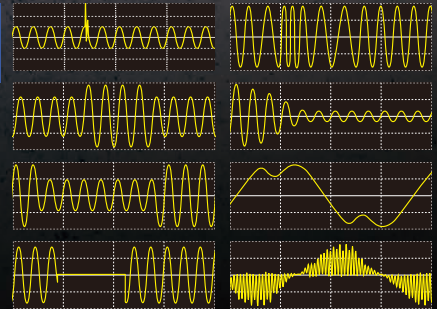

POWER QUALITY ANALYZERS




POWER QUALITY ANALYZER PQ3198, PQ3100

Product warranty for 3 years
Accuracy guaranteed for 1 year

Shared features: Side

Left side

Right side



- 1 Power switch
- 2 AC adapter terminal
- 3 Charging indicator
- 4 Cable hook

- 5 Strap attachment point
- 6 SD card terminal
- 7 USB terminal
- 8 LAN terminal
- 9 RS-232C terminal
- 10 External I/O terminal



PQ3198 (High-end model)

CAT IV 600 V



Voltage input terminals
(4 channels: channels 1/2/3 and
channel 4 are isolated from each other)

Current input terminals
(4 channels)



PQ3100 (Standard model)

CAT IV 600 V, CAT III 1000 V



Voltage input
terminals (4 channels)

Current input
terminals (4 channels)

Model	PQ3198 (High-end model)	PQ3100 (Standard model)
Measurement lines	1-phase/2-wire, 1-phase/3-wire, 3-phase/3-wire, 3-phase/4-wire + CH 4	
Fundamental frequency	DC/50 Hz/60 Hz/400 Hz	DC/50 Hz/60 Hz
Voltage ranges	Voltage measurement: 600.00 V rms Transient measurement: 6.0000 kV peak ±0.1% of nominal voltage	Voltage measurement: 1000.0 V rms or DC Transient measurement: 2.200 kV peak ±0.2% of nominal voltage
Current ranges	500.00 mA to 5.0000 kA AC ¹ ±0.1% rdg ±0.1% f.s. + current sensor accuracy	(AC) 50.000 mA to 5.0000 kA ¹ (DC) 10.000 A to 2.0000 kA ¹ ±0.1% rdg ±0.1% f.s. + current sensor accuracy
Power ranges	300.00 W to 3.0000 MW (AC) ±0.2% rdg ±0.1% f.s. + current sensor accuracy (DC) ±0.5% rdg ±0.5% f.s. + current sensor accuracy (CH4 Only)	50.000 W to 6.0000 MW (AC) ±0.2% rdg ±0.1% f.s. + current sensor accuracy (DC) ±0.5% rdg ±0.5% f.s. + current sensor accuracy
Measurement items	1. Transient voltage: 2MHz sampling 2. Frequency cycle: calculated as one cycle 3. Voltage (1/2) RMS: one cycle calculation refreshed every half cycle Current (1/2) RMS: half-cycle calculation 4. Voltage swell, voltage dips, voltage interruption 5. Inrush current 6. Voltage waveform comparison 7. Instantaneous flicker value: As per IEC61000-4-15 8. 200 ms frequency: calculated as 10 or 12 cycles, 40 to 70 Hz 9. 10 sec frequency: calculated as the whole-cycle time during the specified 10 s period, 40 to 70 Hz 10. Voltage waveform peak, Current waveform peak 11. Voltage, current, active power, apparent power, reactive power, active energy, reactive energy, power factor, displacement power factor, voltage unbalance factor, current unbalance factor, and efficiency 12. High-order harmonic (Supraharmonic) component (voltage/current): 2 kHz to 80 kHz 13. Harmonic/Harmonic phase angle (voltage/current), harmonic power: 0th to 50th orders 14. Harmonic voltage-current phase angle: 1st to 50th orders 15. Total harmonic distortion factor (voltage/current) 16. Inter harmonic (voltage/current): 0.5th to 49.5th order 17. K Factor (multiplication factor) 18. IEC Flicker, Δ V10 Flicker	1. Transient voltage: 200 kHz sampling 2. Frequency cycle: calculated as one cycle 3. Voltage (1/2) RMS - Current (1/2) RMS: one cycle calculation refreshed every half cycle 4. Voltage swell, voltage dips, voltage interruption, RVC: Voltage (1/2) RMS calculation 5. Inrush current 6. Frequency 200 ms: calculated as 10 or 12 cycles 7. 10-sec frequency: calculated as the whole-cycle time during the specified 10 s period 8. Voltage waveform peak, current waveform peak 9. Voltage, current, active power, apparent power, reactive power, active energy, apparent energy, reactive energy, energy cost, power factor, displacement power factor, voltage unbalance factor, current unbalance factor 10. Voltage crest factor, current crest factor 11. Harmonic/Harmonic phase angle (voltage/current), harmonic power: 0th to 50th orders 12. Harmonic voltage-current phase angle: 1st to 50th orders 13. Total harmonic distortion factor (voltage/current) 14. Inter harmonic (voltage/current): 0.5th to 49.5th orders 15. K Factor (multiplication factor) 16. IEC Flicker, Δ V10 Flicker
Record	Repeated ON: 1 year, maximum recording event: 9999 × 366 days (up to 9999 events per day) Repeated off: 35 days, maximum recording event: 9999 events	Maximum recording interval: 1 year, maximum number of recordable events: 9999 × 365 days
Setup assistance	Simplified setup function	QUICK SET (navigation-style assistance from connecting the instrument to the start of recording)
Interfaces	SD/SDHCmemory card ² , RS-232C, USB2.0, LAN	
Operating temperature	0°C to 30°C (95% RH or less), 30°C to 50°C (80% RH or less) (non-condensating)	-20°C to 50°C (80% RH or less) (non-condensating)
Storage temperature	10°C greater than operating temperature and humidity range	
Standards	EN61010 (Safety), EN61326 Class A (EMC)	
IEC 61000-4-30	Class A	Class S
Power supply	AC ADAPTER Z1002, BATTERY PACK Z1003	
Battery operating time	3 hours	8 hours
Dimensions (W × H × D)	300 × 211 × 68 mm (11.81 × 8.31 × 2.68 in)	
Weight	2.6 kg (91.7 oz) (including BATTERY PACK)	2.5 kg (88.2 oz) (including BATTERY PACK)



L1000



L1000-05



Z1002



Z1003



Z4001

PQ3198 Included accessories

- VOLTAGE CORD L1000
- AC ADAPTER Z1002
- BATTERY PACK Z1003
- PQ ONE (software CD)
- SD MEMORY CARD Z4001
- USB cable
- Color clips
- Spiral tubes
- Strap
- Measurement guide
- User manual

PQ3100 Included accessories

- VOLTAGE CORD L1000-05
- AC ADAPTER Z1002
- BATTERY PACK Z1003
- PQ ONE (software CD)
- USB cable
- Color clips
- Spiral tubes
- Strap
- Measurement guide
- User manual

Order code **PQ3198**

Order code **PQ3198-92** Value Kits: PQ3198, CT7136³ (600A) × 4, L1021-02×3, CARRYING CASE C1009

Order code **PQ3198-94** Value Kits: PQ3198, CT7045³ (6000A) × 4, L1021-02×3, CARRYING CASE C1009

Order code **PQ3100**

Order code **PQ3100-91** Value Kits: PQ3100, CT7136³ (600A) × 2, SD MEMORY CARD 2GB Z4001, CARRYING CASE C1009

Order code **PQ3100-92** Value Kits: PQ3100, CT7136³ (600A) × 4, SD MEMORY CARD 2GB Z4001, CARRYING CASE C1009

Order code **PQ3100-94** Value Kits: PQ3100, CT7045³ (6000A) × 4, SD MEMORY CARD 2GB Z4001, CARRYING CASE C1009

¹ Depends on current sensor in use

² Use only SD Cards sold by HIOKI. Compatibility and performance are not guaranteed for PC cards made by other manufacturers.

³ For more detailed information on CT7136, CT7045, and options, please refer to p.44 and p.45.



CLAMP ON POWER LOGGER PW3365, PW3360

Accurately measure power consumption, also available with non-contact voltage sensor for added safety

SAFETY VOLTAGE SENSOR PW9020 (for PW3365 only)

- Clamp on top of cable insulation
- Quick setup
- Safely avoid contact with live parts




Compared with standard alligator clips that are hard to use and require metal-to-metal contact



Toggle displays to easily verify data



List display



Waveform

Demand Graph




Trend Graph

QUICK SET navigation



Highly Intuitive



Check Connection Status

POWER CONSUMPTION

CLAMP ON POWER LOGGER PW3365, PW3360

Product warranty for 3 years
Accuracy guaranteed for 1 year

SAFETY VOLTAGE SENSOR PW9020

Compatible with PW3365 only

Finished outer diameter

φ6 mm (0.24 in) to φ30 mm (1.18 in)



PW3365

CAT IV 300 V, CAT III 600 V



PW3360

CAT IV 300 V, CAT III 600 V



Model	PW3365 + PW9020	PW3360
Measurement line	1-phase/2-wire (1/2/3 circuits), 1-phase/3-wire (1 circuit), 3-phase/3-wire (1 circuit), 3-phase/4-wire (1 circuit), Current only: 1 to 3 channels	
Frequency	50 Hz/60 Hz	
Voltage ranges	400 V AC (Effective measurement range: 90.0 V to 520.0 V)	600 V AC (Effective measurement range: 90.0 V to 780.0 V)
Accuracy	±1.5% rdg ±0.2% f.s. (combined accuracy with PW9020)	±0.3% rdg ±0.1% f.s.
Current ranges	500.00 mA AC to 5.0000 kA ¹ (Leak clamp on sensor only: 50.000 mA AC to 5.0000 A)	
Accuracy	±0.3% rdg ±0.1% f.s. + current sensor accuracy	
Power ranges	200.00 W to 6.0000 MW	300.00 W to 9.0000 MW
Accuracy	±2.0% rdg ±0.3% f.s. + current sensor accuracy	±0.3% rdg ±0.1% f.s. + current sensor accuracy
Measurement items	Voltage	RMS value, fundamental wave value, waveform peak (absolute value), fundamental wave phase angle, frequency (U1)
	Current	RMS value, fundamental wave value, waveform peak (absolute value), fundamental wave phase angle
	Power	Active power, reactive power, apparent power, power factor, (with lag, lead display) or displacement power factor (with lag, lead display), active energy (consumption, regeneration), reactive energy (lag, lead), Energy cost display (per-kWh price × power consumption)
	Demand	Active power demand value (consumption, regeneration), reactive power demand value (lag, lead), Active power demand quantity (consumption, regeneration), reactive power demand quantity (lag, lead), power factor demand value
	Harmonics	Harmonic voltage, harmonic current, voltage total harmonic distortion (THD-F or THD-R), current total harmonic distortion (THD-F or THD-R), up to the 13th order
	Pulse input	N / A
Other	Data save interval	1 sec to 30 sec, 1 minute to 60 minutes, 14 selections
	Interfaces	SD/SDHC memory card ² , LAN, USB2.0, FTP
	Operating temperature	0°C to 50°C, 80% RH or less (non-condensating)
	Storage temperature	-10°C to 60°C, 80% RH or less (non-condensating)
	Standards	EN61010 (Safety), EN61326 (EMC)
	Power supply	AC ADAPTER Z1008, BATTERY PACK 9459
	Battery operating time	5 hours
	Dimensions (W × H × D)	180 × 100 × 68 mm (7.09 × 3.94 × 2.68 in) (with PW9002)
Weight	820 g (28.9 oz) (with PW9002)	830 g (29.3 oz) (with PW9002)

SAFETY VOLTAGE SENSOR PW9020 Specifications

Compatible conductor types	Insulated wires ³ (indoor PVC) or metal parts
Compatible conductor diameters	Finished outer diameter φ6 mm to φ30 mm (φ0.24 in to φ1.18 in)
Effective measurement range	90 V to 520 V
Safety standard category	CAT IV 300 V/CAT III 600 V
Operating temperature	0°C to 50°C, 80% RH or less (non-condensating)
Storage temperature	-10°C to 60°C, 80% RH or less (non-condensating)
Standards	EN61010 (Safety), EN61326 (EMC)
Cord length	3 m (9.84 ft)
Weight	220 g (7.8 oz)

¹ Depends on current sensor in use. For more detailed information on sensors, please refer to p.44, and p.45.² Use only SD Cards sold by HIOKI. Compatibility and performance are not guaranteed for PC cards made by other manufacturers.³ Shielded wires cannot be measured. The product may not be able to accurately measure multicore cables or cables that have thick insulation.

PW9020



Z1008



L9438-53



Z1006

PW3360 Included accessories

- VOLTAGE CORD L9438-53 (black, red, yellow, blue @ 1 each)
- AC ADAPTER Z1006
- USB cable 0.9 m (2.95 ft)
- Instruction manual, Measurement guide
- Color clips (red, blue, yellow, white @ 2 each)
- Spiral tubes × 5







PW3365 Included accessories








- SAFETY VOLTAGE SENSOR PW9020 ×4
- AC ADAPTER Z1008
- USB cable 0.9 m (2.95 ft)
- Instruction manual, Measurement guide
- Color clips (red, blue, yellow, white @ 4 each)
- Spiral tubes × 10

Order code **PW3365-20**Order code **PW3360-20**Order code **PW3360-21** with harmonic analysis function







Options






CURRENT SENSOR (For PQ3198, PQ3100, CM7290, CM7291)

Features	Make measurements over extended period of time without zero-adjustment, even in locations with temperature variations			AC/DC current sensors for observing instantaneous waveforms		
Model name	AC/DC AUTO-ZERO CURRENT SENSOR			AC/DC CURRENT SENSOR		
Model	CT7731	CT7736	CT7742	CT7631	CT7636	CT7642
Appearance						
Rated measurement current	100 A AC/DC	600 A AC/DC	2000 A AC/DC	100 A AC/DC	600 A AC/DC	2000 A AC/DC
Max. allowable peak input	150 A peak	900 A peak	2840 A peak	150 A peak	900 A peak	2840 A peak
Bandwidth	DC to 5 kHz (-3dB)	DC to 5 kHz (-3dB)	DC to 5 kHz (-3dB)	DC to 10 kHz (-3dB)	DC to 10 kHz (-3dB)	DC to 10 kHz (-3dB)
Amplitude accuracy (DC, 45 to 66 Hz)	±1.0% rdg ±0.5% f.s.	±2.0% rdg ±0.5% f.s.	±1.5% rdg ±0.5% f.s.	±1.0% rdg ±0.5% f.s.	±2.0% rdg ±0.5% f.s.	±1.5% rdg ±0.5% f.s.
Output rate	1 mV/A	1 mV/A	0.1 mV/A	1 mV/A	1 mV/A	0.1 mV/A
Max. rated voltage to earth	(AC/DC) CAT IV 600 V	(AC/DC) CAT IV 600 V, CAT III 1000 V	(AC/DC) CAT IV 600 V, CAT III 1000 V	(AC/DC) CAT IV 600 V	(AC/DC) CAT IV 600 V, CAT III 1000 V	(AC/DC) CAT IV 600 V, CAT III 1000 V
Operating temperature	-25°C to 65°C	-25°C to 65°C	-25°C to 65°C	-25°C to 65°C	-25°C to 65°C	-25°C to 65°C
Core jaw diameter	φ33 mm or less	φ33 mm or less	φ55 mm or less	φ33 mm or less	φ33 mm or less	φ55 mm or less

Features	Attaches easily to thick cables, even in confined spaces			For accurately measuring load current			For measuring leakage current
Model name	AC FLEXIBLE CURRENT SENSOR			AC CURRENT SENSOR			AC LEAKAGE CURRENT SENSOR
Model	CT7044	CT7045	CT7046	CT7126	CT7131	CT7136	CT7116
Appearance							
Rated measurement current	6000 A AC	6000 A AC	6000 A AC	60 A AC	100 A AC	600 A AC	6 A AC
Max. allowable peak input	15000 A peak	15000 A peak	15000 A peak	100 A peak	200 A peak	900 A peak	30 A peak
Bandwidth	10 to 50 kHz (within ±3 dB)	10 to 50 kHz (within ±3 dB)	10 to 50 kHz (within ±3 dB)	40 to 20 kHz	40 to 20 kHz	40 to 20 kHz	40 to 5 kHz
Amplitude accuracy (45 to 66 Hz)	±1.5% rdg ±0.25% f.s.*	±1.5% rdg ±0.25% f.s.*	±1.5% rdg ±0.25% f.s.*	±0.3% rdg ±0.01% f.s.	±0.3% rdg ±0.02% f.s.	±0.3% rdg ±0.01% f.s.	±1.0% rdg ±0.05% f.s.
Output rate	1 mV/A (600 A) 0.1 mV/A (6000 A)	1 mV/A (600 A) 0.1 mV/A (6000 A)	1 mV/A (600 A) 0.1 mV/A (6000 A)	10 mV/A	1 mV/A	1 mV/A	100 mV/A
Max. rated voltage to earth	(AC) CAT IV 600 V, CAT III 1000 V	(AC) CAT IV 600 V, CAT III 1000 V	(AC) CAT IV 600 V, CAT III 1000 V	(AC) CAT III 300 V	(AC) CAT III 300 V	(AC) CAT IV 600 V, CAT III 1000 V	Insulated conductor
Operating temperature	-25°C to 65°C	-25°C to 65°C	-25°C to 65°C	-10°C to 50°C	-10°C to 50°C	-10°C to 50°C	-25°C to 65°C
Core jaw diameter	φ100 mm or less	φ180 mm or less	φ254 mm or less	φ15 mm or less		φ46 mm or less	φ40 mm or less

CURRENT SENSOR (For PW3365, PW3360)

Features	For load current levels: Voltage output					
Model name	CLAMP ON SENSOR					
Model	9694	9660	9661	9669	9695-02	9695-03
Appearance						
Rated measurement current	5 A AC	100 A AC	500 A AC	1000 A AC	50 A AC	100 A AC
Output rate	10 mV/A	1 mV/A	1 mV/A	0.5 mV/A	10 mV/A	1 mV/A
Amplitude accuracy (45 to 66 Hz)	±0.3% rdg ±0.02% f.s.	±0.3% rdg ±0.02% f.s.	±0.3% rdg ±0.01% f.s.	±1.0% rdg ±0.01% f.s.	±0.3% rdg ±0.02% f.s.	±0.3% rdg ±0.02% f.s.
Max. rated voltage to earth	(AC) CAT III 300 V	(AC) CAT III 300 V	(AC) CAT III 600 V	(AC) CAT III 600 V	(AC) CAT III 300 V	(AC) CAT III 300 V
Operating temperature	0°C to 50°C	0°C to 50°C	0°C to 50°C	0°C to 50°C	0°C to 50°C	0°C to 50°C
Core jaw diameter	φ15 mm or less	φ15 mm or less	φ46 mm or less	φ55 mm or less 80x20 mm busbar	φ15 mm or less	φ15 mm or less

Features	For load current levels: Voltage output			For leak current: Voltage output	
Model name	AC FLEXIBLE CURRENT SENSOR			CLAMP ON LEAK SENSOR	
Model	CT9667-01	CT9667-02	CT9667-03	9657-10	9675
Appearance					
Rated measurement current	5000 A AC/500 A AC	5000 A AC/500 A AC	5000 A AC/500 A AC	10 A AC	10 A AC
Output rate	0.1 mV/A (5000 A) 1 mV/A (500 A)	0.1 mV/A (5000 A) 1 mV/A (500 A)	0.1 mV/A (5000 A) 1 mV/A (500 A)	100 mV/A	100 mV/A
Amplitude accuracy (45 to 66 Hz)	±2% rdg ±0.3% f.s.*	±2% rdg ±0.3% f.s.*	±2% rdg ±0.3% f.s.*	±1.0% rdg ±0.05% f.s.	±1.0% rdg ±0.005% f.s.
Max. rated voltage to earth	(AC) CAT IV 600 V (AC) CAT III 1000 V	(AC) CAT IV 600 V (AC) CAT III 1000 V	(AC) CAT IV 600 V (AC) CAT III 1000 V	Insulated conductor	Insulated conductor
Operating temperature	-25°C to 65°C	-25°C to 65°C	-10°C to 50°C	0°C to 50°C	0°C to 50°C
Core jaw diameter	φ100 mm or less	φ180 mm or less	φ254 mm or less	φ40 mm or less	φ30 mm or less

*At center of flexible loop

1	EXTENSION CABLE L0220-01	2 m (6.56 ft), for PL14 connectors
2	EXTENSION CABLE L0220-02	5 m (16.4 ft), for PL14 connectors
3	EXTENSION CABLE L0220-03	10 m (32.81 ft), for PL14 connectors
4	EXTENSION CABLE L0220-04	20 m (65.62 ft), for PL14 connectors
5	EXTENSION CABLE L0220-05	30 m (98.43 ft), for PL14 connectors
6	EXTENSION CABLE L0220-06	50 m (164.04 ft), for PL14 connectors
7	EXTENSION CABLE L0220-07	100 m (328.08 ft), for PL14 connectors
8	CONNECTION CABLE 9219	For 9695, 3 m (9.84 ft)
9	AC ADAPTER 9445-02	For CT9667
10	CONVERSION CABLE L9910	To convert output connector: BNC to PL 14



PQ3198, PQ3100		
Voltage	1	VOLTAGE CORD L1000 Red/ Yellow/ Blue/Gray @ 1 each, Black x 4, 3 m (9.84 ft), Alligator clip x 8
	2	VOLTAGE CORD L1000-05 Red/ Yellow/ Blue/Gray/Black @ 1 each 1, 3 m (9.84 ft), Alligator clip x 5
	3	MAGNETIC ADAPTER 9804-01 Red, Alternative tip for the L1000, L1000-05
	4	MAGNETIC ADAPTER 9804-02 Black, Alternative tip for the L1000, L1000-05
	5	GRABBER CLIP L9243 Alternative tip for the L1000, L1000-05
	6	PATCH CORD L1021-01* 0.5 m (1.64 ft), Red, Banana branch-banana
	7	PATCH CORD L1021-02* 0.5 m (1.64 ft), Black, Banana branch-banana
Record	8	SD MEMORY CARD 2GB Z4001 Use only SD Cards sold by HIOKI. Compatibility and performance are not guaranteed for PC cards made by other manufacturers.
	9	SD MEMORY CARD 8GB Z4003
Communication	10	RS-232C CABLE 9637 For PQ3100, pin - 9 pin, cross, 1.8 m (5.91 ft)
	11	LAN CABLE 9642 5 m (16.4 ft), Straight, Cross conversion adapter
Power supply	12	AC ADAPTER Z1002 100 V AC to 240 V AC
	13	BATTERY PACK Z1003 7.2 V, Ni-MH
Connection	14	WIRING ADAPTER PW9000 For PQ3198, for 3-phase/3-wire connection
	15	WIRING ADAPTER PW9001 For PQ3198, for 3-phase/4-wire connection
Other	16	GPS BOX PW9005 For PQ3198
	17	CARRYING CASE C1009 Bag type
	18	CARRYING CASE C1002 Hard trunk type
	19	MAGNETIC STRAP Z5004
	20	MAGNETIC STRAP Z5020 Extra strength

* Only for PQ3198

PW3365, PW3360		
Voltage	1	SAFETY VOLTAGE SENSOR PW9020 For PW3365, 3 m (9.84 ft)
	2	VOLTAGE CORD L9438-53 For PW3360, Black/ Red/ Yellow/ Blue, 3 m (9.84 ft) length, Alligator clip x 4
	3	MAGNETIC ADAPTER 9804-01 For PW3360, Red, $\Phi 11$ mm (0.43 in)
	4	MAGNETIC ADAPTER 9804-02 For PW3360, Black, $\Phi 11$ mm (0.43 in)
	5	PATCH CORD L1021-01 For PW3360, 0.5 m (1.64 ft), Red, Banana branch-banana
	6	PATCH CORD L1021-02 For PW3360, 0.5 m (1.64 ft), Black, Banana branch-banana
	7	SD MEMORY CARD 2GB Z4001 Use only SD Cards sold by HIOKI. Compatibility and performance are not guaranteed for PC cards made by other manufacturers.
Record	8	SD MEMORY CARD 8GB Z4003
	9	LAN CABLE 9642 5 m (16.4 ft), Straight, Cross conversion adapter
Communication	10	POWER LOGGER VIEWER SF1001 Software to analyze measurement data
	11	AC ADAPTER Z1008 For PW3365, 100V AC to 240V
Power supply	12	AC ADAPTER Z1006 For PW3360, 100V AC to 240V
	13	BATTERY SET PW9002 Battery case and 9459 Set
Other	14	BATTERY PACK 9459
	15	CARRYING CASE C1005
	16	CARRYING CASE C1008 For PW3365
	17	MAGNETIC STRAP Z5004

CM7290, CM7291		
Output	1	OUTPUT CORD L9094 Connect to Banana terminal, 1.5 m (4.92 ft)
	2	OUTPUT CORD L9095 Connect to BNC terminal, 1.5 m (4.92 ft)
	3	OUTPUT CORD L9096 Connect to terminal block, 1.5 m (4.92 ft)
Power supply	4	AC ADAPTER 9445-02
	5	CARRYING CASE C0220
Other	6	CARRYING CASE C0221
	7	MAGNETIC STRAP Z5004



DISPLAY UNIT CM7290, CM7291

CE
Product warranty for 3 years
Accuracy guaranteed for 3 years

Measurement sensors sold separately



CM7290

CM7291




Please see www.hioki.com for list of supported regions.



Included accessories

- Alkaline battery LR6 x 2
- Instruction manual
- Protector

Order code **CM7290**Order code **CM7291**

- Built-in Bluetooth® wireless technology
- Verify and record measured data with free GENNECT Cross mobile app
- *Available only with products displayed with the GENNECT Cross icon


Measurement parameters		DC, AC, DC+AC, Hz			
Measurement parameters	WAVE		Input signal Output signal		
	RMS		Convert and output as RMS value		
	PEAK		Output peak of each interval as absolute value		
	FREQ		Output frequency count per interval		
	Sensor	CT7731 CT7631	CT7736 CT7636	CT7742 CT7642	CT7044 CT7045 CT7046
Accuracy (output)	DC WAVE	±1.5% rdg ±1.3 mV	±2.5% rdg ±3.8 mV	±2.0% rdg ±1.8 mV	-
	AC WAVE	±1.5% rdg ±1.3 mV	±2.5% rdg ±3.8 mV	±2.5% rdg ±1.8 mV	±2.0% rdg ±2.3 mV
	AC RMS	±1.8% rdg ±1.3 mV	±2.8% rdg ±3.8 mV	±2.8% rdg ±1.8 mV	±2.3% rdg ±2.3 mV
Other	Output update time	PEAK: 0.02s (FAST)/0.2s (NORMAL)/1s (SLOW) FREQ: 0.2s (FAST)/0.2s (NORMAL)/3s (SLOW) (WAVE, RMS: analog output)			
	Operating temperature	-25°C to 65°C, 80% RH or less (non-condensating)			
	Storage temperature	-25°C to 65°C, 80% RH or less (non-condensating)			
	Dustproof and waterproof	IP54 ¹⁾			
	Standards	EN61010 (Safety), EN61326 (EMC)			
	Power supply	Alkaline battery LR6 x 2, external power supply			
	Continuous operating time	16 hours (backlight OFF)			
Dimensions (W x H x D)		52 x 163 x 37 mm (2.05 x 6.42 x 1.46 in)			
Weight		220 g (7.8 oz)			

¹⁾ With sensor connected and caps fitted to AC adapter and power connector

BATTERY TESTER BT3554-50, BT3554-51, BT3554-52

Properly diagnose deterioration of UPS lead-acid batteries even under noisy environments

Tough against inverter noise during UPS startup

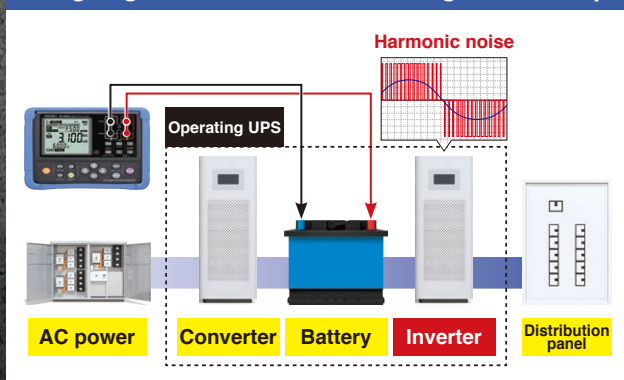

Completing an intensive inspection workload efficiently

The app provides audio guidance about the battery measurement sequence. And, automatically saves the measurement results.

1 2 3 4 5 ... 500

NEXT: Battery No.1
Receive measurement results
No.1 PASS

BATTERY TESTERS

BATTERY TESTER BT3554-50, BT3554-51, BT3554-52



Product warranty for 3 years
Accuracy guaranteed for 1 year



BT3554-50: Instrument only

With Z3210



Please see www.hioki.com
for list of supported regions.



**GENNECT
Cross**

BT3554-51: with 9465-10

With Z3210



Please see www.hioki.com
for list of supported regions.



**GENNECT
Cross**

BT3554-52: with L2020

With Z3210



Please see www.hioki.com
for list of supported regions.



**GENNECT
Cross**



**WIRELESS ADAPTER
Z3210 (Options):** Attach to
enable Bluetooth® wireless
technology



Included accessories

- PIN TYPE LEAD 9465-10 (BT3554-51 only)
- PIN TYPE LEAD L2020 (BT3554-51 only)
- Carrying Case C1014
- Protector Z5041
- Fuse Set Z5050
- ZERO ADJUSTMENT BOARD
- Neck strap
- USB cable
- GENNECT One Software CD
- Power-on option sticker
- Alkaline battery LR6 x 8
- Instruction manual

Order code **BT3554-50** Instrument only

Order code **BT3554-51** With 9465-10

Order code **BT3554-52** With L2020

Order code **BT3554-91** With 9465-10, Z3210

Order code **BT3554-92** With L2020, Z3210


Order code **Z3210**

Options

- PIN TYPE LEAD L2020
- PIN TYPE LEAD 9465-10
- PIN TYPE LEAD 9772
- CLIP TYPE LEAD WITH TEMPERATURE SENSOR 9460
- LARGE CLIP TYPE LEAD 9467
- TIP PIN 9465-90 For L2020, 9465-90
- TIP PIN 9772-90 For 9772
- REMOTE CONTROL SWITCH 9466 2 m (6.56 ft)
- TEMPERATURE PROBE 9451
- TEMPERATURE PROBE 9451-01
- 0 ADJ BOARD Z5038
- FUSE SET Z5050 This contains 5 pieces
- PROTECTOR Z5041
- CARRYING CASE C1014

Measurement parameters	Internal resistance measurement for batteries (AC four-terminal method)	
	Terminal voltage measurement for batteries (DC voltage)	
	Temperature measurement (when using the 9460)	
Resistance	Range	3 mΩ (Max. display: 3.100 mΩ, Resolution: 1 μΩ)
	Accuracy	30 mΩ (31.00 mΩ, 10 μΩ)
		300 mΩ (310.0 mΩ, 100 μΩ)
Measurement Current	Measurement	3 Ω (3.100 Ω, 1 mΩ)
	Accuracy	Accuracy: ±0.8% rdg ±6 dgt
Measurement frequency	Measurement	160 mA (3 mΩ, 30 mΩ range)
	Current	16 mA (300 mΩ range)
Voltage	Measurement	1.6 mA (3 Ω range)
	Frequency	1 kHz ±30 Hz (with function for avoiding noise frequency enabled: 1 kHz ±80 Hz)
Temperature	Measurement	6.000 V/60.00 V
	Accuracy	Accuracy: ±0.08% rdg ±6 dgt
Function	Measurement	-10.0°C to 60.0°C
	Accuracy	Accuracy: ±1.0°C
Other	Function	<ul style="list-style-type: none"> • Memory function (Up to 6000 data) • Auto memory function • Auto-hold function • Measurement Navigator (When using Z3210, GENNECT Cross: Voice guide output) • Tablet app (GENNECT Cross) • PC app (GENNECT One) • Comparator function (PASS/ WARNING/ FAIL) • Excel® Direct Input function (When using Z3210)
	Interfaces	USB2.0
Operating temperature	Measurement	0°C to 40°C, 80% RH or less (non-condensating)
	Storage temperature	-10°C to 50°C, 80% RH or less (non-condensating)
Standards	Measurement	EN61010 (Safety), EN61326 (EMC)
	Power supply	LR6 alkaline battery x 8
Continuous operating time	Measurement	8.5 hours
	Dimensions (W x H x D)	199 x 132 x 60.6 mm (7.83 x 5.20 x 2.39 in)
Weight	Measurement	960 g (33.8 oz)
	Weight	



The thresholds for determining the pass/fail condition of a battery depend on the specifications and standards of the battery manufacturer, battery type, capacity, etc. It is important and necessary to always conduct battery testing against the internal resistance and terminal voltage of a new or reference battery. In some cases, it may be difficult to determine the deterioration state of traditional open type (liquid) lead-acid or alkaline batteries, which demonstrate smaller changes in internal resistance than sealed lead acid batteries.

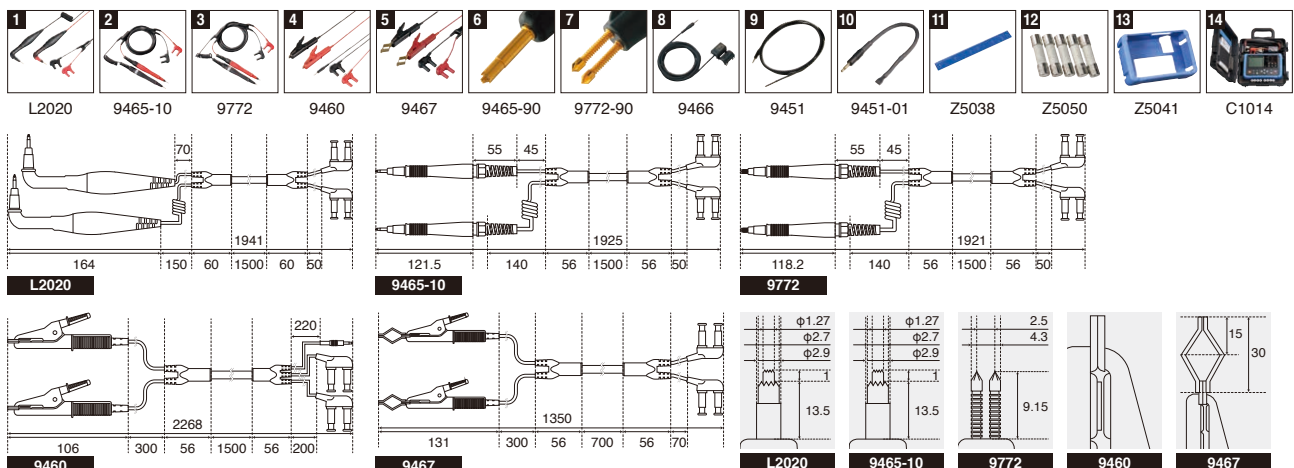

PV Maintenance


Inspect solar panel bypass diodes for opens and shorts

Improve testing efficiency by first inspecting the PV string, then testing individual modules for issues

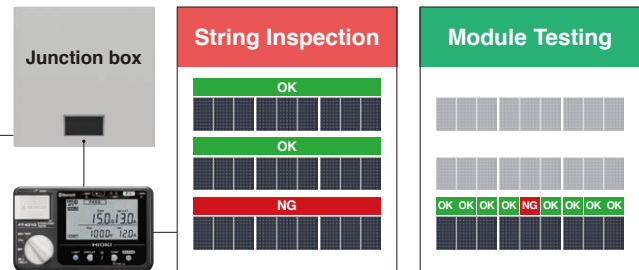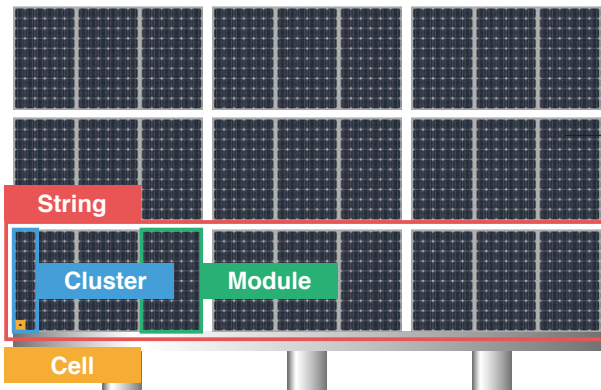


A FAIL decision will be output even if only one module within the string has malfunctioned. After identifying the problematic string, pinpoint the exact location by further inspecting at the module level.

- 1 RBPR: Bypass route resistance
- 2 Voc: Open-circuit voltage
- 3 Isc + α 1: Measurement current
- 4 Isc: Short-circuit current




Normal reading



Open fault

Test open-circuit voltage, short-circuit current, and bypass route resistance at the same time

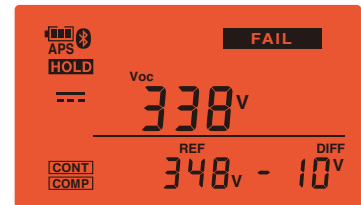

Short-circuit fault

Measure open-circuit voltage within 1 second and compare to reference value

BYPASS DIODE TESTER FT4310



Product warranty for 3 years
Accuracy guaranteed for 1 year



Please see www.hioki.com for list of supported regions.



Included accessories



- TEST LEAD SET WITH REMOTE SWITCH L9788-11
- CARRYING CASE C0206
- Instruction manual
- Alkaline battery LR6 x6

L9788-11 C0206

Options	
1	TEST LEAD SET WITH REMOTE SWITCH L9788-11 1.2 m (3.94 ft)
2	TEST LEAD WITH REMOTE SWITCH L9788-10 1.2 m (3.94 ft)
3	TIP PIN L9788-90 For L9788, L9788-10
4	BREAKER PIN L9788-92 For checking breaker terminal
5	CARRYING CASE C0206



*For detailed information about L9788, please refer to p.27

BPD TEST mode (Bypass diode)	
Measurement items	Bypass diode comparator judgment Bypass route resistor Open-circuit voltage Short-circuit current Measurement (applied) current
Measurement object	Crystal system string Open-circuit voltage: 1000 V DC or less Rated current: 2 A to 12 A DC
Measurement method	Short-circuit and pulse voltage application
Duration of shorting between terminals	10 ms or less
Output pulse	Voltage: 100 V DC or less, Pulse width: 5 ms or less Limiting current: Measured short-circuit current + 1 A or less, Maximum: 13 A
Voc mode (Open-circuit voltage)	
Measurement items	Open-circuit voltage
Measurement range	0 V to 1000 V DC (displayed up to 1200 V DC)
Response time	Within 1 sec.
Functions	Displays the number of bypass diode measurements Automatic polarity judgment function Comparison display Live circuit indicator Comparator Auto hold Backlight Auto power off Buzzer sounds Battery indicator
Operating temperature	-10 to 65°C, 80% RH or less (non-condensating)
Storage temperature	-20 to 65°C, 80% RH or less (non-condensating)
Dustproof and waterproof	IP40 (EN60529)
Standards	EN61010 (Safety), EN61326 ClassA (EMC)
Maximum input voltage	1000 V DC
Power supply	LR6 alkaline battery x 6
Continuous operating time	45 hours (Bluetooth® OFF)
Dimensions (W x H x D)	152 x 92 x 69 mm (5.98 x 3.62 x 2.72 in), Cable length 0.5m (1.64 ft)
Weight	650 g (22.9 oz)

COMPACT DATA LOGGERS

Measure with remote modules and collect data with central logging station

Send data to the LR8410 via Bluetooth® wireless communication

Measurement units



Main unit



Model	LR8510	LR8511	LR8512	LR8513	LR8514	LR8515
No. of input channels	15	15	2	2	2	2
Input type						
Voltage	✓	✓				✓
Temperature	✓	✓			✓	✓
Humidity		✓			✓	
Resistance		✓				
Pulse			✓			
Current				✓		



Sensor cable to main unit is eliminated. Shorter thermocouple cable lengths are less susceptible to noise, reducing effects on the measurement data. Complete wiring quickly and efficiently.

WIRELESS LOGGING STATION LR8410-20

Product warranty for 3 years
Accuracy guaranteed for 1 year

For more details about the LR85XX Series, please refer to p.51.



Order code	LR8410-20
Order code	LR8510
Order code	LR8511

LR8410-20 Included accessories

- SD MEMORY CARD 2GB Z4001
- USB cable
- AC ADAPTER Z1008 (also bundled with the LR8510, LR8511)
- CD-R (data collection software "Logger Utility")
- Instruction manual
- Measurement guide



Z4001

Z1008

Options	
1	AC ADAPTER Z1008 100 V to 240 V AC
2	SD MEMORY CARD 2GB Z4001
3	SD MEMORY CARD 8GB Z4003
4	BATTERY PACK Z1007
5	CARRYING CASE C1007
6	FIXED STAND Z1009
7	LAN CABLE 9642 5 m (16.4 ft), with straight-to-cross conversion adapter



Z1008

Z4001

Z4003

Z1007

C1007

Z1009

9642

LR8410-20

No. of measurement channels	Connect up to seven units wirelessly*1 (Units: LR8510, LR8511, LR8512, LR8513, LR8514, LR8515)
Pulse, digital input	2 pulse input channels 2 digital input channels (when using the LR8512)
Recording intervals	100 ms ² , 200 ms to 1 hour, 16 selections
Data storage	Internal memory: 8M-words; Data storage media: SD memory card or USB memory stick ³
Interfaces	LAN: 100BASE-TX, USB: USB 2.0 series mini-B receptacle
Functions	Save waveform data in real time to the SD memory card or USB memory stick, numerical value calculations, waveform calculations, 4ch alarm output (not isolated, common ground), and other functions
Operating temperature	-10 to 50°C, 80% rh or less (non-condensating)
Storage temperature	-20 to 60°C, 80% rh or less (non-condensating)
Standards	EN61010 (Safety), EN61326 classA, EN61000-3-2, EN61000-3-3 (EMC)
Power supply	AC ADAPTER Z1008 (100 to 240 V AC, 50/60 Hz)
Dimensions (W x H x D)	230 x 125 x 36 (9.06 x 4.92 x 1.42 in)
Weight	700 g (24.7 oz) (excluding battery pack)

LR8510

Log	Voltage, thermocouple
Channels	15ch (M3 screw type terminal block, 2 terminals per channel)
Measurement range	Voltage: -10 mV to 100 V, Thermocouple: -200°C to 1800°C ⁴
Accuracy	Voltage: ±10 μV, Thermocouple: ±0.6°C

LR8511

Log	Voltage, thermocouple, RTDs, resistance, humidity
Channels	15ch (Push-button terminals, 4 terminals per channel)
Measurement range	Voltage: -10 mV to 100 V, Thermocouple: -200 to 1800°C ⁴ RTDs: -100 to 500°C ⁴ , Resistance: 0 to 200 Ω, Humidity: 5.0 to 95.0% rh
Accuracy	Voltage: ±10 μV, Thermocouple: ±0.6°C RTDs: ±0.6°C, Resistance: ±10 mΩ, Humidity: ±5% rh

*1 Using Bluetooth® wireless technology

*2 Setting not available when the thermocouple burnout detection setting is ON

*3 Only data recorded to a genuine HIOKI SD memory card is guaranteed


*4 Depends on current sensor in use

Note: The LR8410-20 alone is not capable of making measurements. One or more input modules are necessary to measure. The main unit and input modules are not bundled with the Battery Pack Z1007 (Li-ion). Thermocouples are not provided by HIOKI, and must be purchased from a separate vendor. Use only HIOKI SD memory cards, which are manufactured to strict industrial standards, for long-term storage of important data. Correct operation of non-HIOKI SD cards or USB memory sticks is not guaranteed.

These products emit radio waves. Use of radio waves is subject to licensing requirements in certain countries. Use in countries or regions other than those listed above may constitute a violation of law, exposing the operator to legal penalties.

Collect data with portable transfer devices

Use the LR5091 or LR5092 to capture data and upload to the PC for analysis

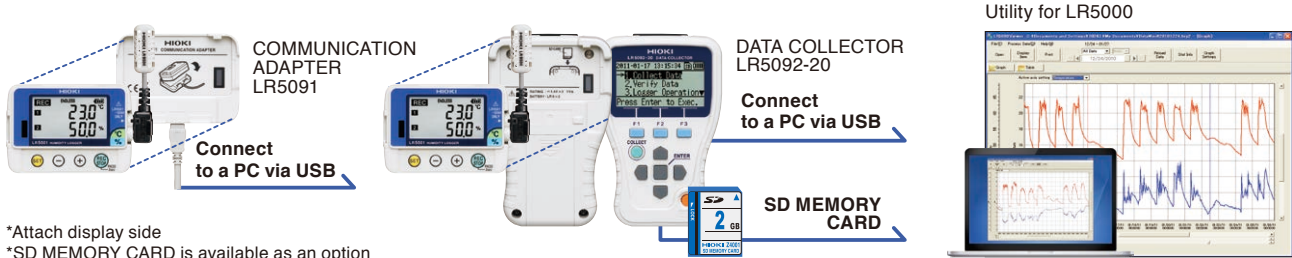

*Attach display side

*SD MEMORY CARD is available as an option

Model	HUMIDITY LOGGER LR5001	TEMPERATURE LOGGER LR5011	INSTRUMENTATION LOGGER LR5031	CLAMP LOGGER LR5051
Log	Temperature, Humidity	Temperature	4-20 mA Instrumentation Signals	Load Current, Leak Current
Appearance				
Channels	1ch (temperature), 1ch (humidity)	1ch	1ch	2ch
Measurement range	-40.0°C to 85.0°C (temperature) 0% RH to 100% RH (humidity)	-40.0°C to 180.0°C [†]	-30.00 mA to 30.00 mA	0.00 A to 1000 A AC [†]
Accuracy	±0.5°C (temperature) ±5% RH (humidity)	±0.5°C	±0.5% rdg ±5 dgt	±0.5% rdg ±5 dgt
Bundled sensor	HUMIDITY SENSOR LR9504	Sensor sold separately	CONNECTION CABLE LR9801	Sensor sold separately

Model	VOLTAGE LOGGER LR5041	VOLTAGE LOGGER LR5042	VOLTAGE LOGGER LR5043
Log	Instrumentation signals, Analog outputs		
Appearance			
Channels	1ch	1ch	1ch
Measurement range	-50.00 mV to 50.00 mV	-5.000 V to 5.000 V	-50.00 V to 50.00 V
Accuracy	±0.5% rdg ±5 dgt	±0.5% rdg ±5 dgt	±0.5% rdg ±5 dgt
Bundled sensor	CONNECTION CABLE LR9802	CONNECTION CABLE LR9802	CONNECTION CABLE LR9802

LR5091 or LR5092-20 is necessary to transfer data from a LR5000 series logger to a PC



COMMUNICATION ADAPTER LR5091
(USB cable bundled)



DATA COLLECTOR LR5092-20
(USB cable bundled)

[†] Depends on current sensor in use

LR50XX Series Shared Specifications

Measurement	Recording intervals	1/2/5/10/15/20/30 sec. /1/2/5/10/15/20/30/60 min.
	Recording modes	Instantaneous value, MAX/MIN/AVG
	Storage capacity	60,000 data sets per channel (instantaneous value)
Other	Operating temperature	LR5001, LR5011, LR5031, LR5041, LR5042, LR5043: -20°C to 70°C, 80% RH or less LR5051: 0°C to 50°C, 80% RH or less
	Power supply	LR6 alkaline battery x1 LR5051: LR6 alkaline battery x2
	Continuous operating time	LR5001: 3 months (1min. recording interval), 20 days (1sec.) LR5011: 2 years (1min. recording interval), 2 months (1sec.) LR5051: 1 years (1min. recording interval), 1 month (1sec.) LR5031, LR5041, LR5042, LR5043: 2 years (1min. recording interval), 2 months (1sec.)
	Dimensions (W x H x D)	79 x 57 x 28 mm (3.11 x 2.24 x 1.10 in) LR5051: 79 x 70 x 37 mm (3.11 x 2.76 x 1.46 in)
	Weight	105 g (3.7 oz), LR5051: 165 g (5.8 oz)

Order code **LR5001** HUMIDITY SENSOR LR9504, Kickstand

Order code **LR5011** Kickstand

Order code **LR5031** CONNECTION CABLE LR9801, Kickstand

Order code **LR5041** CONNECTION CABLE LR9802, Kickstand

Order code **LR5042** CONNECTION CABLE LR9802, Kickstand

Order code **LR5043** CONNECTION CABLE LR9802, Kickstand

Order code **LR5051**

LR50XX Series Included accessories

- LR6 alkaline battery x 1 (LR5051: LR6 alkaline battery x 2)
- Instruction manual, Operation guide



Product warranty for 3 years
Accuracy guaranteed for 1 year

Make logger settings and transfer data via Bluetooth® wireless communication

Use your tablet or PC to download data and configure measurement conditions



Model	WIRELESS PULSE LOGGER LR8512	WIRELESS CLAMP LOGGER LR8513	WIRELESS HUMIDITY LOGGER LR8514	WIRELESS VOLTAGE/TEMP LOGGER LR8515	WIRELESS FUNGAL LOGGER LR8520
Log	Pulse	Load Current, Leak Current	Temperature, Humidity	DCV, Temperature	Fungal Growth
Appearance					
Channels	2ch	2ch	2ch (temperature), 2ch (humidity)	2ch	1ch (temperature), 1ch (humidity)
Measurement range	Pulse: 0 to 1000m pulse No. of revolutions: 0 to 5000/n ¹ [r/s]	500.0 mA to 5000 A AC ² 10.00 A to 2000 A DC ²	-40.0°C to 80.0°C (temperature) 0.0% rh to 100% RH (humidity)	Voltage: -50 V to 50 V Thermocouple (K): -200°C to 999.9°C Thermocouple (T): -200°C to 400°C	Temperature: -40°C to 80°C Humidity: 0% RH to 100% RH (Calculates fungal index ⁴ from temperature and humidity)
Accuracy	-	±0.5 % rdg ±5 dgt	Temperature: ±0.5°C Humidity: ±3% RH ³	Voltage: ±0.05 mV Thermocouple: ±0.6°C	Thermocouple: ±0.5°C Humidity: ±3% RH ³
Bundled sensor	CONNECTION CABLE L1010	Sensor sold separately	Sensor sold separately	Sensor sold separately	Sensor sold separately

¹ n is the number of pulses, 1 to 1000, per revolution. ² Depends on current sensor in use ³ Hysteresis: ±1% rh (added to the humidity measurement accuracy).

⁴ This index, which predicts how easy it is for fungi to grow, was proposed by the late Keiko Abe, Doctor of Agriculture. Because fungal growth has a direct correlation with temperature and relative humidity, expected occurrence can be predicted.

LR85XX Series Shared Specifications

Measurement	Recording intervals	0.1 ¹ /0.2 ¹ /0.5/1/2/5/10/20/30 sec./1 min./2/5/10/20/30/1h
	Recording modes	Instantaneous value, MAX/MIN/AVG (LR8513 only)
	Communication reaches	30 m, line of sight
	Storage capacity	500,000 data sets per channel
Other	Operating temperature	-20°C to 60°C, 80% RH or less
	Power supply	LR6 alkaline battery × 2 AC ADAPTER Z2003 (option, DC12V)
	Continuous operating time ²	LR8512: 2 months (1min. recording interval), 2 months (1sec.) LR8513: 3 months (1min. recording interval), 1 month (1sec.) LR8514: 35 months (1min. recording interval), 3 months (1sec.) LR8515: 25 months (1min. recording interval), 10 days (1sec.) LR8520: 35 months (1min. recording interval), 3 months (1sec.)
	Dimensions (W × H × D)	LR8512, LR8514, LR8520: 85 × 61 × 31 mm (3.35 × 2.40 × 1.22 in) LR8513, LR8515: 85 × 75 × 38 mm (3.35 × 2.95 × 1.50 in)
	Weight	LR8512, LR8514, LR8520: 95 g (3.4 oz), LR8513: 130 g (4.6 oz), LR8515: 126 g (4.4 oz)

¹LR8512, LR8515 only ²With Bluetooth® communication OFF

Order code **LR8512** CONNECTION CABLE L1010 × 2

Order code **LR8513** -

Order code **LR8514** -

Order code **LR8515** -

Order code **LR8520** CONNECTION CABLE L1010 × 1


LR85XX Series Included accessories

- LR6 alkaline battery × 2
 - CD-R, Measurement Guide, Caution for Using Radio Waves
- (CD-R: Instruction Manual PDF, Logger Utility, Wireless Logger Collector)

Wireless Logger Collector (for collecting measurement data)	
Supported devices	Android tablet/Android smartphone Windows PC/Windows tablet
OS	Android OS 4.0.3 or later Windows 10/8/7 (32/64bit)
Number of available registrations	Max. 100 units
Output format	Logger Utility format LR5000 format Smart Site compatible format CSV format Text format

How to obtain software

For Windows PC: Supplied CD-R/Download from the HIOKI website
For Android tablet: Google Play™

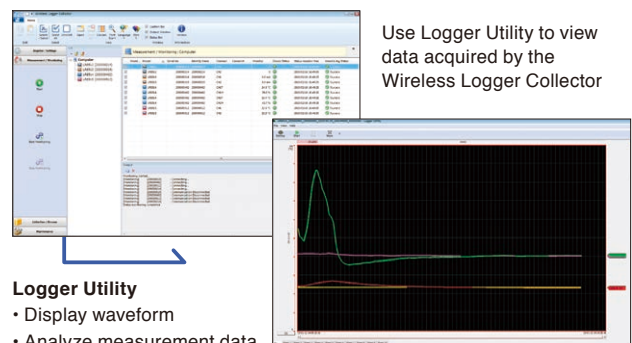

Logger Utility

- Display waveform
- Analyze measurement data

Clamp

Insulation

DIMMS

Detectors

Earth

Power quality

Power consumption

Battery

PV

Logger

LAN

Signal

Lux

Temperature

Options



HUMIDITY LOGGER LR5001		
1	HUMIDITY SENSOR LR9501	1 m (3.28 ft)
2	HUMIDITY SENSOR LR9502	5 m (16.4 ft)
3	HUMIDITY SENSOR LR9503	10 m (32.81 ft)
4	HUMIDITY SENSOR LR9504	4 cm (1.57 in)
TEMPERATURE LOGGER LR5011		
5	TEMPERATURE SENSOR LR9601	Molded plastic type, 1 m (3.28 ft)
6	TEMPERATURE SENSOR LR9602	Molded plastic type, 5 m (16.4 ft)
7	TEMPERATURE SENSOR LR9603	Molded plastic type, 10 m (32.81 ft)
8	TEMPERATURE SENSOR LR9604	Molded plastic type, 4.5 cm (1.77 in)
9	TEMPERATURE SENSOR LR9611	Lug type, 1 m (3.28 ft)
10	TEMPERATURE SENSOR LR9612	Lug type, 5 m (16.4 ft)
11	TEMPERATURE SENSOR LR9613	Lug type, 10 m (32.81 ft)
12	TEMPERATURE SENSOR LR9621	Sheathed type, 1 m (3.28 ft)
13	TEMPERATURE SENSOR LR9631	Needle type, 1 m (3.28 ft)
INSTRUMENTATION LOGGER LR5031		
14	CONNECTION CABLE LR9801	1 m (3.28 ft), 2 wires
VOLTAGE LOGGER LR5041, LR5042, LR5043, PULSE LOGGER LR5061		
15	CONNECTION CABLE LR9802	1 m (3.28 ft), 4 wires
LR50XX Series		
16	WALL-MOUNTED HOLDER LR9901	Cannot be used with LR5051
17	MAGNETIC STRAP Z5004	
DATA COLLECTOR LR5092		
18	SD MEMORY CARD 2GB Z4001	Use only SD Cards sold by HIOKI. Compatibility and performance are not guaranteed for PC cards made by other manufacturers.



WIRELESS PULSE LOGGER LR8512, WIRELESS FUNGAL LOGGER LR8520		
1	CONNECTION CABLE L1010	1.5 m (4.92 ft)
WIRELESS HUMIDITY LOGGER LR8514, WIRELESS FUNGAL LOGGER LR8520		
2	HUMIDITY SENSOR Z2010	50 mm (1.97 in)
3	HUMIDITY SENSOR Z2011	1.5 m (4.92 ft)
LR85XX Series		
4	AC ADAPTER Z2003	100 V to 240 V AC
5	MAGNETIC STRAP Z5004	
6	MAGNETIC STRAP Z5020	Extra strength



^{*1} At center of flexible loop
^{*2} Maximum measurable current when used with the LR8513, LR5051

CURRENT SENSORS (For LR8513, LR5051)						
Measurement application	For load current levels: Voltage output					
Model name	CLAMP ON SENSOR			AC FLEXIBLE CURRENT SENSOR		
Model	9669	9695-02	CT6500	CT9667-01	CT9667-02	CT9667-03
Appearance						
Rated measurement current	1000 A AC	50 A AC	500 A AC	5000 A AC/500 A AC	5000 A AC/500 A AC	5000 A AC/500 A AC
Output rate	0.5 mV/A	10 mV/A	1 mV/A AC	0.1 mV/A (5000 A) 1 mV/A (500 A)	0.1 mV/A (5000 A) 1 mV/A (500 A)	0.1 mV/A (5000 A) 1 mV/A (500 A)
Amplitude accuracy (DC, 45 to 66 Hz)	±1.0% rdg ±0.01% f.s.	±0.3% rdg ±0.02% f.s.	±1.5% rdg ±0.03% f.s.	±2% rdg ±0.3% f.s. ^{*1}	±2% rdg ±0.3% f.s. ^{*1}	±2% rdg ±0.3% f.s. ^{*1}
Max. rated voltage to earth	CAT III 600 V	CAT III 300 V	CAT III 600 V	CAT IV 600 V CAT III 1000 V	CAT IV 600 V CAT III 1000 V	CAT IV 600 V CAT III 100 V
Operating temperature	0°C to 50°C	0°C to 50°C	0°C to 50°C	-25°C to 65°C	-25°C to 65°C	-10°C to 50°C
Core jaw diameter	φ55 mm or less 80 × 20 mm busbar	φ15 mm or less	φ46 mm or less	φ100 mm or less	φ180 mm or less	φ254 mm or less

Measurement application	For leak current: Voltage output	
Model name	CLAMP ON LEAK SENSOR	
Model	9657-10	9675
Appearance		
Rated measurement current	5 A AC ^{*2}	5 A AC ^{*2}
Output rate	100 mV/A	100 mV/A
Amplitude accuracy (DC, 45 to 66 Hz)	±1.0% rdg ±0.05% f.s.	±1.0% rdg ±0.005% f.s.
Max. rated voltage to earth	Insulated conductor	Insulated conductor
Operating temperature	0°C to 50°C	0°C to 50°C
Core jaw diameter	φ40 mm or less	φ30 mm or less

9219

For CLAMP ON SENSOR 9695-02

CONNECTION CABLE 9219 For 9695, 3 m (9.84 ft)

The following sensors can be used with Model LR8513 via the DISPLAY UNIT CM7290 or CM7291 (requires OUTPUT CORD L9095)

• AC/DC CURRENT SENSOR CT7631	: φ33 mm, 100 A
• AC/DC CURRENT SENSOR CT7636	: φ33 mm, 200 A*
• AC/DC CURRENT SENSOR CT7642	: φ55 mm, 2000 A
• AC/DC AUTO-ZERO CURRENT SENSOR CT7731	: φ33 mm, 100 A
• AC/DC AUTO-ZERO CURRENT SENSOR CT7736	: φ33 mm, 200 A*
• AC/DC AUTO-ZERO CURRENT SENSOR CT7742	: φ55 mm, 2000 A
• AC FLEXIBLE CURRENT SENSOR CT7044	: φ100 mm, 5000 A*
• AC FLEXIBLE CURRENT SENSOR CT7045	: φ180 mm, 5000 A*
• AC FLEXIBLE CURRENT SENSOR CT7046	: φ254 mm, 5000 A*


^{*} Maximum measurable current when used with the LR8513.
For more detailed information about sensors and output cords, please refer to p.44 & p.45.

LAN Cable Testers


LAN CABLE HiTESTER 3665



Product warranty for 3 years
Accuracy guaranteed for 1 year



Display wire map, cable length, and ID of connected terminal



Pins 3 and 6 have been incorrectly paired with Pins 4 and 5

Included accessories

- TERMINATOR 9690 (ID 0)
- Carrying case
- LR6 alkaline battery × 2
- Instruction manual

Order code **3665**

Options	
1	TERMINATOR 9690-01 ID 1 to 5
2	TERMINATOR 9690-02 ID 6 to 10
3	TERMINATOR 9690-03 ID 11 to 15
4	TERMINATOR 9690-04 ID 16 to 20
5	CARRYING CASE 9249



Measurement	Measurable cable	Twisted-pair cable, characteristic impedance: 100 Ω, shielded and unshielded, CAT 3, 4, 5, 5e, 6 and 6A *Not available for CAT 7
	Compatible connectors	RJ-45 plugs
	Wire Map test (Detectable errors)	Open, short, reversed, transposed, split pairs and other incorrect wiring
	Cable length	2.0 to 300.0 m Accuracy: ±4% rdg ± 1 m (In case of single line)
Other	Direction	Up to 21 cables can be identified ¹⁾
	Functions	Backlight, auto power off
	Operating temperature	0°C to 40°C, 80% rh or less (non-condensating)
	Storage temperature	-10°C to 50°C, 80% rh or less (non-condensating)
Other	Standards	EN61010 (Safety), EN61326 (EMC)
	Power supply	LR6 alkaline battery × 2
	Continuous operating time	50 hours
	Dimensions (W × H × D)	85 × 130 × 33 mm (3.35 × 5.12 × 1.30 in)
Other	Mass	160 g (5.6 oz)

¹⁾Using the supplied Terminator 9690 and optional Models 9690-01 to 9690-04

Signal Generators

DC SIGNAL SOURCE SS7012



Product warranty for 3 years
Accuracy guaranteed for 1 year



Instrumentation system loop test:

- Verify the sensor output of 2-wire transmission sensors
- Verify distributor operation

Included accessories

- INPUT CORD 9168
- TEST LEAD L9170-10
- Spare fuse
- LR6 alkaline battery × 4
- Instruction manual

Order code **SS7012**

Options

Options	
1	INPUT CORD 9168
2	TEST LEAD L9170-10
3	TEMPERATURE PROBE 9184
4	COMMUNICATION PACKAGE SS9000 for reference contact compensation
5	CARRYING CASE 9782
6	CARRYING CASE 9380
7	AC ADAPTER 9445-02

Sourcing	Constant Voltage (CV)	0 to ±2.5000 V Accuracy: ±0.03% of setting ±300 μV 0 to ±25.000 V Accuracy: ±0.03% of setting ±3 mV
	Constant Current (CC)	0 to ±25.000 mA Accuracy: ±0.03% of setting ±3 μA
	Thermoelectromotive Force (TC: 0°C) (TC: RJ)	(K) -174.0°C to 1372.0°C (E) -220.0°C to 839.0°C (J) -208.0°C to 1108.0°C (T) -169.0°C to 400.0°C (R) -50°C to 1768°C (S) -50°C to 1768°C (B) 300°C to 1820°C (N) -113.0°C to 1300.0°C Accuracy: ±0.05% of setting ±0.5°C
	Memory Sourcing (RECALL, SCAN)	One type for each function: CV2.5, CV25, CC, TC (0°C and RJ)
Measurement	Standard Resistance (Rs)	100 Ω
	Voltage	0 V to ±2.8000 V (Accuracy: ±0.03% rdg ±300 μV) 0 V to ±28.000 V (Accuracy: ±0.03% rdg ±3 mV)
	Current	0 A to ±28.000 mA (Accuracy: ±0.03% rdg ±3 μA)
	Temperature	-25.0 to 80.0°C (Accuracy: ±0.5°C at 23 ±5 °C)
Other	Interfaces	USB Communication
	Operating temperature	0°C to 40°C, 80% rh or less (non-condensating)
	Storage temperature	-20°C to 50°C, 80% rh or less (non-condensating)
	Standards	EN61010 (Safety), EN61326 (EMC)
Other	Power supply	LR6 alkaline battery × 4 HR6 Ni-MH batteries Z0101 AC ADAPTER 9445-02/-03
	Continuous operating time	
	Dimensions (W × H × D)	104 × 180 × 58 mm (4.09 × 7.09 × 2.28 in)
	Mass	570 g (20.1 oz) without batteries



Lux Testers

LUX METER FT3424, FT3425



Product warranty for 3 years
Accuracy guaranteed for 2 years



FT3424

FT3425



Please see www.hioki.com
for list of supported regions.



**GENNECT
Cross**



Extension cart minimizes
physical stress



- Built-in Bluetooth® wireless technology
- Verify and record measured data with free GENNECT Cross mobile app
- *Available only with products displayed with the GENNECT Cross icon

Order code **FT3424**

Order code **FT3425**

Measurement	Standards	DIN 5032-7: 1985 Class B/JIS C 1609-1: 2006 General Class AA
	Light receiving element	Silicon photo-diode
	Measurement ranges	20.00 lx/200.0 lx/2000 lx/20000 lx/200000 lx
	Linearity	±2% rdg ⁻¹
	D/A output	Output level: 2 V / range f.s. Output accuracy: ±1% rdg ±5 mV (at output rate)
Other	Functions	Timer hold function, memory function (up to 99 measured data can be saved.), hold, auto power off, buzzer sound, backlight, zero adjustment
	Interfaces	USB2.0 (FT3425 only: Bluetooth® 4.0LE)
	Operating temperature	-10°C to 40°C, 80% RH or less (non-condensating)
	Storage temperature	-20°C to 50°C, 80% RH or less (non-condensating)
	Accuracy guarantee for temperature and humidity	21°C to 27°C, 75% RH or less (non-condensating)
	Dustproof and waterproof	IP40 (EN60529)
	Standards	EN61010 (Safety), EN61326 (EMC), JIS C 1609-1: 2006 General Class AA, DIN 5032-7: 1985 Class B
	Power supply	LR6 alkaline battery × 2, or USB bus power (5 V DC)
	Continuous operating time	300 hours (Bluetooth® communication OFF)
	Dimensions (W × H × D)	78 × 170 × 39 mm (3.07 × 6.69 × 1.54 in)
	Weight	FT3424: 310 g (10.9 oz), FT3425: 320 g (11.3 oz)

* Multiply by 1.5 for display values in excess of 3000 lx.

Included accessories

- CARRYING CASE
- LR6 alkaline battery × 2
- Sensor cap (with strap)
- Strap
- USB cable (0.9 m)
- CD-R (USB driver, dedicated computer application software, and communications specifications)
- Instruction manual
- Precautions Concerning Use of Equipment that Emits Radio Waves (only FT3425)

Options	
1	EXTENSION CART Z5023
2	CONNECTION CABLE L9820
3	CARRYING CASE C0202 Soft case
4	CARRYING CASE C0201 Semi-hard case
5	OUTPUT CORD L9094 Mini plug to banana 1.5 m (4.92 ft)
6	OUTPUT CORD L9095 Connect to BNC terminal 1.5 m (4.92 ft)
7	OUTPUT CORD L9096 Connect to terminal block 1.5 m (4.92 ft)



Temperature Testers

INFRARED THERMOMETER FT3700-20, FT3701-20




Product warranty for 1 year
Accuracy guaranteed for 1 year




FT3700



FT3701



Measure the average temperature inside a circle whose diameter is defined by the two indicated points.




Measure areas that cannot be touched or unreachable locations due to moving parts

Included accessories

- CARRYING CASE
- LR03 alkaline battery × 2
- Instruction manual

Order code **FT3700-20**

Order code **FT3701-20**

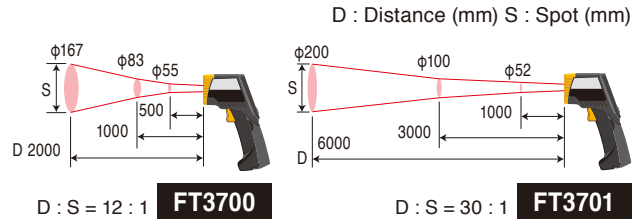

Measurement range	FT3700: -60.0 to 550.0°C (-76 to 1022°F) ¹⁾ FT3701: -60.0 to 760.0°C (-76 to 1400°F) ¹⁾
Accuracy	0.0 to 100.0°C (-32.0 to 212.0°F): ±2°C 100.1 to 500.0°C (212.1 to 932.0°F): ±2% rdg -35.0 to -0.1°C (-31.0 to 31.9°F): ±10% rdg ±2°C ²⁾
Measurement field diameter	FT3700: φ83 mm at 1000 mm FT3701: φ100 mm at 3000 mm
Functions	MAX/MIN/DIF (MAX-MIN)/AVG measurement, alarm, backlight, continuous measurement mode, auto power off
Other	
Operating temperature	0°C to 50°C, 80% RH or less (non-condensating)
Storage temperature	-10°C to 50°C, 80% RH or less (non-condensating) 50°C to 60°C, 70% RH or less (non-condensating)
Accuracy guarantee for temperature and humidity	23°C ±3°C, 80% RH or less (non-condensating)
Standards	IEC 60825-1 CLASS2 (Laser), EN61326 (EMC)
Power supply	LR03 alkaline battery × 2
Continuous operating time	140 hours
Dimensions (W × H × D)	48 × 172 × 119 mm (1.89 × 6.77 × 4.69 in)
Weight	256 g (9.0 oz)

¹⁾ Guaranteed accuracy range is -35 to 500°C.

²⁾ -60.0 to -35.1°C (-76.0 to -31.1°F) : Accuracy not specified

Clamp

Insulation

DMMS

Detectors

Earth

Power quality

Power consumption

Battery

PV

Logger

LAN

Signal

Lux

Temperature

Product warranties

HIOKI products are generally covered by a three-year warranty.


Product warranty	In the event HIOKI is responsible for the failure of a product during the warranty term beginning on the date of purchase (or beginning in the month the product was manufactured if the date of purchase is unclear), we will repair or replace the product free of charge.
Warranty scope	We check products on a standalone basis to verify their specifications, performance, and functionality. Although we verify proper operation of components that are connected to HIOKI products in standard configurations, we ask that customers verify proper operation of their HIOKI products when connected to other manufacturers' products. The scope of HIOKI's warranty is limited to HIOKI products. Connected devices and issues caused by connected devices are considered outside the scope of the warranty. In the event of physical damage, any compensation that might be provided by HIOKI is limited to the purchase price of the product
Accuracy guarantee	For products with an accuracy guarantee, we guarantee the level of accuracy indicated in the specifications for a certain period of time following shipment from the factory. In the event of an accuracy defect during that period of time, we will adjust the product free of charge.

Calibration and repair service

Calibration Expiration (Calibration Interval)	Values obtained on the date of calibration are used as the calibration results. When calibration expires (i.e., the calibration interval) depends on the customer's operating conditions and environment. Consequently, the customer is ultimately responsible for determining calibration expiration while taking into account the calibration interval recommended by Hioki.
Recommended calibration interval	Hioki recommends that each product's accuracy guarantee period be treated as the recommended calibration interval.
Guarantee after Calibration Service*1	If a customer reports a loss of accuracy after calibration while the instrument in question is covered by the recommended calibration interval and we are able to verify the issue, we will adjust the instrument free of charge. (If the product is subject to a regular calibration request, we will adjust it as part of the calibration fee.)
Guarantee Conditions	<ul style="list-style-type: none">• If a loss of accuracy is caused by a part's having reached its service life or deteriorated, fees will apply to the repair.• If the loss of accuracy is deemed likely to have been caused by damage or by the operating or storage environment, fees will apply to the repair.• If a product is deemed likely to experience a loss of accuracy after shipment, for example due to the end of the repair period, we may contact the customer and decline to offer a guarantee.• The guarantee applies to products that are calibrated at Hioki.
Guarantee of repaired products	If, within six months of the original repair, HIOKI is responsible for an issue requiring an additional repair (a repair of the same issue) of a product that has been used as described in its user manual, we will repair it free of charge.
Repair term	We may improve products or switch models without notice in order to enhance the competitiveness of our products and our productivity. We will repair discontinued products for a minimum of five years from the date of their discontinuation, although we may elect to propose that the customer switch to an alternative model if it is difficult to repair a product due to social or economic conditions. *Once five years have passed since a product's discontinuation, we will only accept inspection and calibration requests for that product if we are able to perform that work in-house.

*1: Not all products are covered by this guarantee.

Quality of HIOKI's calibration and repair service

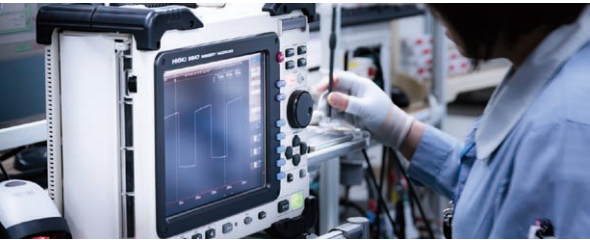


80 years of history and fine-grained, expert service
Technicians performing calibration, adjustment, and repair work undergo in-house training to ensure they possess the specialized expertise and skills that such work demands.

Precise calibration and adjustment guidelines compiled by product designers
We determine everything from the procedures for measuring instrument functionality checks to calibration points based on the results of reviews conducted by designers who are well versed in the characteristics of products' internal circuitry and the principles that underlie their operation. In this way, we are able to provide optimal, extensive calibration and adjustment service as only the manufacturer can.

Highly reliable service that's traceable to national standards
The standard devices we use to calibrate and adjust products are all linked to national standards, ensuring that we can issue inspection reports with accurate, reliable calibrated values.

Comprehensive calibration and repair service with fast turnaround
If we discover a malfunction or failure during the calibration process, we'll contact you to let you know where the problem is and what's necessary to address it. If you wish, we'll then repair the product. This capability eliminates unnecessary back-and-forth so you can put your product back to work as soon as possible.

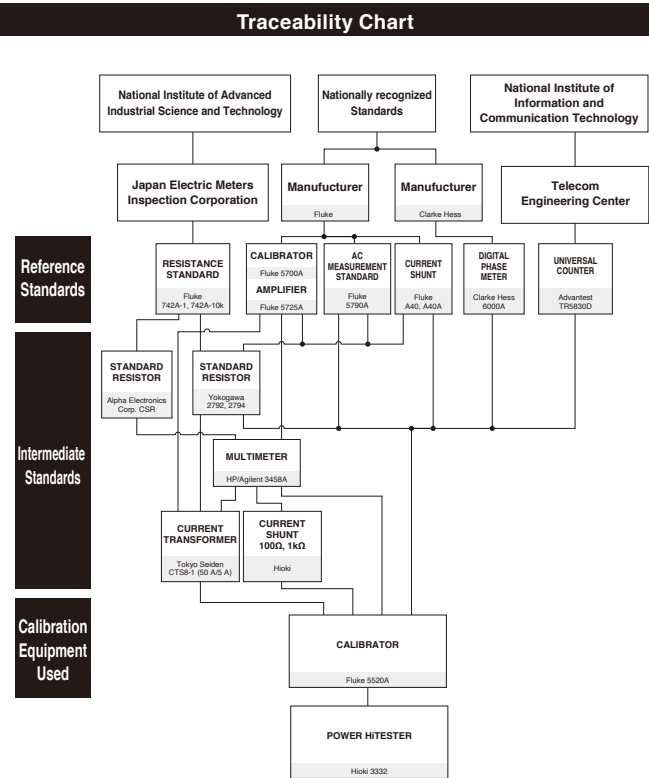

Calibration and Repair Service

(1) Service content

Hioki's calibration services were updated effective April 2022.

"Calibration Services"


When an instrument is calibrated and its measured values are found not to satisfy internal Hioki standards, the instrument is adjusted. Through the ongoing use of calibration services offered as only an instrument manufacturer can, customers are able to use their instruments with peace of mind while maintaining their precision.

This calibration service will allow us to return products to customers with minimal downtime, since there are no work interruptions.

Notes

*If you do not wish your instrument to be adjusted, please let us know when you request calibration. Your product will be returned without adjustment, even if the calibration report indicates a FAIL judgment (non-compliance).

*This service does not extend to products that cannot be adjusted or to discontinued products.

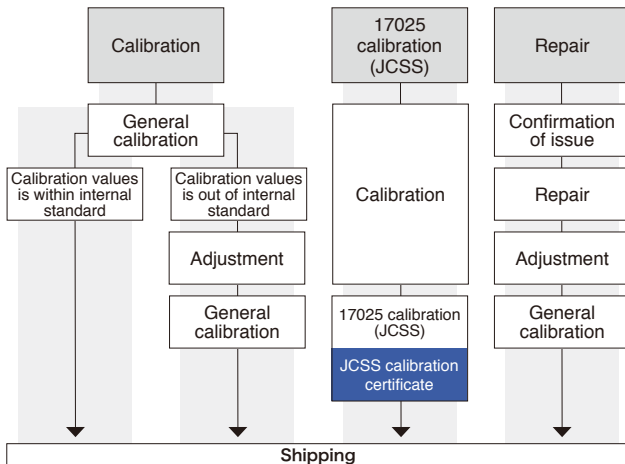

*JCSSL calibration is also available as a standalone service

(2) Documents we can issue and their content

Sample documents are also available on Hioki's website.



Test report

- Calibration results
- Judgment



General calibration certificate

- Calibration certificate declaration
- Information about equipment used in calibration




JCSSL calibration certificate

- Calibration results
- Coverage factor
- Calibration certificate declaration
- ilac-MRA, IA Japan, and JCSSL logos




Traceability certificate (special-order)

- Calibration certificate declaration
- Information about lighting standards



Traceability chart (overall)

An overview tracing Hioki product groups to national standards via individual standard devices



Traceability chart (model-specific)

A detailed diagram tracing a particular product model to national standards via individual standard devices

Calibration

Calibration provides a way to check the condition of a measuring instrument by comparing the ideal value indicated by a standard device with the value indicated by the instrument being calibrated.


Adjustment

Calibration values will be optimized so that the instrument satisfies Hioki's internal standards.


If an instrument is adjusted as part of calibration service

Values are optimized so that they satisfy Hioki's internal standards to reduce the risk that they will subsequently exceed the tolerance.

Adjustment is performed since the tolerance is anticipated to be exceeded during the next calibration.

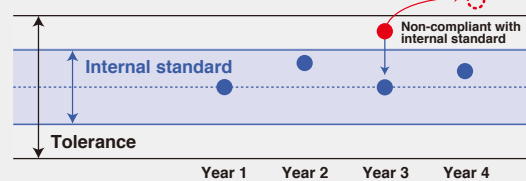

Difference between general calibration and 17025 calibration (JCSSL)

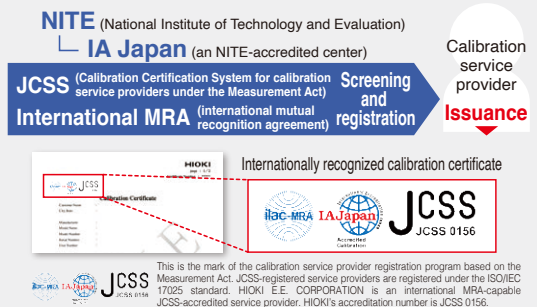

JCSSL calibration is a type of third-party-accredited calibration based on ISO/IEC 17025. General calibration is a type of calibration determined by HIOKI based on ISO 9001. HIOKI can issue calibration certificates bearing the JCSSL mark for instruments that have undergone JCSSL certification, and they are valid internationally since they are international MRA-compliant.

Differences in calibration points

General calibration

Calibration is performed for all parameters that need to be checked in order to maintain the performance of the measuring instrument as determined by the product designer.

17025 calibration (JCSSL)

Calibration is performed using points registered as the JCSSL calibration range and selected by the customer.

Differences in information on calibration documents

General calibration

- Calibration results: Included on inspection report
- Inaccuracies: Not included
- Traceability chart: Yes

17025 calibration (JCSSL)

- Calibration results: Included on calibration certificate
- Inaccuracies: Included on calibration certificate
- Traceability chart: No
(*JCSSL and other logos certify traceability.)


Service capability and warranty duration

You can find out whether HIOKI accepts repair and calibration requests for your instrument, associated lead times if so, and the information listed below simply by entering the product model number on HIOKI's website.

Product Search	012345	Search	Availability of repair and calibration service
Results	<div> <div>✓ Available</div> <div>✗ Not available</div> <div>⚡ Partially available (see remarks)</div> </div>		
	Model	Product	Available services
			Calibration Repair
	012345	DIGITAL MULTIMETER	✓
	Recommended calibration interval	12 months	
	Product warranty period	36 months	
			Date production discontinued

Sales and service network

● HQ ● Regional Group HQ ● Offices of Group Companies

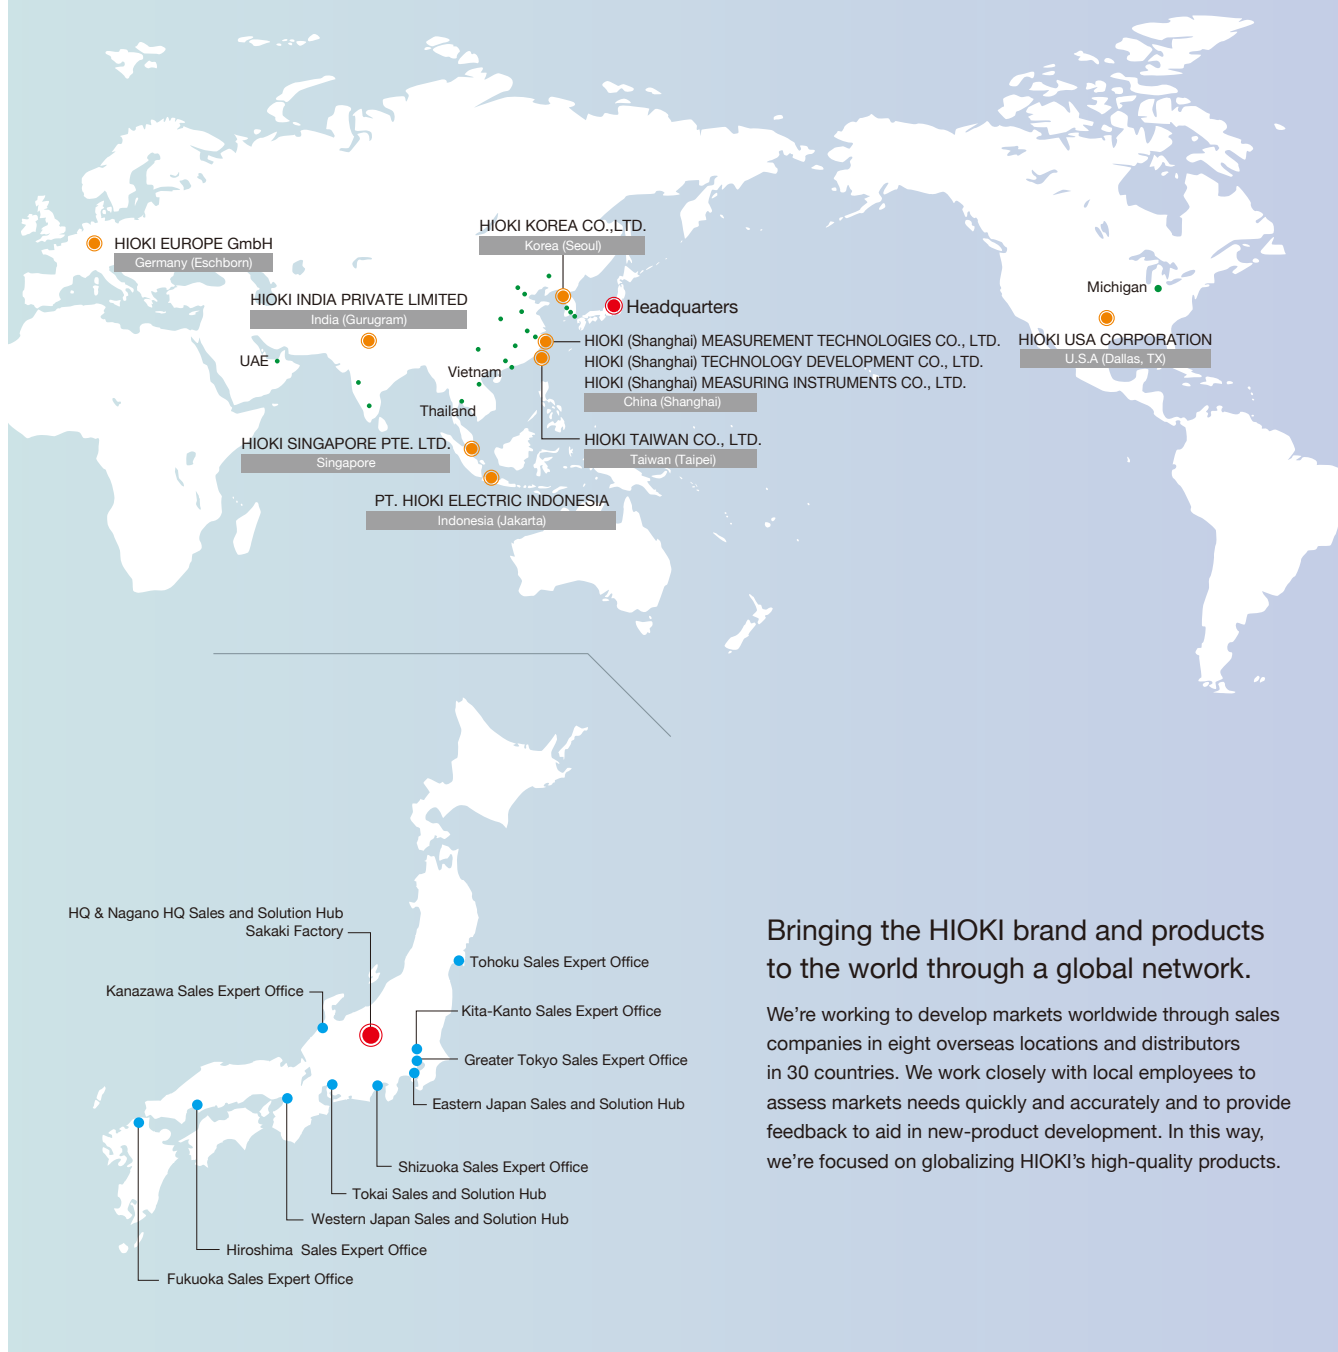

Bringing the HIOKI brand and products to the world through a global network.

We're working to develop markets worldwide through sales companies in eight overseas locations and distributors in 30 countries. We work closely with local employees to assess markets needs quickly and accurately and to provide feedback to aid in new-product development. In this way, we're focused on globalizing HIOKI's high-quality products.

*The Bluetooth® word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. and any use of such marks by HIOKI E.E. CORPORATION is under license.
Note: Company names and product names appearing in this brochure are trademarks or registered trademarks of various companies.

HIOKI

HIOKI E. E. CORPORATION

HEADQUARTERS

81 Koizumi,
Ueda, Nagano 386-1192 Japan
<https://www.hioki.com/>



Scan for all
regional contact
information

DISTRIBUTED BY