

ETAS


HIOKI



ETAS : INCA, HIOKI Add-on ^(*), ES592 Interface Module
 HIOKI : POWER ANALYZER PW8001, AC/DC Current Sensors

Measurement and Calibration of Power Control Units


The Combination of INCA and PW8001
 Accelerates Accurate Measurement and Optimization of PCU Parameters

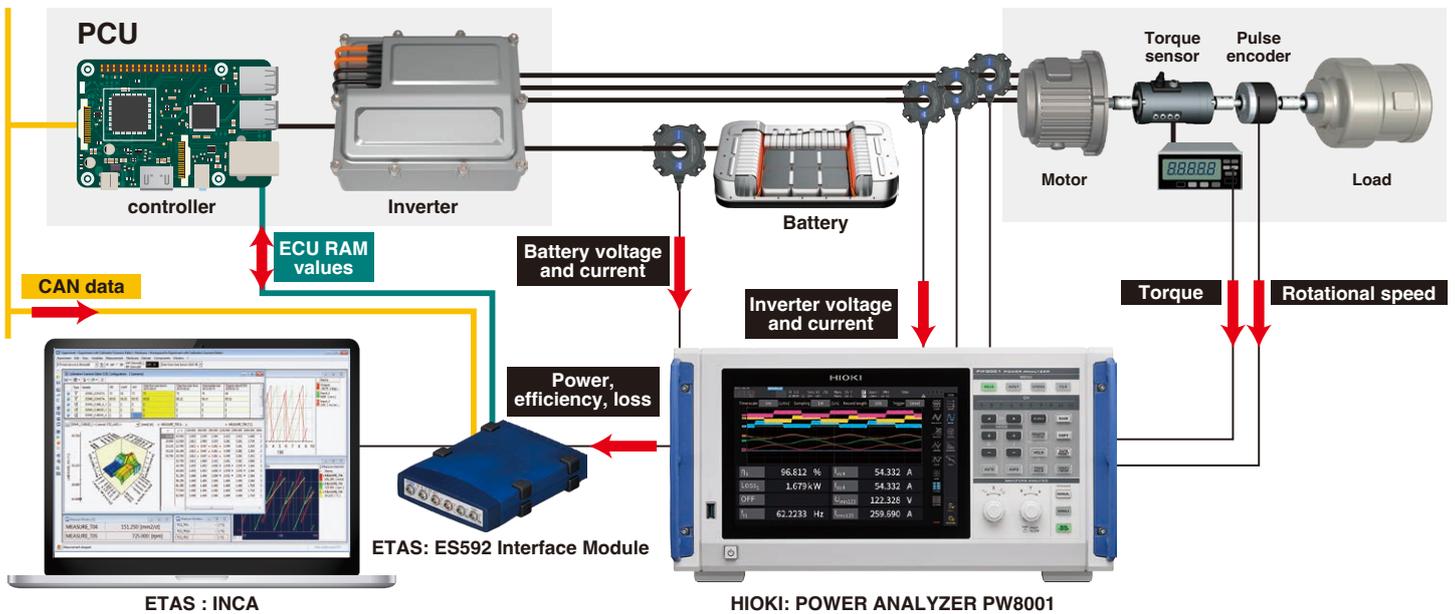

Fast PCU calibration with accurate power measurements
 Simultaneously monitor CAN bus data and ECU RAM values

Increase efficiency of measurement experiments and calibration
 INCA measurement, calibration, and diagnosis tool

Ideal for SiC inverter measurement
 High-accuracy, wide-band pass-through type current sensors

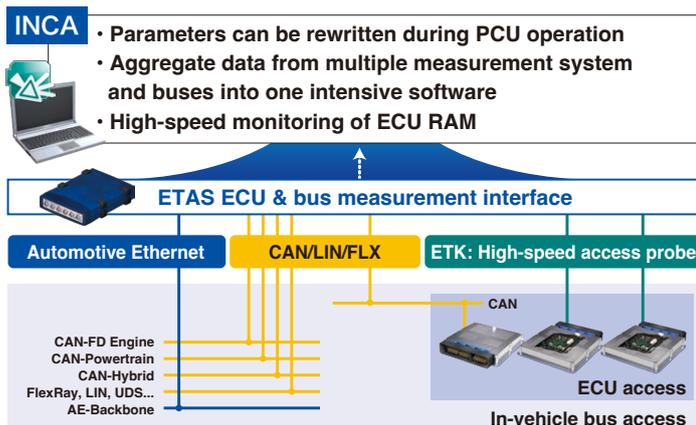

Model	Rating	Frequency characteristics	Measurable conductor diameter
CT6904A-2	800 A	DC to 4 MHz	φ32 mm
CT6904A	500 A	DC to 4 MHz	φ32 mm
CT6877A	2000 A	DC to 1 MHz	φ80 mm
CT6876A	1000 A	DC to 1.5 MHz	φ36 mm
CT6875A	500 A	DC to 2 MHz	φ36 mm