

RM3545A Measurement Lead Selection Guide

RM3545A measurement leads

Hioki offers five types of measurement leads to facilitate accurate measurement of an array of measurement targets. Please choose the best lead for your application after reviewing the shape of the measurement target and contact workability.


Pin Type Lead L2100

This lead facilitates 4-terminal measurement and need only be placed in contact with the measurement target. Pins with spring-loaded tips ensure stable contact. Since the SOURCE and SENSE pins are positioned at the optimal interval, this lead is ideal for low-resistance measurement.

For low-resistance measurement^{*1}

Pin interval: 2.5 mm

*1: Low resistance refers to the ranges listed below (current setting in parentheses), which use a measurement current of 100 mA or greater. Accuracy is not guaranteed when using other ranges. 1000 $\mu\Omega$ range (HIGH, LOW), 10 m Ω range (HIGH, LOW), 100 m Ω range (HIGH, LOW), 1000 m Ω range (HIGH only)

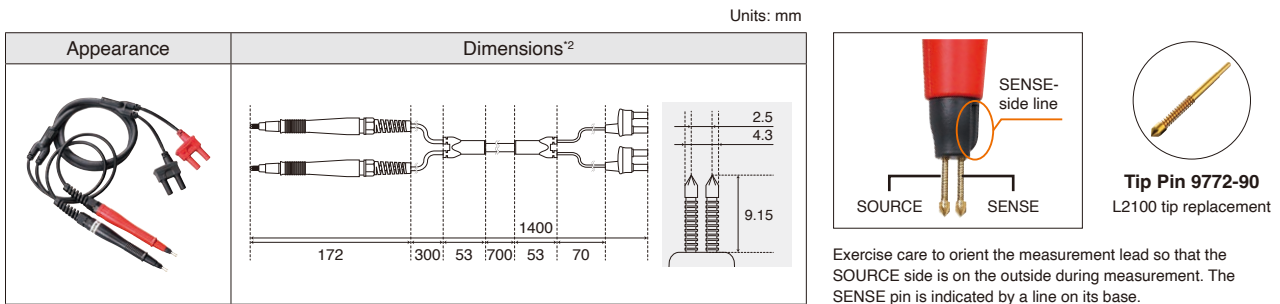


The L2100 lacks shielded terminals.
If you plan to measure high resistance values, please consider one of the following leads, which all have shielded terminals.

Clip Type Lead L2101

This lead facilitates 4-terminal measurement and need only be clipped to the measurement target. Its convenient design frees the operator's hands for other tasks while measurement is ongoing. However, the L2100 is recommended for low-resistance ranges with a measurement current of 100 mA or greater.

Clipable diameter: 0.3 mm to 5 mm

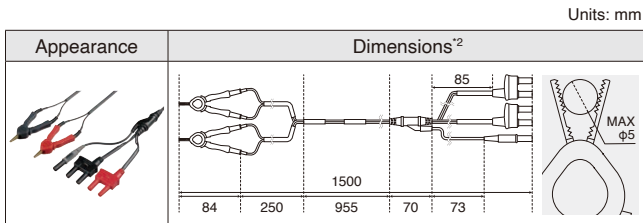


Pin Type Lead L2102

This lead facilitates 4-terminal measurement and need only be placed in contact with the measurement target. It's a convenient choice when testing flat terminals to which it's not practical to clip the leads or compact measurement targets with a small contact area.

Pin outer diameter: ϕ 1.8 mm


Pin interval: 0.6 mm

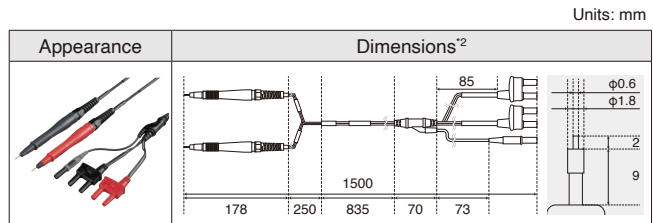

Pin Type Lead L2103

This lead facilitates 4-terminal measurement and need only be placed in contact with the measurement target. It's a convenient choice when testing compact measurement targets with a small contact area.


Pin interval: 0.2 mm

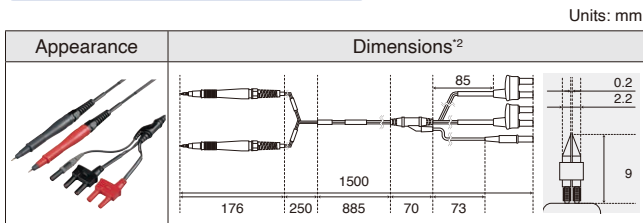

4-Terminal Lead L2104

This 4-terminal lead has a clip for the SOURCE terminal and a wand for the SENSE terminal. It's ideal when you need to make measurements while positioning the SOURCE and SENSE terminals at some distance from each other.

All terminals are independent of each other.

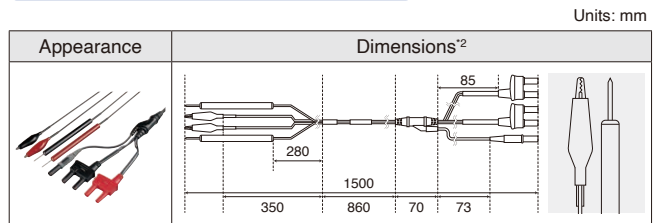

*2: dimensions other than total length are approximations.